

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244084

Luminaire Tested: **LSR8B40D010 EC8B409730 8LBSOLI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244084
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-12)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B40D010 EC8B409730 8LBSOLI
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3653.9 lumens
Efficiency: N/A
Efficacy: 89.3 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.24
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244084

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBSOLI

Luminous Intensity Polar Plot

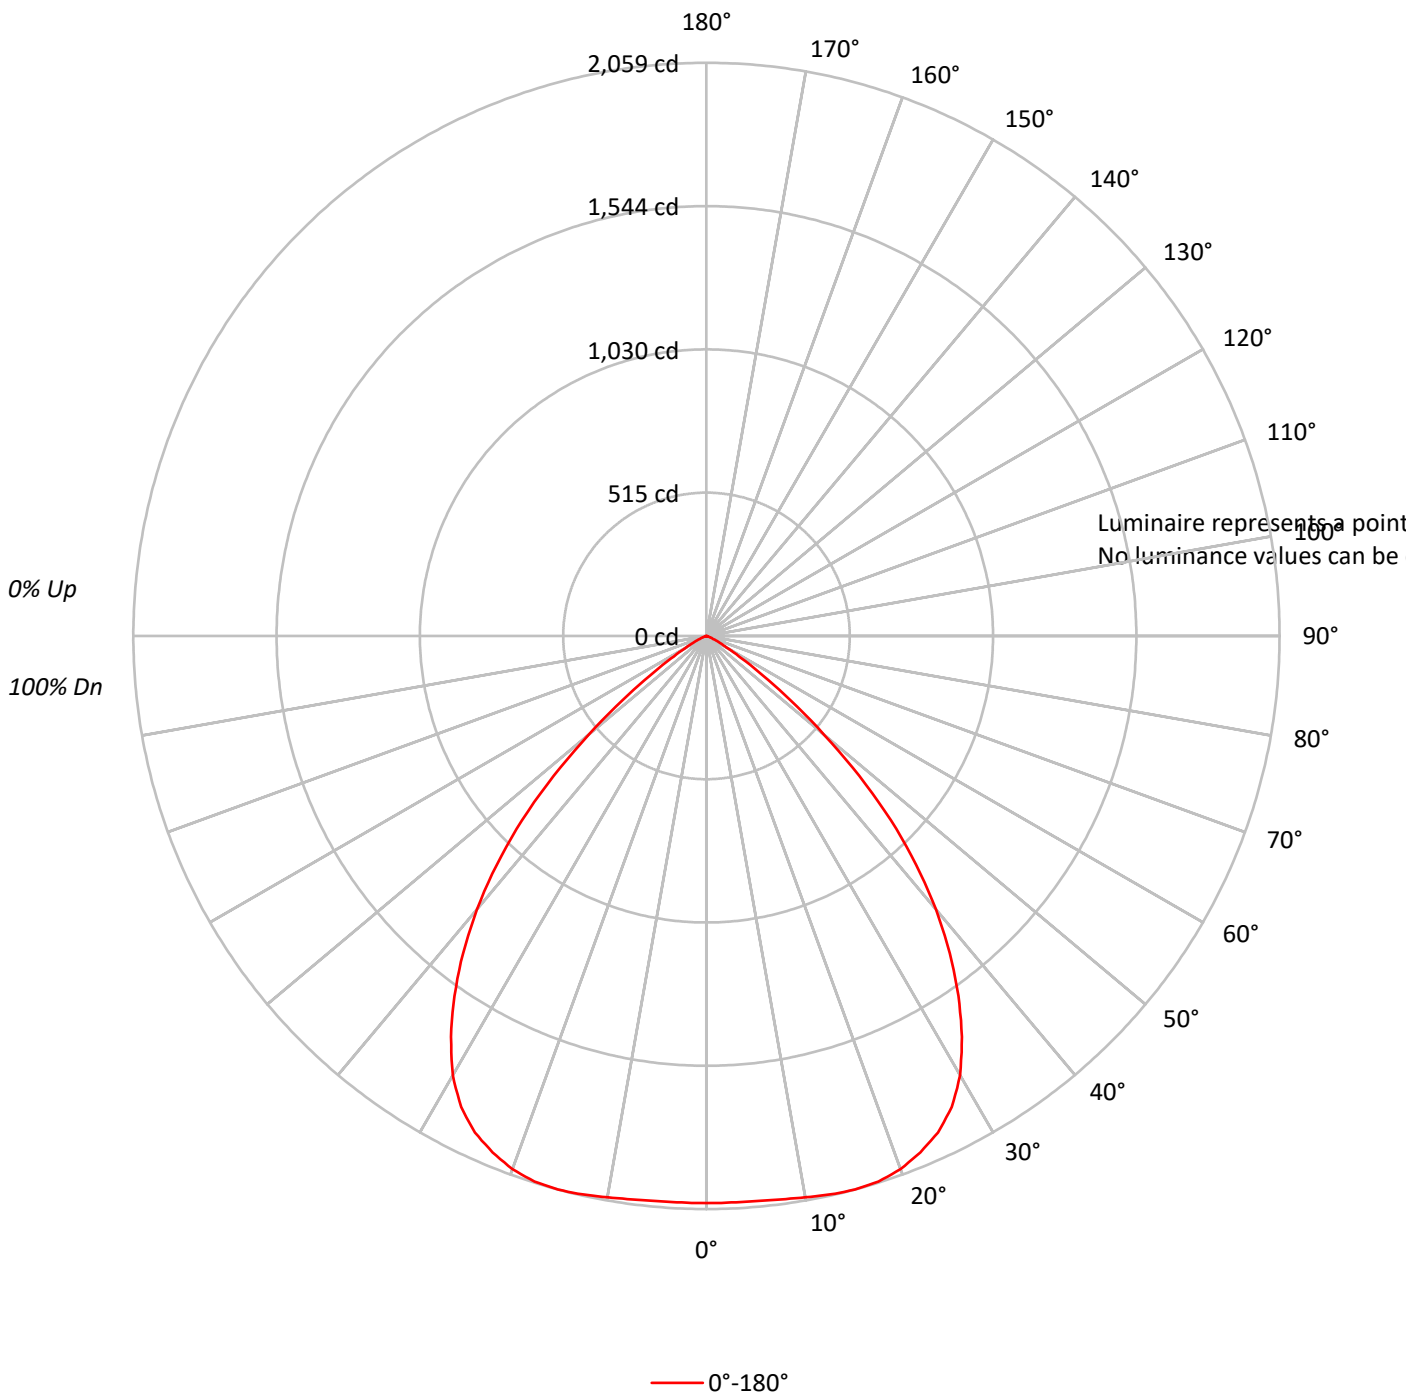



TEST NUMBER: P244084

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBSOLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96	94	93	91
2	105	99	95	91	103	98	93	90	94	91	88		91	88	86		88	86	84	82
3	98	91	85	80	96	89	84	79	86	82	78		84	80	77		82	78	75	74
4	92	83	76	71	90	82	75	71	79	74	70		77	73	69		75	71	68	66
5	86	76	69	63	84	75	68	63	73	67	63		71	66	62		69	65	61	60
6	80	70	62	57	79	69	62	57	67	61	56		66	60	56		64	59	56	54
7	75	64	57	52	74	63	56	52	62	56	51		61	55	51		59	54	51	49
8	71	59	52	47	69	58	52	47	57	51	47		56	51	46		55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43		52	47	43		51	46	42	41
10	62	51	44	39	61	50	44	39	50	43	39		49	43	39		48	43	39	37

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P244084

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBSOLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	194.9	5.3
10°-20°	581.9	15.9
20°-30°	901.5	24.7
30°-40°	979.0	26.8
40°-50°	711.4	19.5
50°-60°	241.8	6.6
60°-70°	38.5	1.1
70°-80°	4.1	0.1
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1678.3	45.9
0°-40°	2657.3	72.7
0°-60°	3610.5	98.8
0°-90°	3653.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3653.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2037	
5°	2038	195
15°	2059	582
25°	1968	901
35°	1578	979
45°	937	711
55°	246	242
65°	34	38
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P244084

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBSOLI

CANDELA DISTRIBUTION (FULL):

0°	
0°	2037.3
2.5°	2037.3
5°	2038.4
7.5°	2041.5
10°	2047.8
12.5°	2055.1
15°	2059.3
17.5°	2055.1
20°	2038.4
22.5°	2008.0
25°	1968.1
27.5°	1908.4
30°	1822.5
32.5°	1708.2
35°	1578.3
37.5°	1436.8
40°	1282.7
42.5°	1116.1
45°	936.9
47.5°	744.1
50°	552.3
52.5°	378.3
55°	246.3
57.5°	149.9
60°	90.1
62.5°	55.5
65°	33.5
67.5°	18.9
70°	8.4
72.5°	5.2
75°	3.1
77.5°	2.1
80°	2.1
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)