

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244367

Luminaire Tested: **LSR8B50D010 EC8B50927 8LBN0H**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244367
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27944)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B50D010 EC8B50927 8LBN0H
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3906.0 lumens
Efficiency: N/A
Efficacy: 73.7 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.79
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 53
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244367

CATALOG NUMBER: LSR8B50D010 EC8B50927 8LBN0H

Luminous Intensity Polar Plot

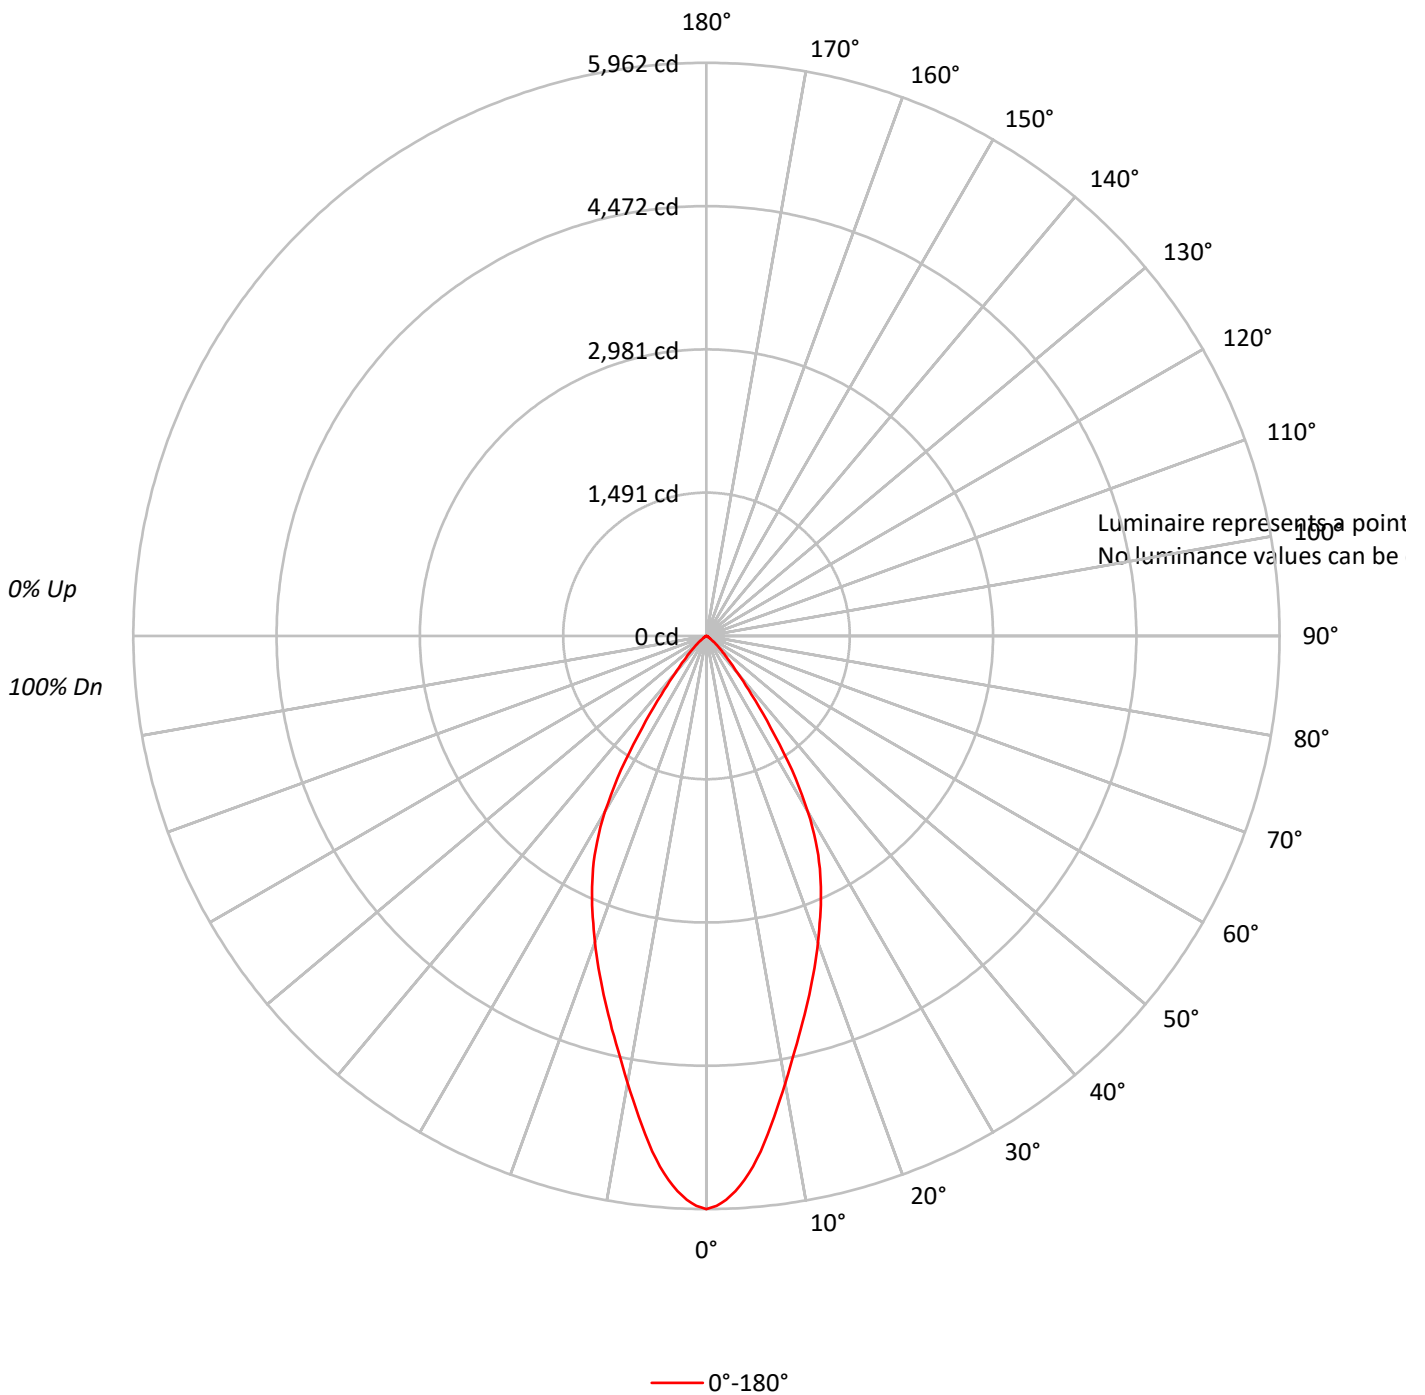



TEST NUMBER: P244367

CATALOG NUMBER: LSR8B50D010 EC8B50927 8LBN0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86		90	87	85		88	86	83	82
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84	80	78	76
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79	76	73	72
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75	71	69	67
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71	67	64	63
8	81	71	66	62	79	71	65	61	70	65	61		69	64	61		68	64	61	59
9	77	68	62	58	76	67	62	58	66	61	58		65	61	58		64	60	57	56
10	74	64	59	55	73	64	58	55	63	58	55		62	58	54		61	57	54	53

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P244367

CATALOG NUMBER: LSR8B50D010 EC8B50927 8LBN0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	501.4	12.8
10°-20°	1120.5	28.7
20°-30°	1274.0	32.6
30°-40°	748.2	19.2
40°-50°	200.8	5.1
50°-60°	47.6	1.2
60°-70°	10.9	0.3
70°-80°	2.4	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2895.9	74.1
0°-40°	3644.1	93.3
0°-60°	3892.5	99.7
0°-90°	3906.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3906.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5962	
5°	5540	501
15°	4008	1121
25°	2811	1274
35°	1165	748
45°	240	201
55°	48	48
65°	11	11
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P244367

CATALOG NUMBER: LSR8B50D010 EC8B50927 8LBN0H

CANDELA DISTRIBUTION (FULL):

0°	
0°	5962.5
1°	5929.5
2°	5868.9
3°	5783.2
4°	5672.4
5°	5540.4
6°	5391.3
7°	5222.5
8°	5053.6
9°	4883.5
10°	4721.2
11°	4562.9
12°	4413.8
13°	4275.3
14°	4136.8
15°	4007.6
16°	3880.9
17°	3755.6
18°	3634.2
19°	3511.6
20°	3391.5
21°	3271.5
22°	3156.8
23°	3043.2
24°	2927.1
25°	2811.2
26°	2691.1
27°	2560.5
28°	2423.2
29°	2272.8
30°	2110.6
32.5°	1655.6
35°	1164.8
37.5°	767.7
40°	502.6
42.5°	347.0
45°	240.1
47.5°	164.9
50°	109.5
52.5°	71.2
55°	47.5
57.5°	31.6
60°	21.2
62.5°	14.5
65°	10.6



TEST NUMBER: P244367

CATALOG NUMBER: LSR8B50D010 EC8B50927 8LBN0H

CANDELA DISTRIBUTION (continued):

	0°
67.5°	6.6
70°	3.9
72.5°	2.6
75°	2.6
77.5°	1.3
80°	1.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)