

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245375

Luminaire Tested: **LSR8B50D010 EC8B50927 8LBS0WH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P245375  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-15)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B50D010 EC8B50927 8LBS0WH  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 2700 CCT WITH WHEAT TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4816.1 lumens  
Efficiency: N/A  
Efficacy: 90.9 lumens/watt  
Spacing Criteria (0/90/45): 1.27 / 1.27 / 1.23  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 53  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P245375

CATALOG NUMBER: LSR8B50D010 EC8B50927 8LBS0WH

### Luminous Intensity Polar Plot

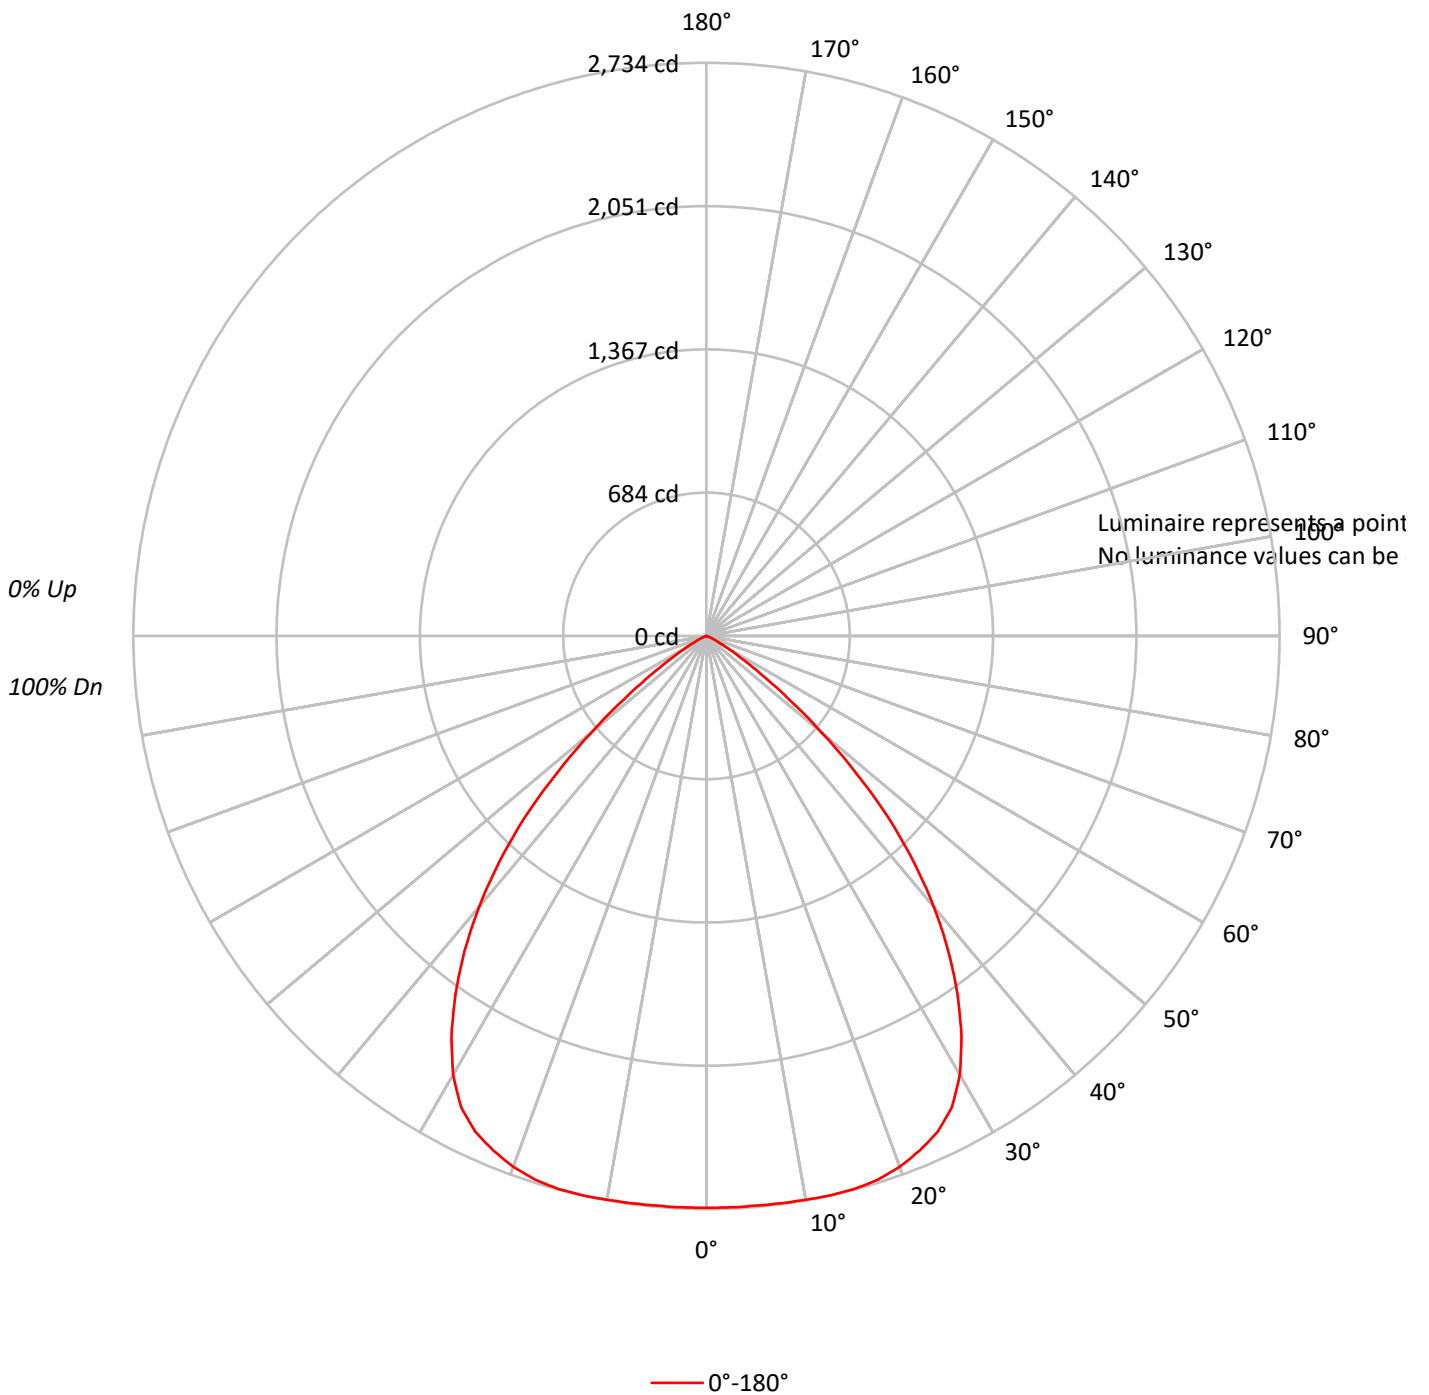



TEST NUMBER: P245375

CATALOG NUMBER: LSR8B50D010 EC8B50927 8LBS0WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	100	95	91	103	98	93	90	94	91	88	91	88	86	89	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	92	83	76	71	90	82	76	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	70	65	62	60
6	80	70	63	57	79	69	62	57	67	61	57	66	60	56	64	60	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	59	52	47	69	59	52	47	57	51	47	56	51	47	55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41
10	63	51	44	40	61	51	44	40	50	44	39	49	43	39	48	43	39	38

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P245375

CATALOG NUMBER: LSR8B50D010 EC8B50927 8LBS0WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	260.5	5.4
10°-20°	771.7	16.0
20°-30°	1194.8	24.8
30°-40°	1294.4	26.9
40°-50°	931.4	19.3
50°-60°	311.6	6.5
60°-70°	47.1	1.0
70°-80°	4.0	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2227.0	46.2
0°-40°	3521.4	73.1
0°-60°	4764.4	98.9
0°-90°	4816.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4816.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2728	
5°	2728	261
15°	2731	772
25°	2609	1195
35°	2087	1294
45°	1227	931
55°	315	312
65°	42	47
75°	3	4
85°	0	1
90°	0	



TEST NUMBER: P245375

CATALOG NUMBER: LSR8B50D010 EC8B50927 8LBS0WH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2727.9
2.5°	2727.9
5°	2727.9
7.5°	2729.4
10°	2730.7
12.5°	2733.5
15°	2730.7
17.5°	2719.6
20°	2694.5
22.5°	2656.8
25°	2609.4
27.5°	2534.2
30°	2417.1
32.5°	2263.7
35°	2086.8
37.5°	1895.7
40°	1688.1
42.5°	1465.0
45°	1226.7
47.5°	968.7
50°	719.2
52.5°	493.4
55°	315.0
57.5°	188.2
60°	113.0
62.5°	68.3
65°	41.8
67.5°	20.9
70°	9.8
72.5°	4.2
75°	2.8
77.5°	2.8
80°	1.3
82.5°	1.3
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)