

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251286

Luminaire Tested: **LSR8B60D010 EC8B60830 8LBS0GPH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P251286  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-16)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B60D010 EC8B60830 8LBS0GPH  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 3000 CCT WITH GRAPHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5941.0 lumens  
Efficiency: N/A  
Efficacy: 99.8 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 59.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P251286

CATALOG NUMBER: LSR8B60D010 EC8B60830 8LBS0GPH

### Luminous Intensity Polar Plot

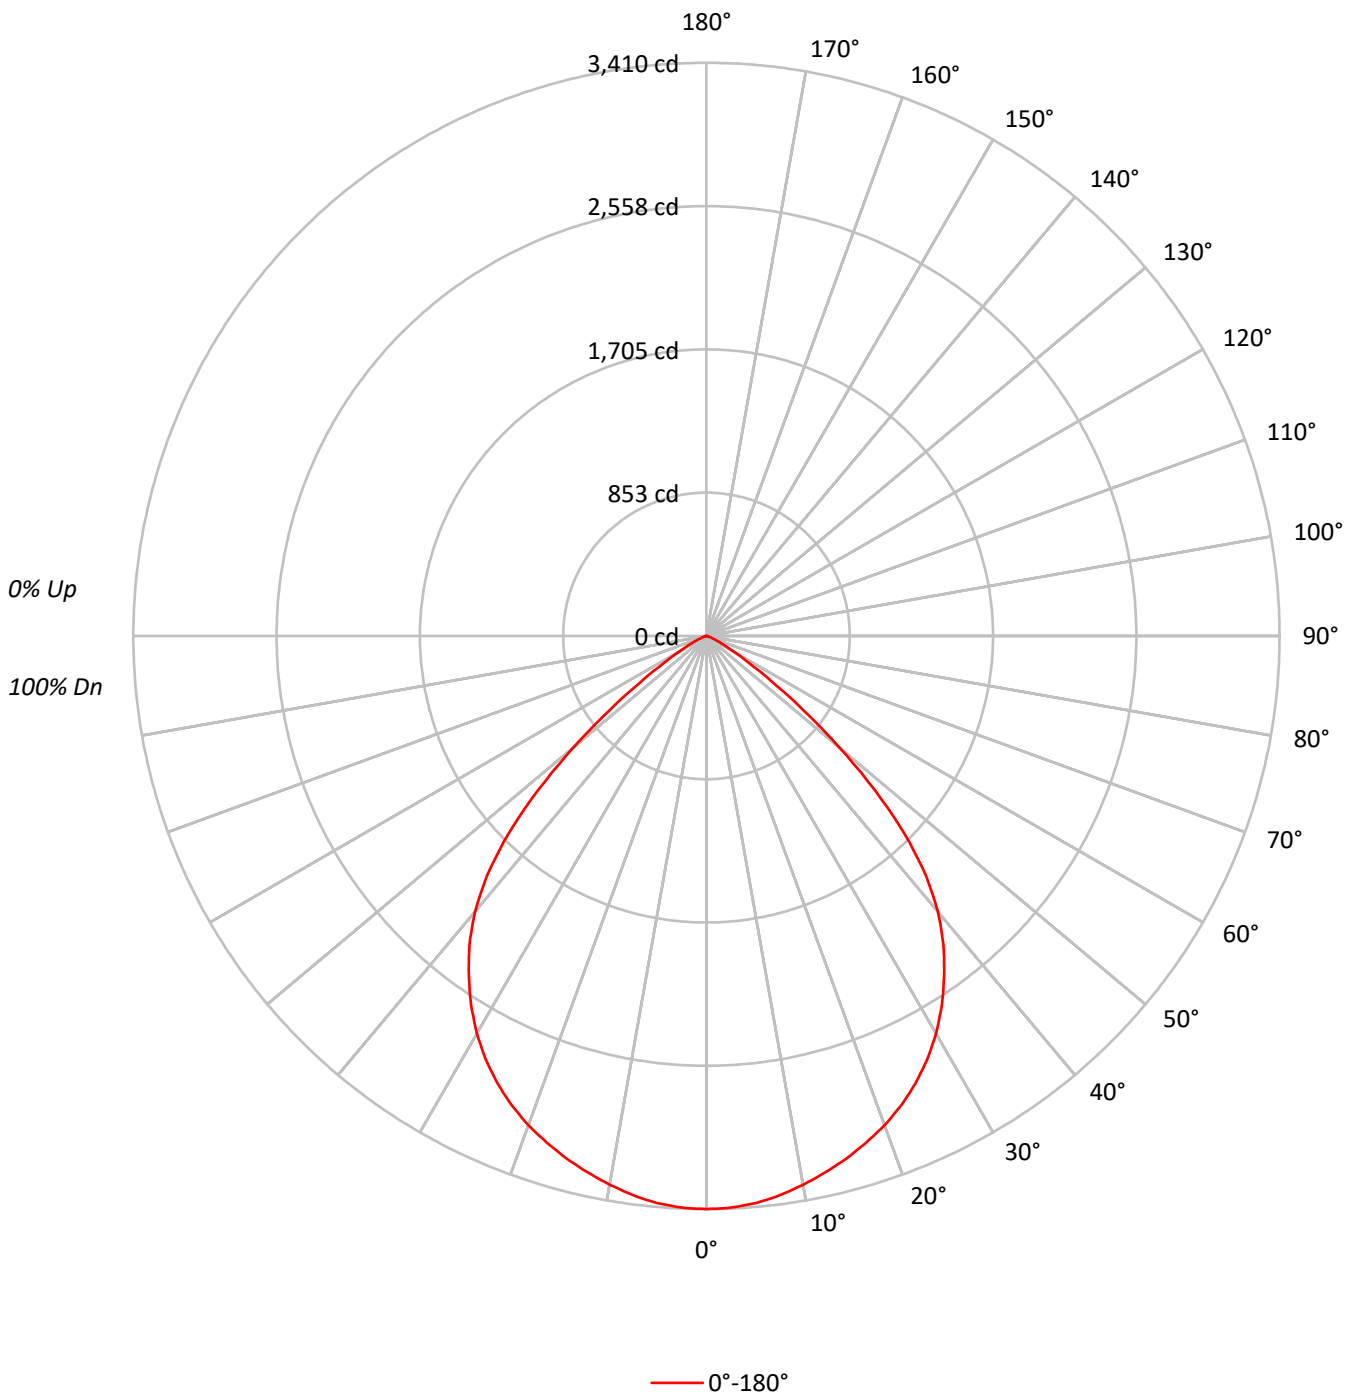



TEST NUMBER: P251286

CATALOG NUMBER: LSR8B60D010 EC8B60830 8LBS0GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	90	84	79	96	88	83	78	86	81	77		83	79	76		81	77	74	73
4	91	82	75	70	89	81	74	69	78	73	69		76	72	68		74	70	67	65
5	85	75	68	62	83	74	67	62	72	66	61		70	65	61		68	64	60	58
6	79	69	61	56	78	68	61	56	66	60	55		64	59	55		63	58	54	53
7	74	63	56	50	73	62	55	50	61	55	50		59	54	50		58	53	49	48
8	70	58	51	46	68	57	50	46	56	50	45		55	49	45		54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	41		51	45	41		50	45	41	40
10	62	50	43	38	60	49	43	38	48	42	38		48	42	38		47	42	38	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	105155
5°	104838
10°	103802
15°	102738
20°	101662
25°	99997
30°	97263
35°	92831
40°	86313
45°	72875
50°	49479
55°	25849
60°	11601
65°	5655
70°	2272
75°	1382
80°	1030
85°	672



TEST NUMBER: P251286

CATALOG NUMBER: LSR8B60D010 EC8B60830 8LBS0GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	321.0	5.4
10°-20°	907.7	15.3
20°-30°	1351.3	22.7
30°-40°	1536.1	25.9
40°-50°	1256.0	21.1
50°-60°	468.2	7.9
60°-70°	85.6	1.4
70°-80°	13.3	0.2
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2580.0	43.4
0°-40°	4116.0	69.3
0°-60°	5840.3	98.3
0°-90°	5941.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5941.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3410	
5°	3387	321
15°	3218	908
25°	2939	1351
35°	2466	1536
45°	1671	1256
55°	481	468
65°	78	86
75°	12	13
85°	2	2
90°	0	



TEST NUMBER: P251286

CATALOG NUMBER: LSR8B60D010 EC8B60830 8LBS0GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3410.1
2.5°	3404.3
5°	3386.9
7.5°	3355.8
10°	3315.1
12.5°	3268.6
15°	3218.2
17.5°	3160.0
20°	3098.0
22.5°	3024.3
25°	2939.0
27.5°	2842.1
30°	2731.6
32.5°	2605.6
35°	2466.0
37.5°	2316.7
40°	2144.2
42.5°	1930.9
45°	1671.1
47.5°	1359.0
50°	1031.4
52.5°	727.0
55°	480.8
57.5°	302.4
60°	188.1
62.5°	120.2
65°	77.5
67.5°	44.6
70°	25.2
72.5°	15.5
75°	11.6
77.5°	7.8
80°	5.8
82.5°	1.9
85°	1.9
87.5°	0.0
90°	0.0

(END OF REPORT)