

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251400

Luminaire Tested: **LSR8B60D010 EC8B60840 8LBS0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251400
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-17)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B60D010 EC8B60840 8LBS0B
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 4000 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5647.0 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.25
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251400

CATALOG NUMBER: LSR8B60D010 EC8B60840 8LBS0B

Luminous Intensity Polar Plot

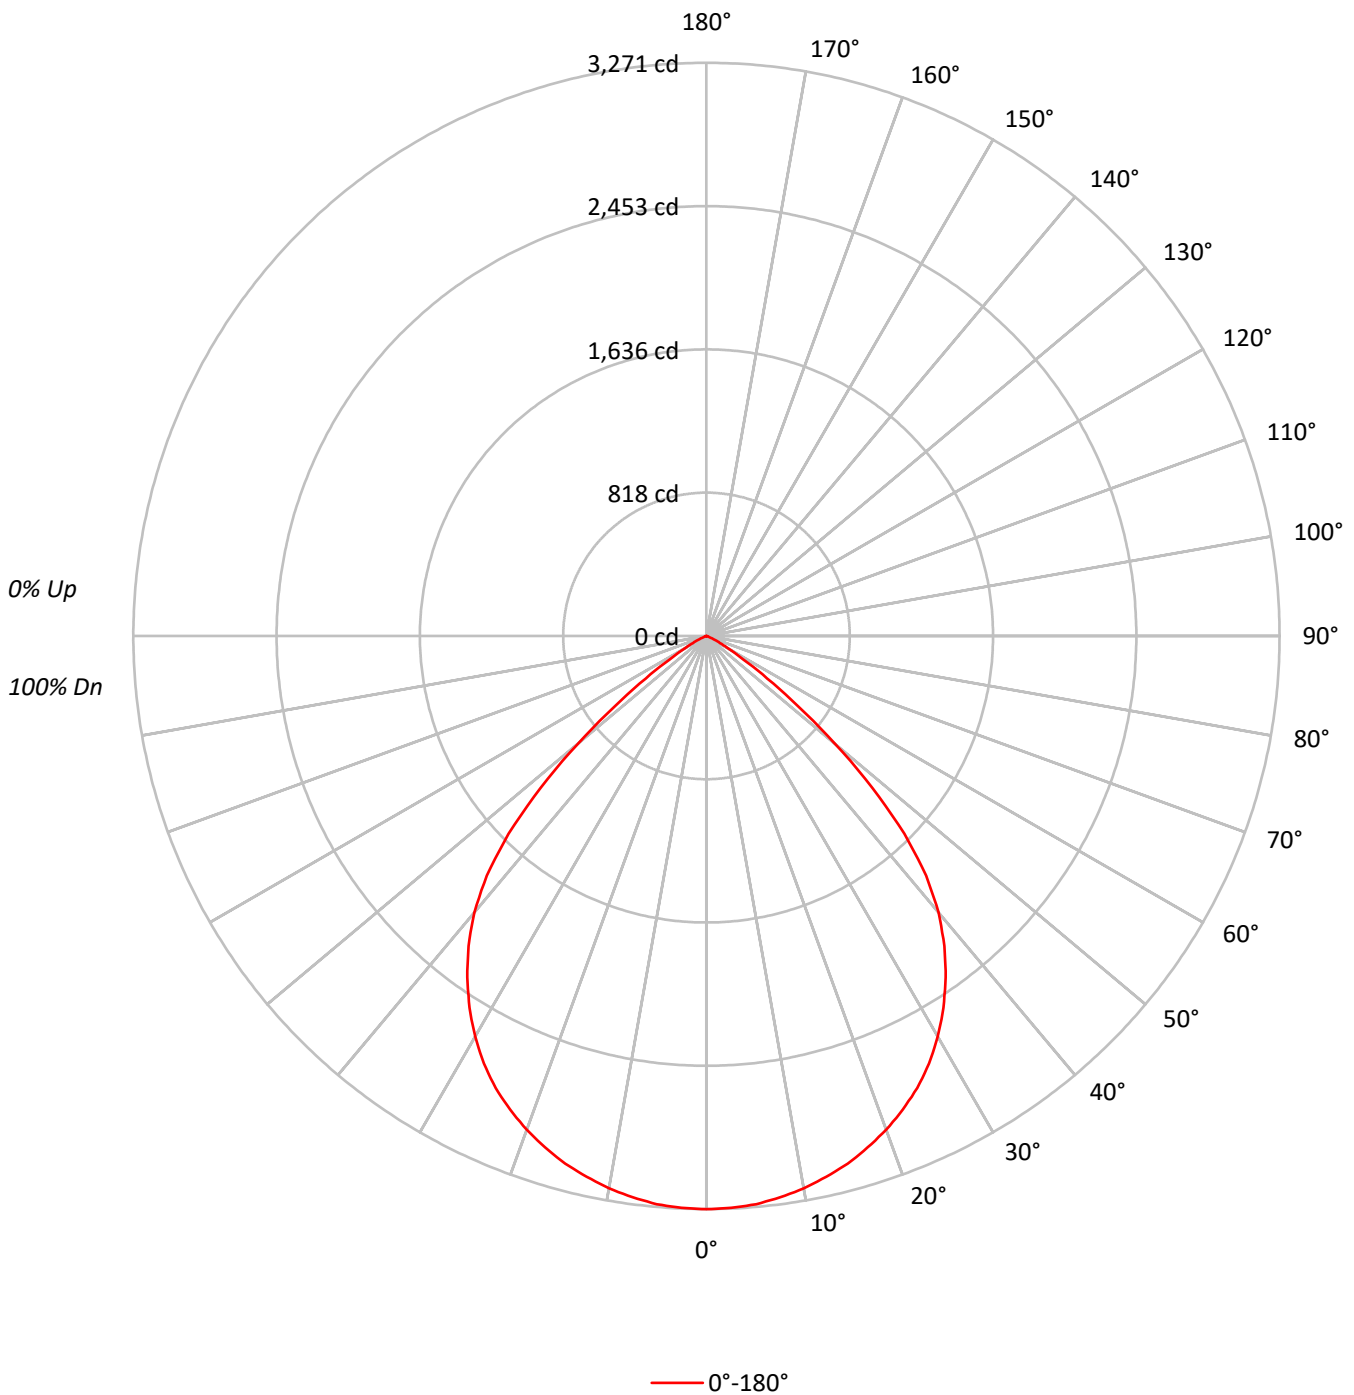



TEST NUMBER: P251400

CATALOG NUMBER: LSR8B60D010 EC8B60840 8LBS0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99		99	97	96		96	94	93	91
2	105	99	94	90	103	98	93	89	94	90	87		91	88	85		88	86	84	82
3	98	90	84	79	96	89	83	79	86	81	77		84	80	76		81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69		77	72	68		75	71	67	66
5	86	75	68	63	84	74	68	63	72	66	62		71	65	61		69	64	61	59
6	80	69	62	56	78	68	61	56	67	60	56		65	60	55		64	59	55	53
7	75	63	56	51	73	63	56	51	61	55	51		60	54	50		59	54	50	48
8	70	59	51	46	69	58	51	46	57	50	46		56	50	46		54	49	46	44
9	66	54	47	42	65	54	47	42	53	46	42		52	46	42		51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	39		48	42	38		47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	100875
5°	100765
10°	100236
15°	99507
20°	98410
25°	96853
30°	94012
35°	89589
40°	82975
45°	69626
50°	46035
55°	22725
60°	9017
65°	3510
70°	541
75°	0
80°	0
85°	0



TEST NUMBER: P251400

CATALOG NUMBER: LSR8B60D010 EC8B60840 8LBS0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	308.9	5.5
10°-20°	878.6	15.6
20°-30°	1307.8	23.2
30°-40°	1481.2	26.2
40°-50°	1197.5	21.2
50°-60°	415.4	7.4
60°-70°	56.8	1.0
70°-80°	0.8	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2495.3	44.2
0°-40°	3976.6	70.4
0°-60°	5589.5	99.0
0°-90°	5647.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5647.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3271	
5°	3255	309
15°	3117	879
25°	2847	1308
35°	2380	1481
45°	1597	1198
55°	423	415
65°	48	57
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P251400

CATALOG NUMBER: LSR8B60D010 EC8B60840 8LBS0B

CANDELA DISTRIBUTION (FULL):

	0°
0°	3271.3
2.5°	3267.3
5°	3255.3
7.5°	3231.2
10°	3201.2
12.5°	3161.1
15°	3117.0
17.5°	3061.0
20°	2998.9
22.5°	2926.7
25°	2846.6
27.5°	2750.5
30°	2640.3
32.5°	2516.1
35°	2379.9
37.5°	2229.6
40°	2061.3
42.5°	1855.0
45°	1596.6
47.5°	1284.1
50°	959.6
52.5°	657.1
55°	422.7
57.5°	250.4
60°	146.2
62.5°	86.1
65°	48.1
67.5°	22.0
70°	6.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)