

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250992

Luminaire Tested: **LSR8B60D010 EC8B60850 8LBS0H**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250992
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B60D010 EC8B60850 8LBS0H
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 5000 CCT WITH SEMI-SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6925.0 lumens
Efficiency: N/A
Efficacy: 116.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250992

CATALOG NUMBER: LSR8B60D010 EC8B60850 8LBS0H

Luminous Intensity Polar Plot

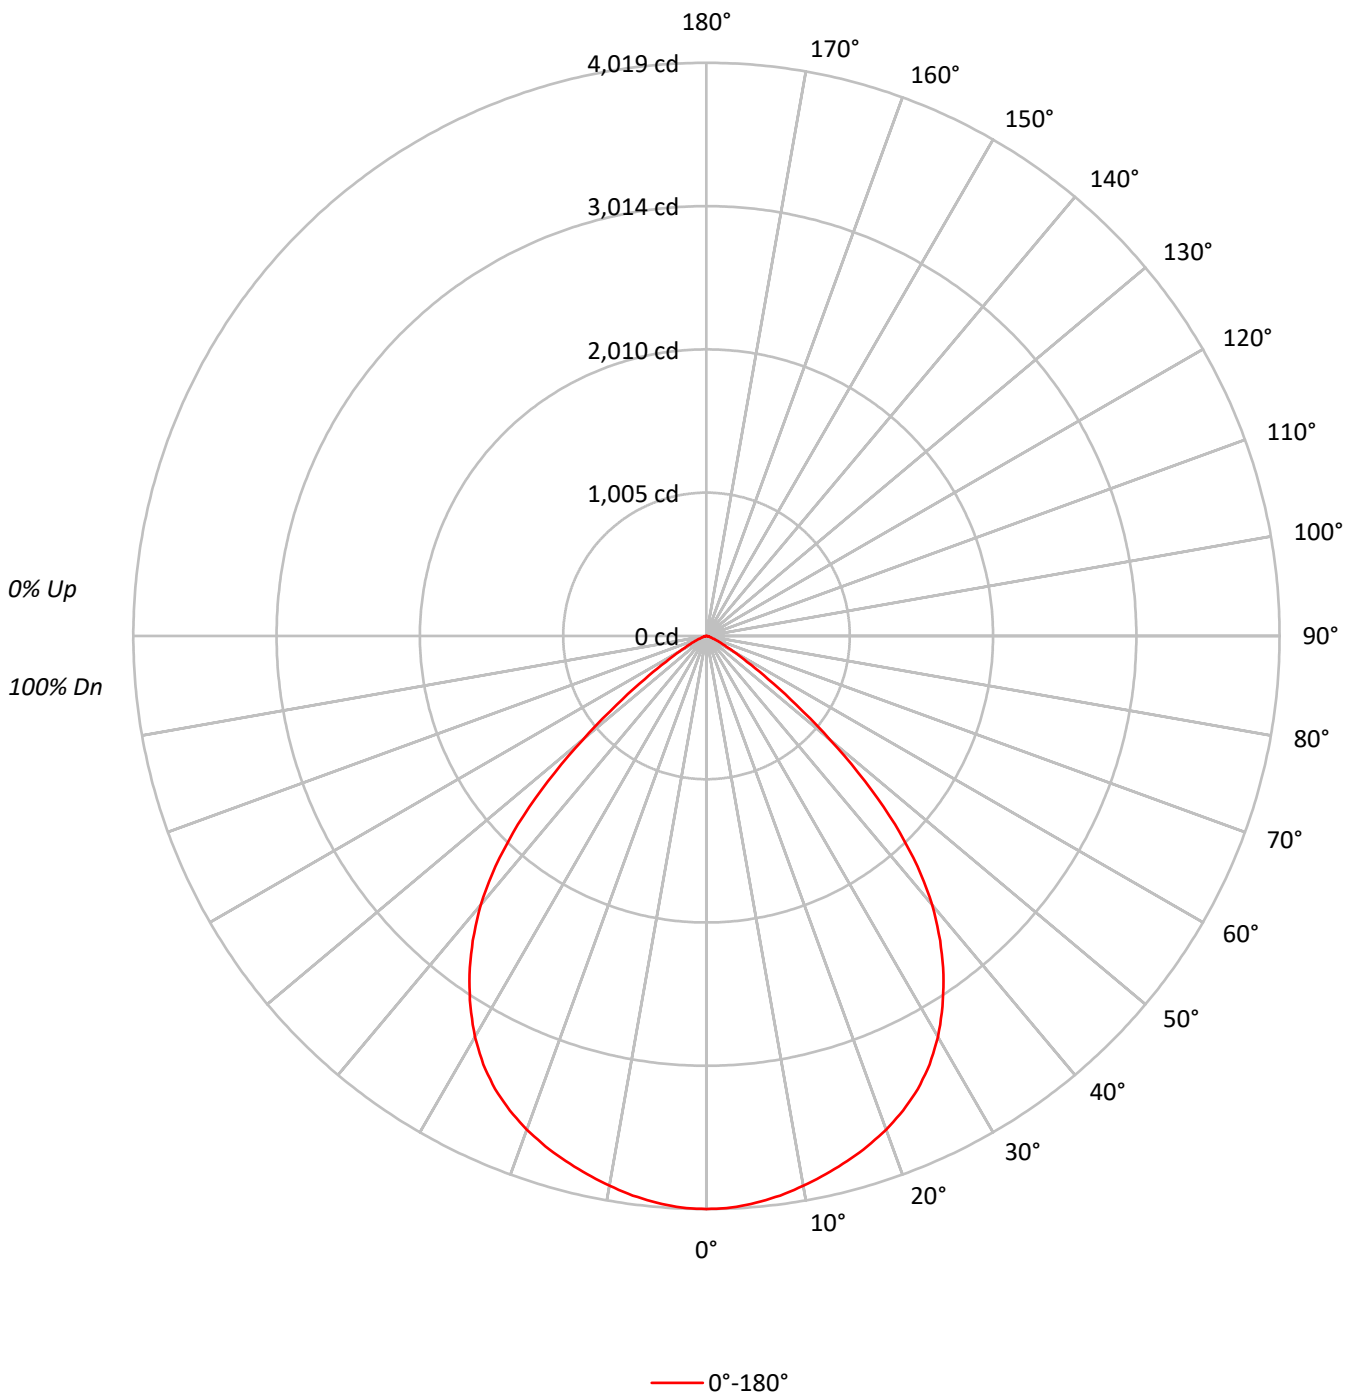



TEST NUMBER: P250992

CATALOG NUMBER: LSR8B60D010 EC8B60850 8LBS0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69	76	72	68	74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62	70	65	61	69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56	65	59	55	63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46	55	50	46	54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42	51	46	42	51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	123925
5°	123513
10°	122574
15°	121711
20°	120888
25°	119295
30°	115611
35°	109082
40°	99133
45°	81571
50°	54368
55°	28327
60°	13352
65°	7005
70°	3498
75°	2431
80°	1811
85°	1451



TEST NUMBER: P250992

CATALOG NUMBER: LSR8B60D010 EC8B60850 8LBS0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	378.5	5.5
10°-20°	1076.1	15.5
20°-30°	1609.7	23.2
30°-40°	1800.5	26.0
40°-50°	1412.5	20.4
50°-60°	515.4	7.4
60°-70°	105.1	1.5
70°-80°	22.6	0.3
80°-90°	4.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3064.3	44.2
0°-40°	4864.7	70.2
0°-60°	6792.6	98.1
0°-90°	6925.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6925.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4019	
5°	3990	378
15°	3812	1076
25°	3506	1610
35°	2898	1800
45°	1870	1412
55°	527	515
65°	96	105
75°	20	23
85°	4	5
90°	0	



TEST NUMBER: P250992

CATALOG NUMBER: LSR8B60D010 EC8B60850 8LBS0H

CANDELA DISTRIBUTION (FULL):

	0°
0°	4018.8
2.5°	4012.6
5°	3990.2
7.5°	3957.5
10°	3914.6
12.5°	3865.6
15°	3812.5
17.5°	3753.3
20°	3683.9
22.5°	3602.2
25°	3506.2
27.5°	3387.8
30°	3246.9
32.5°	3081.5
35°	2897.7
37.5°	2691.4
40°	2462.7
42.5°	2191.1
45°	1870.5
47.5°	1509.1
50°	1133.3
52.5°	794.4
55°	526.9
57.5°	336.9
60°	216.5
62.5°	142.9
65°	96.0
67.5°	61.3
70°	38.8
72.5°	26.5
75°	20.4
77.5°	14.3
80°	10.2
82.5°	6.1
85°	4.1
87.5°	2.0
90°	0.0

(END OF REPORT)