

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251004

Luminaire Tested: **LSR8B60D010 EC8B60927 8LBS0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P251004  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B60D010 EC8B60927 8LBS0H  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5356.1 lumens  
Efficiency: N/A  
Efficacy: 90.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 59.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P251004

CATALOG NUMBER: LSR8B60D010 EC8B60927 8LBS0H

### Luminous Intensity Polar Plot

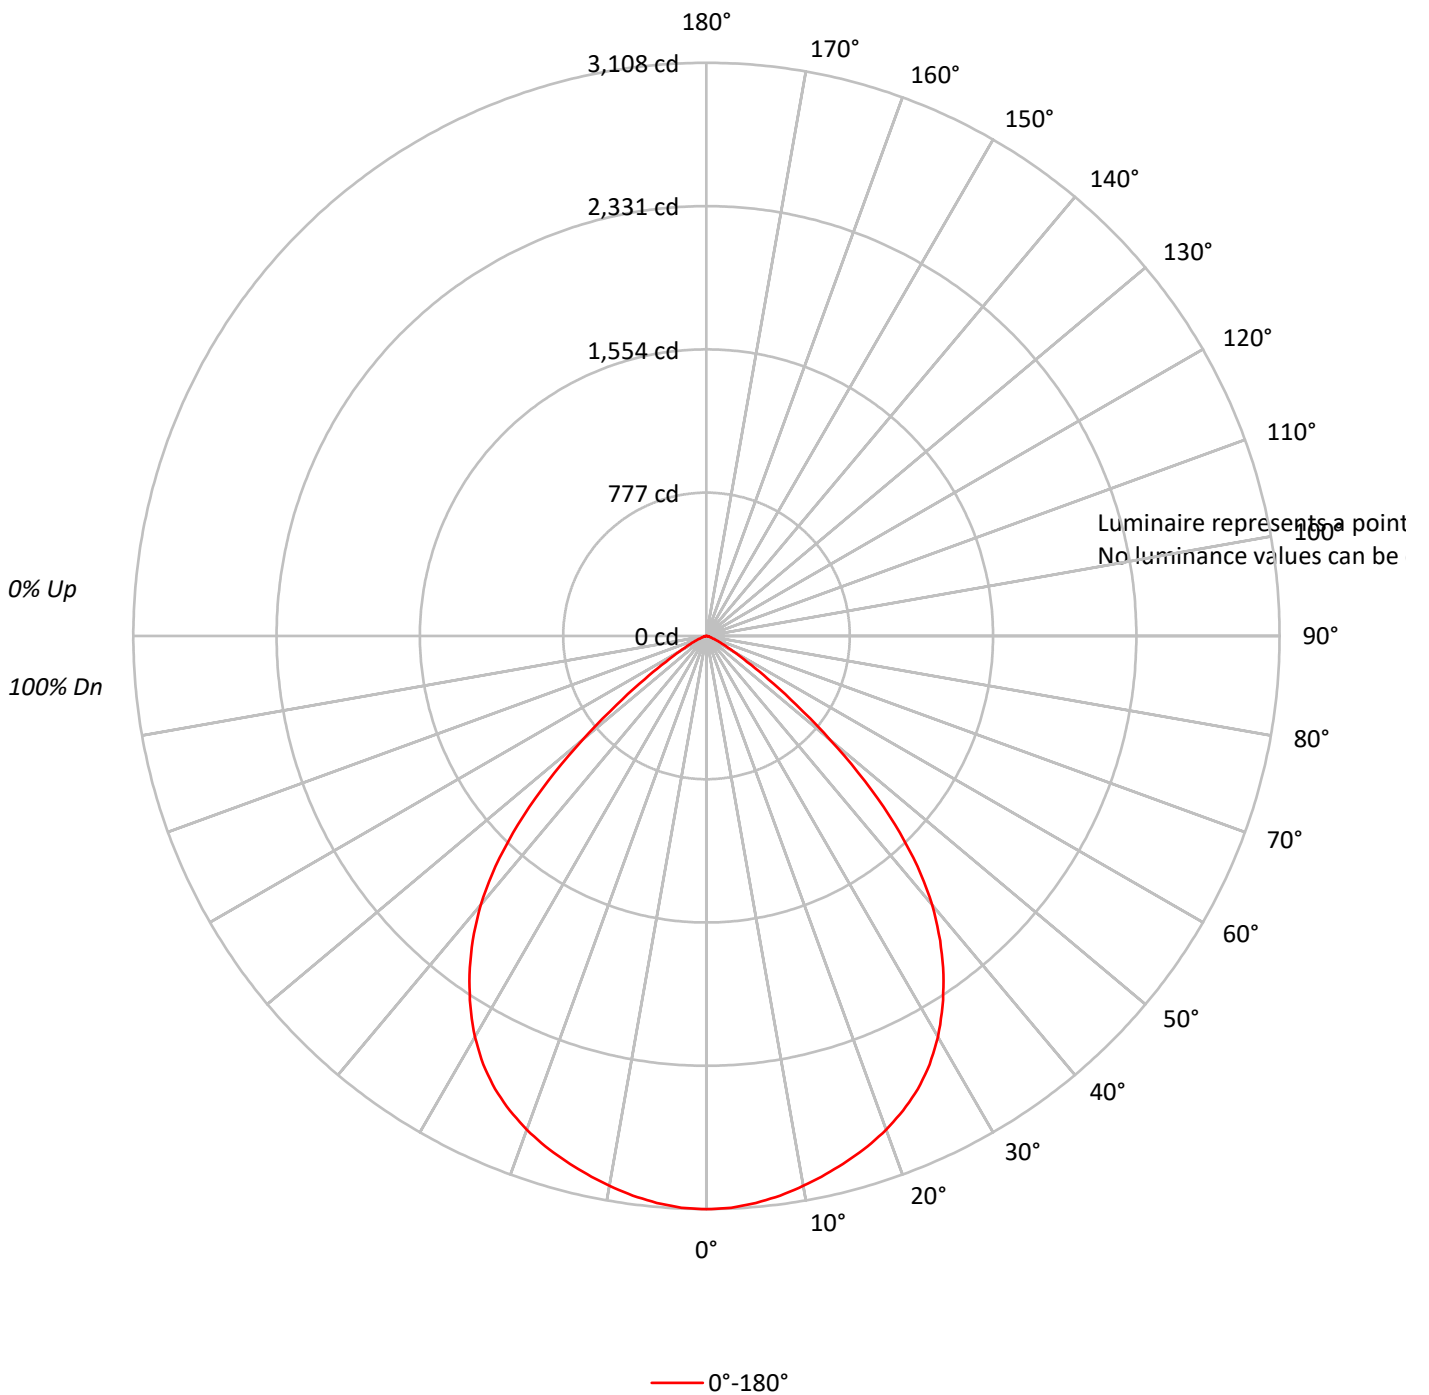



TEST NUMBER: P251004

CATALOG NUMBER: LSR8B60D010 EC8B60927 8LBS0H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77		83	79	76		81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69		76	72	68		74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62		70	65	61		69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56		65	59	55		63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50		60	54	50		59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46		55	50	46		54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42		51	46	42		51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P251004

CATALOG NUMBER: LSR8B60D010 EC8B60927 8LBS0H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	292.7	5.5
10°-20°	832.3	15.5
20°-30°	1245.0	23.2
30°-40°	1392.6	26.0
40°-50°	1092.5	20.4
50°-60°	398.6	7.4
60°-70°	81.3	1.5
70°-80°	17.5	0.3
80°-90°	3.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2370.0	44.2
0°-40°	3762.6	70.2
0°-60°	5253.7	98.1
0°-90°	5356.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5356.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3108	
5°	3086	293
15°	2949	832
25°	2712	1245
35°	2241	1393
45°	1447	1092
55°	408	399
65°	74	81
75°	16	17
85°	3	4
90°	0	



TEST NUMBER: P251004

CATALOG NUMBER: LSR8B60D010 EC8B60927 8LBS0H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3108.3
2.5°	3103.5
5°	3086.2
7.5°	3060.9
10°	3027.7
12.5°	2989.8
15°	2948.7
17.5°	2903.0
20°	2849.3
22.5°	2786.1
25°	2711.9
27.5°	2620.2
30°	2511.3
32.5°	2383.3
35°	2241.2
37.5°	2081.7
40°	1904.7
42.5°	1694.7
45°	1446.8
47.5°	1167.2
50°	876.6
52.5°	614.4
55°	407.5
57.5°	260.6
60°	167.4
62.5°	110.6
65°	74.2
67.5°	47.4
70°	30.0
72.5°	20.6
75°	15.8
77.5°	11.0
80°	7.9
82.5°	4.7
85°	3.2
87.5°	1.6
90°	0.0

(END OF REPORT)