

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251028

Luminaire Tested: **LSR8B60D010 EC8B60927 8LBW0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251028
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B60D010 EC8B60927 8LBW0WMH
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 2700 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4752.0 lumens
Efficiency: N/A
Efficacy: 79.9 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251028

CATALOG NUMBER: LSR8B60D010 EC8B60927 8LBW0WMH

Luminous Intensity Polar Plot

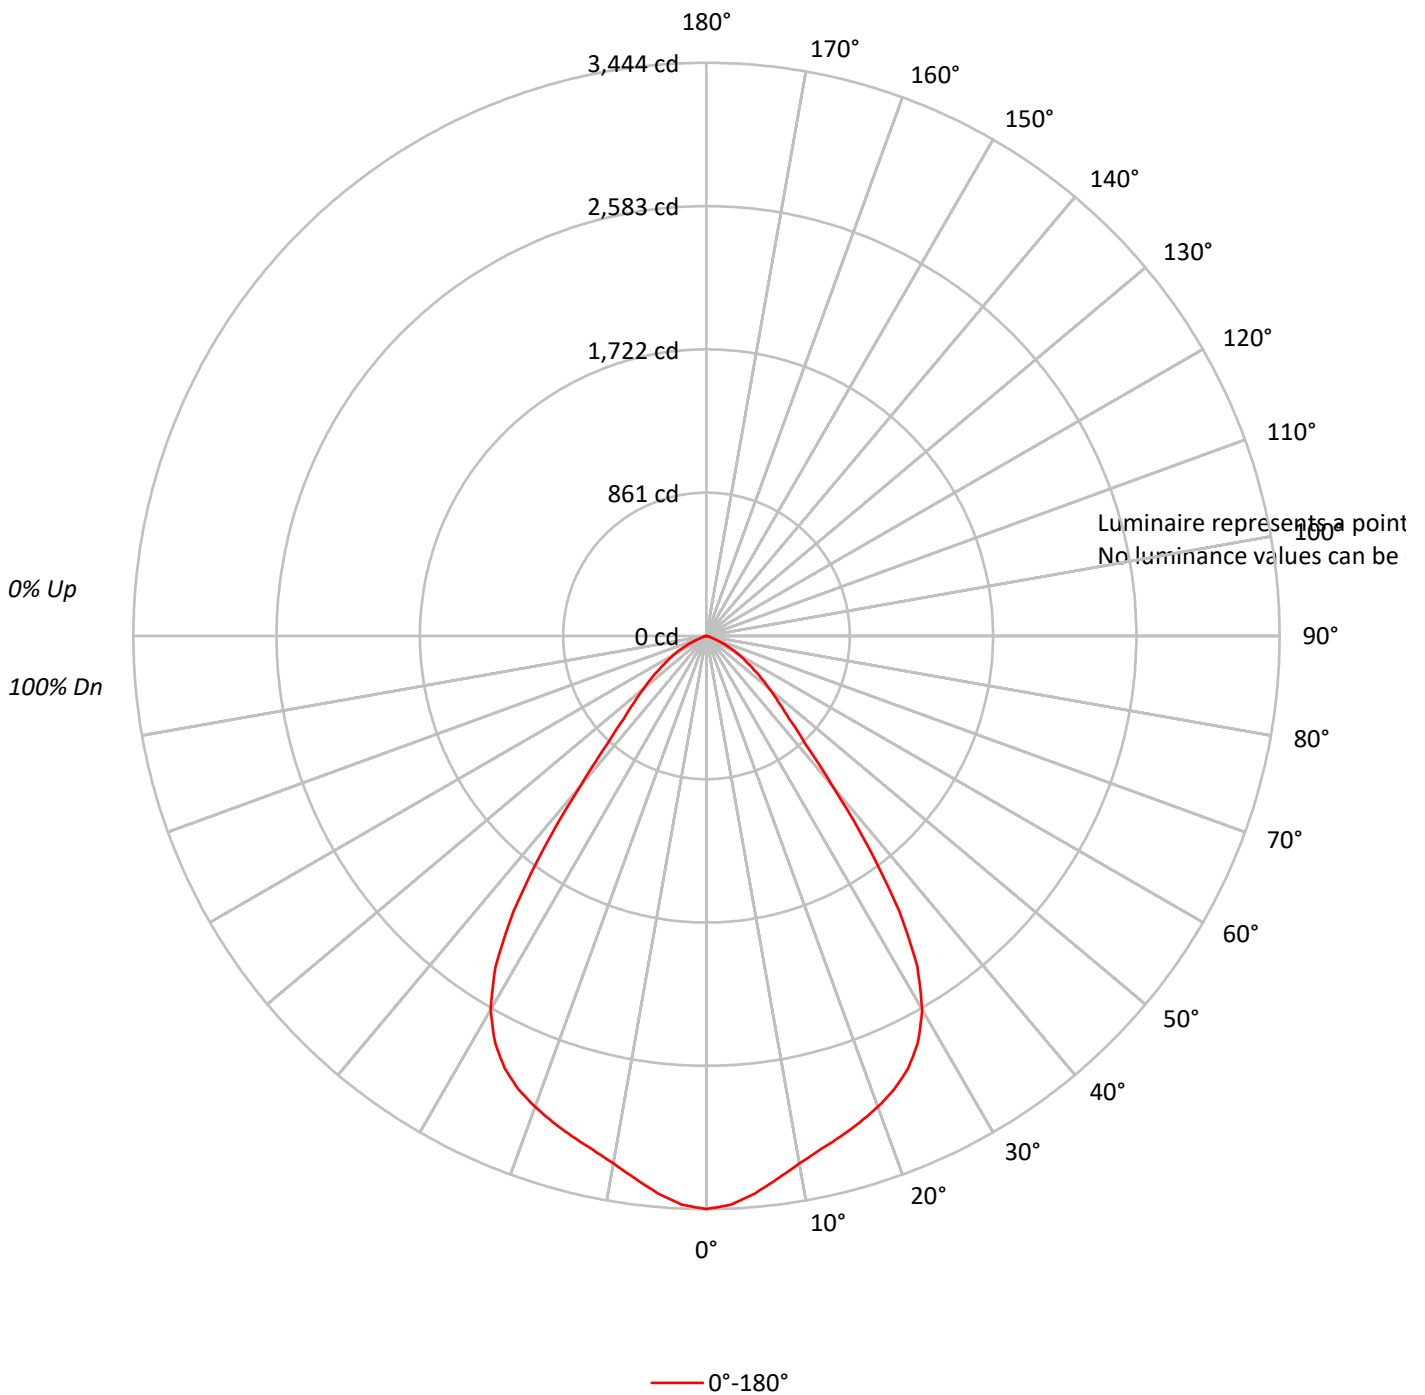



TEST NUMBER: P251028

CATALOG NUMBER: LSR8B60D010 EC8B60927 8LBW0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89	87	84	83
3	99	91	86	81	97	90	85	80	87	83	79		85	81	78		82	79	76	75
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	73	69	68
5	87	77	70	65	85	76	70	65	74	69	64		73	68	64		71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59		67	62	58		66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61	57	53	51
8	72	61	54	50	71	61	54	50	60	54	49		58	53	49		57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46		55	49	45		54	49	45	44
10	65	54	47	42	63	53	47	42	52	46	42		51	46	42		51	46	42	41

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P251028

CATALOG NUMBER: LSR8B60D010 EC8B60927 8LBW0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	316.2	6.7
10°-20°	879.7	18.5
20°-30°	1310.3	27.6
30°-40°	1216.9	25.6
40°-50°	574.8	12.1
50°-60°	308.8	6.5
60°-70°	124.0	2.6
70°-80°	19.5	0.4
80°-90°	1.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2506.2	52.7
0°-40°	3723.0	78.3
0°-60°	4606.6	96.9
0°-90°	4752.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4752.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3444	
5°	3362	316
15°	3114	880
25°	2868	1310
35°	2023	1217
45°	701	575
55°	340	309
65°	123	124
75°	16	19
85°	2	2
90°	0	



TEST NUMBER: P251028

CATALOG NUMBER: LSR8B60D010 EC8B60927 8LBW0WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3443.8
2.5°	3420.1
5°	3361.7
7.5°	3287.5
10°	3218.1
12.5°	3161.1
15°	3113.8
17.5°	3064.8
20°	3011.2
22.5°	2949.5
25°	2867.5
27.5°	2752.2
30°	2592.7
32.5°	2359.0
35°	2022.8
37.5°	1593.2
40°	1181.1
42.5°	879.5
45°	701.1
47.5°	585.8
50°	494.2
52.5°	412.1
55°	339.5
57.5°	276.3
60°	224.2
62.5°	175.3
65°	123.2
67.5°	72.7
70°	42.6
72.5°	25.3
75°	15.8
77.5°	9.5
80°	4.7
82.5°	3.2
85°	1.6
87.5°	0.0
90°	0.0

(END OF REPORT)