

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250886

Luminaire Tested: **LSR8B60D010 EC8B60930 8LBSOLI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250886
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-12)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B60D010 EC8B60930 8LBS0LI
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5805.7 lumens
Efficiency: N/A
Efficacy: 97.6 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.24
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250886

CATALOG NUMBER: LSR8B60D010 EC8B60930 8LBSOLI

Luminous Intensity Polar Plot

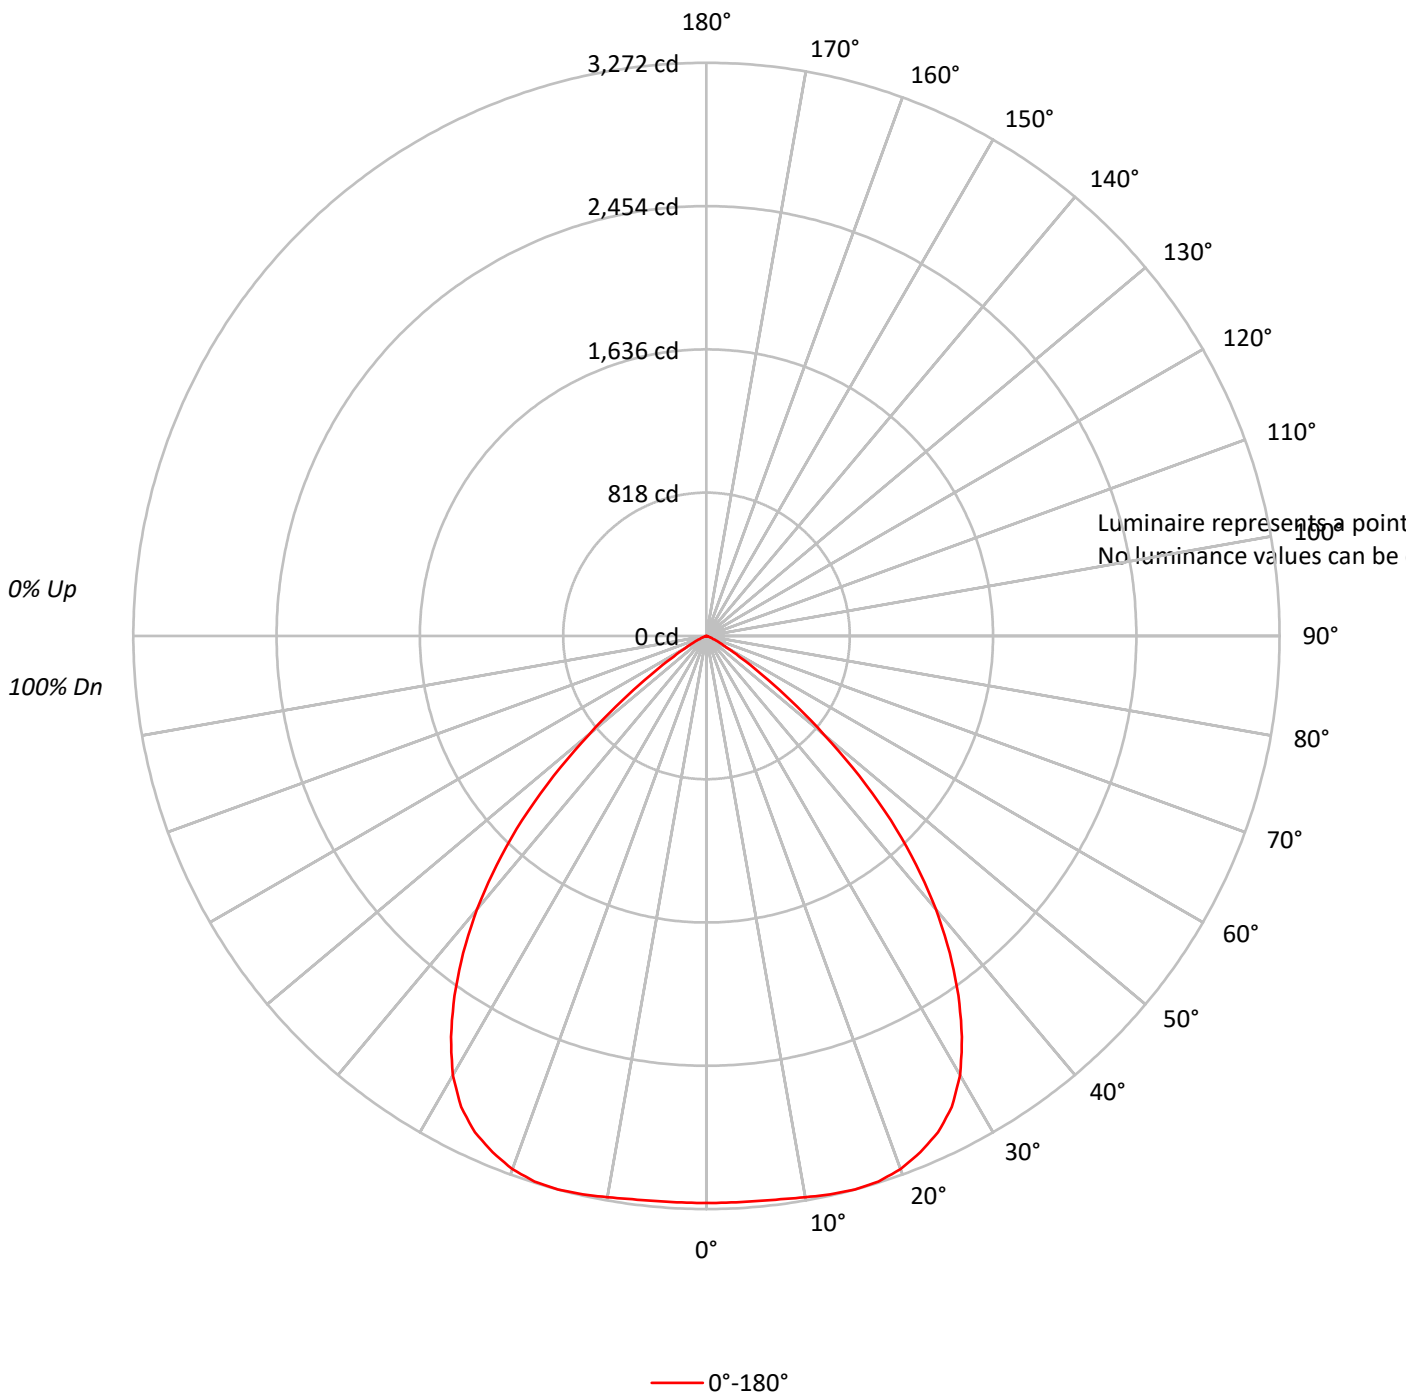



TEST NUMBER: P250886

CATALOG NUMBER: LSR8B60D010 EC8B60930 8LBSOLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	99	95	91	103	98	93	90	94	91	88	91	88	86	88	86	84	82
3	98	91	85	80	96	89	84	79	86	82	78	84	80	77	82	78	75	74
4	92	83	76	71	90	82	75	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	63	84	75	68	63	73	67	63	71	66	62	69	65	61	60
6	80	70	62	57	79	69	62	57	67	61	56	66	60	56	64	59	56	54
7	75	64	57	52	74	63	56	52	62	56	51	61	55	51	59	54	51	49
8	71	59	52	47	69	58	52	47	57	51	47	56	51	46	55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	42	41
10	62	51	44	39	61	50	44	39	50	43	39	49	43	39	48	43	39	37

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P250886

CATALOG NUMBER: LSR8B60D010 EC8B60930 8LBS0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	309.6	5.3
10°-20°	924.6	15.9
20°-30°	1432.3	24.7
30°-40°	1555.5	26.8
40°-50°	1130.3	19.5
50°-60°	384.2	6.6
60°-70°	61.1	1.1
70°-80°	6.6	0.1
80°-90°	1.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2666.5	45.9
0°-40°	4222.1	72.7
0°-60°	5736.6	98.8
0°-90°	5805.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5805.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3237	
5°	3239	310
15°	3272	925
25°	3127	1432
35°	2508	1556
45°	1489	1130
55°	391	384
65°	53	61
75°	5	7
85°	2	1
90°	0	



TEST NUMBER: P250886

CATALOG NUMBER: LSR8B60D010 EC8B60930 8LBSOLI

CANDELA DISTRIBUTION (FULL):

0°	
0°	3237.0
2.5°	3237.0
5°	3238.7
7.5°	3243.6
10°	3253.6
12.5°	3265.2
15°	3272.0
17.5°	3265.2
20°	3238.7
22.5°	3190.4
25°	3127.0
27.5°	3032.2
30°	2895.7
32.5°	2714.2
35°	2507.7
37.5°	2282.9
40°	2038.1
42.5°	1773.3
45°	1488.6
47.5°	1182.2
50°	877.5
52.5°	601.1
55°	391.3
57.5°	238.1
60°	143.2
62.5°	88.2
65°	53.2
67.5°	29.9
70°	13.3
72.5°	8.3
75°	5.0
77.5°	3.4
80°	3.4
82.5°	1.7
85°	1.7
87.5°	0.0
90°	0.0

(END OF REPORT)