

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251190

Luminaire Tested: **LSR8B60D010 EC8B60940 8LBS0WH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251190
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-15)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B60D010 EC8B60940 8LBS0WH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 4000 CCT WITH WHEAT TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6205.0 lumens
Efficiency: N/A
Efficacy: 104.3 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.27 / 1.23
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251190

CATALOG NUMBER: LSR8B60D010 EC8B60940 8LBS0WH

Luminous Intensity Polar Plot

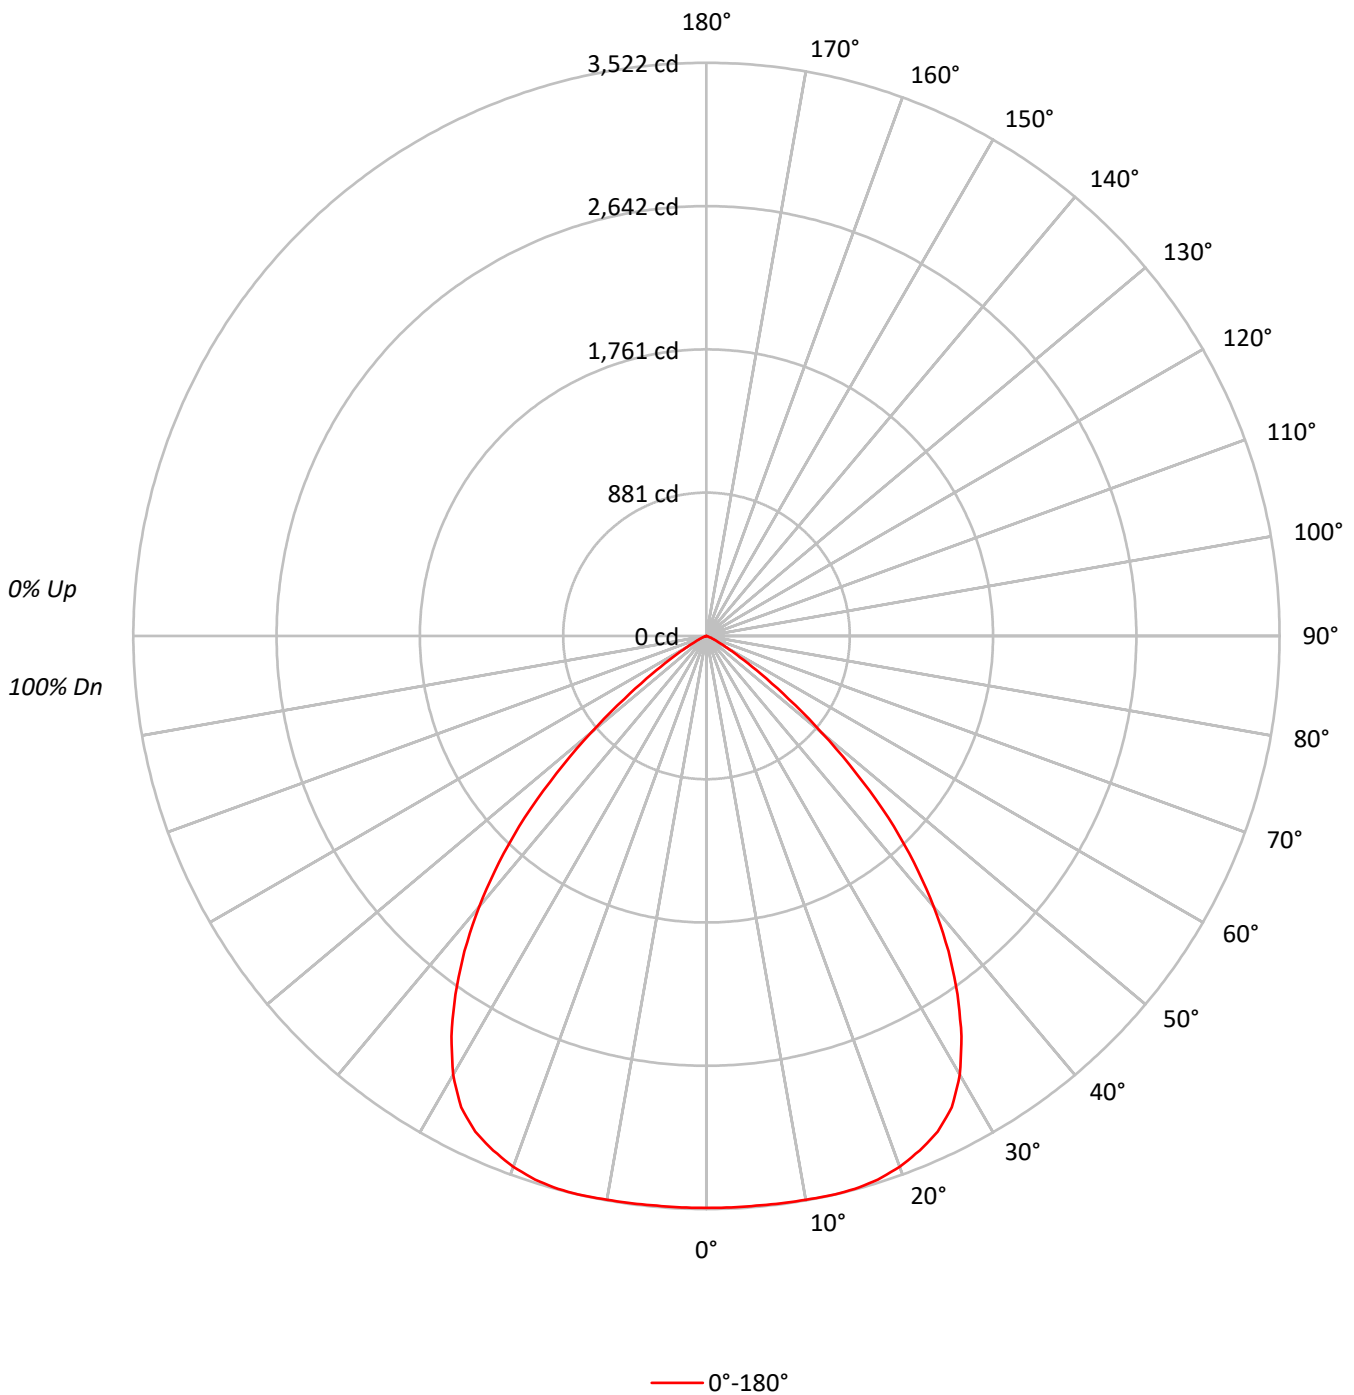



TEST NUMBER: P251190

CATALOG NUMBER: LSR8B60D010 EC8B60940 8LBS0WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	100	95	91	103	98	93	90	94	91	88	91	88	86	89	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	92	83	76	71	90	82	76	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	70	65	62	60
6	80	70	63	57	79	69	62	57	67	61	57	66	60	56	64	60	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	59	52	47	69	59	52	47	57	51	47	56	51	47	55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41
10	63	51	44	40	61	51	44	40	50	44	39	49	43	39	48	43	39	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	108377
5°	108791
10°	110162
15°	112315
20°	113918
25°	114386
30°	110883
35°	101206
40°	87544
45°	68920
50°	44456
55°	21822
60°	8973
65°	3933
70°	1136
75°	429
80°	320
85°	0



TEST NUMBER: P251190

CATALOG NUMBER: LSR8B60D010 EC8B60940 8LBS0WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	335.6	5.4
10°-20°	994.3	16.0
20°-30°	1539.4	24.8
30°-40°	1667.6	26.9
40°-50°	1200.0	19.3
50°-60°	401.5	6.5
60°-70°	60.7	1.0
70°-80°	5.2	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2869.2	46.2
0°-40°	4536.9	73.1
0°-60°	6138.4	98.9
0°-90°	6205.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6205.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3515	
5°	3515	336
15°	3518	994
25°	3362	1539
35°	2688	1668
45°	1580	1200
55°	406	402
65°	54	61
75°	4	5
85°	0	1
90°	0	



TEST NUMBER: P251190

CATALOG NUMBER: LSR8B60D010 EC8B60940 8LBS0WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3514.6
2.5°	3514.6
5°	3514.6
7.5°	3516.4
10°	3518.2
12.5°	3521.8
15°	3518.2
17.5°	3503.8
20°	3471.5
22.5°	3423.0
25°	3361.9
27.5°	3265.0
30°	3114.1
32.5°	2916.6
35°	2688.5
37.5°	2442.4
40°	2174.8
42.5°	1887.5
45°	1580.4
47.5°	1248.2
50°	926.7
52.5°	635.8
55°	405.9
57.5°	242.4
60°	145.5
62.5°	88.0
65°	53.9
67.5°	26.9
70°	12.6
72.5°	5.4
75°	3.6
77.5°	3.6
80°	1.8
82.5°	1.8
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)