

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250985

Luminaire Tested: **LSR8B70D010 EC8B70827 8LBS0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P250985  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B70D010 EC8B70827 8LBS0H  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7743.0 lumens  
Efficiency: N/A  
Efficacy: 102.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 75.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P250985

CATALOG NUMBER: LSR8B70D010 EC8B70827 8LBS0H

### Luminous Intensity Polar Plot

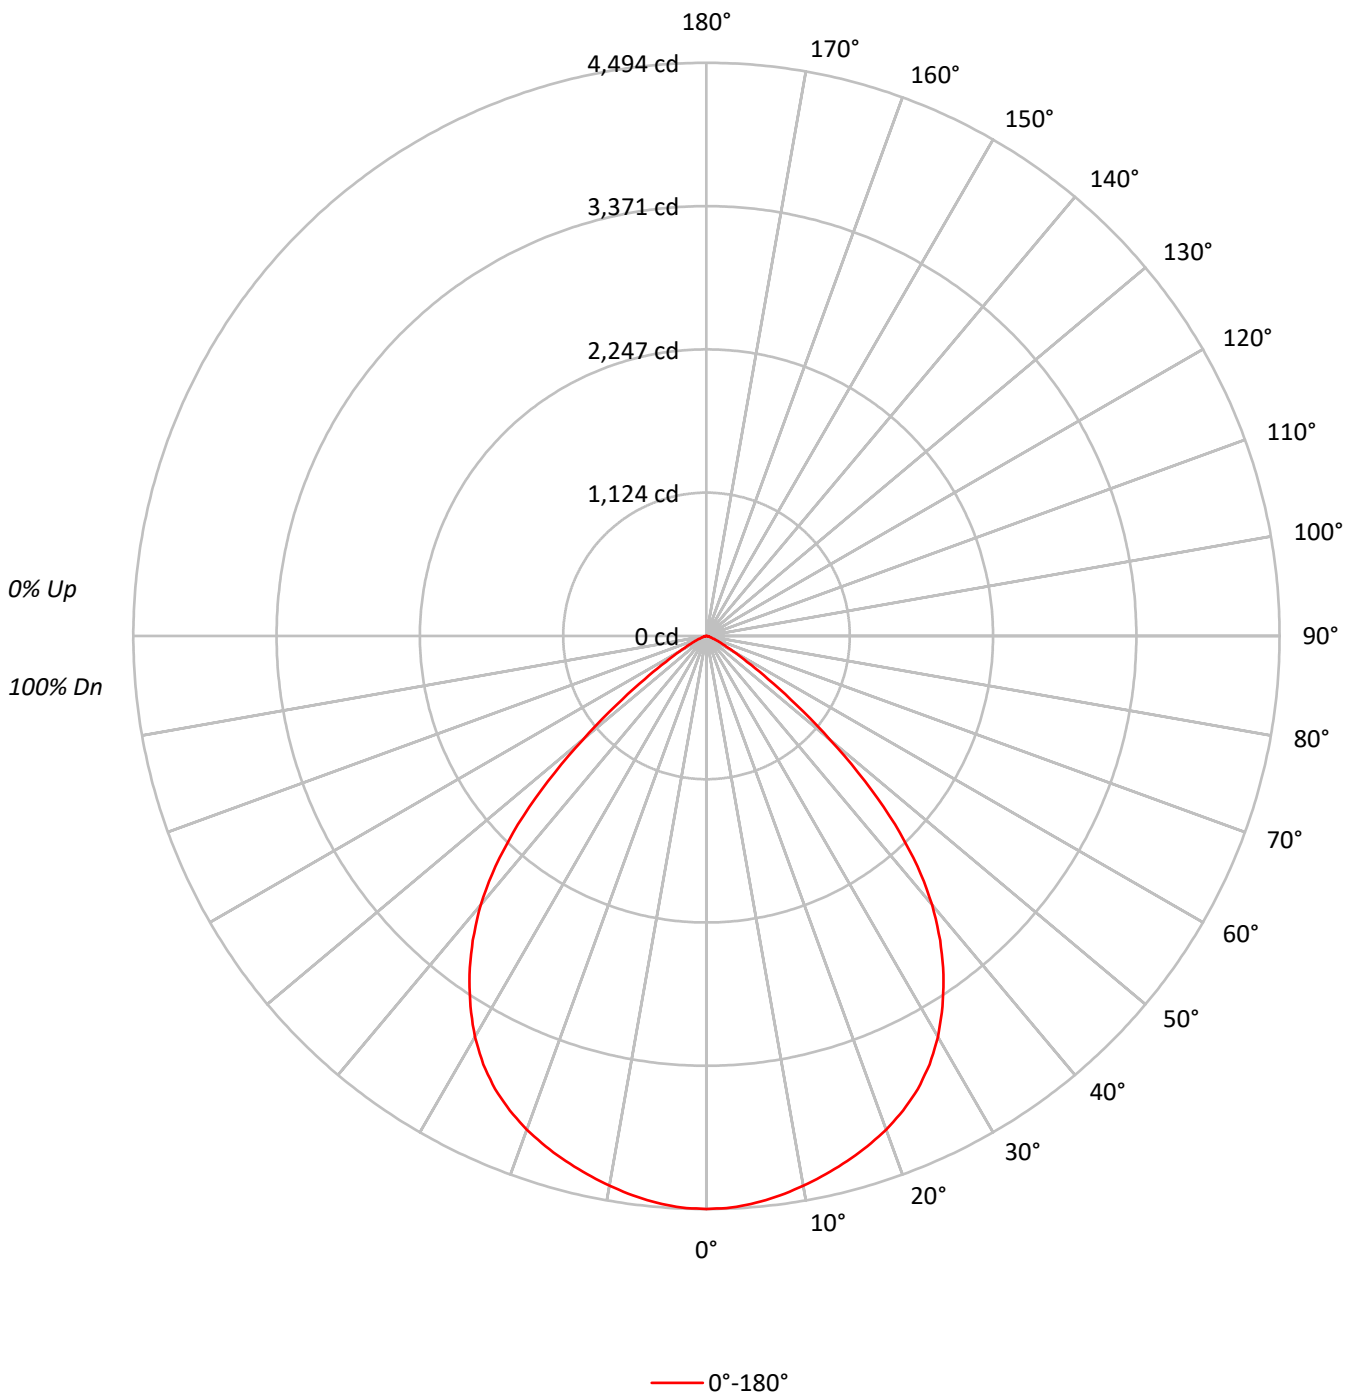



TEST NUMBER: P250985

CATALOG NUMBER: LSR8B70D010 EC8B70827 8LBS0H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77		83	79	76		81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69		76	72	68		74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62		70	65	61		69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56		65	59	55		63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50		60	54	50		59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46		55	50	46		54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42		51	46	42		51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	138563
5°	138102
10°	137053
15°	136089
20°	135166
25°	133388
30°	129267
35°	121967
40°	110843
45°	91209
50°	60791
55°	31671
60°	14925
65°	7829
70°	3913
75°	2716
80°	2024
85°	1628



TEST NUMBER: P250985

CATALOG NUMBER: LSR8B70D010 EC8B70827 8LBS0H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	423.2	5.5
10°-20°	1203.2	15.5
20°-30°	1799.8	23.2
30°-40°	2013.2	26.0
40°-50°	1579.3	20.4
50°-60°	576.3	7.4
60°-70°	117.5	1.5
70°-80°	25.2	0.3
80°-90°	5.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3426.2	44.2
0°-40°	5439.4	70.2
0°-60°	7595.0	98.1
0°-90°	7743.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7743.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4494	
5°	4462	423
15°	4263	1203
25°	3920	1800
35°	3240	2013
45°	2092	1579
55°	589	576
65°	107	117
75°	23	25
85°	5	5
90°	0	



TEST NUMBER: P250985

CATALOG NUMBER: LSR8B70D010 EC8B70827 8LBS0H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4493.5
2.5°	4486.6
5°	4461.5
7.5°	4425.0
10°	4377.0
12.5°	4322.2
15°	4262.9
17.5°	4196.6
20°	4119.0
22.5°	4027.7
25°	3920.4
27.5°	3787.9
30°	3630.4
32.5°	3445.5
35°	3240.0
37.5°	3009.3
40°	2753.6
42.5°	2449.9
45°	2091.5
47.5°	1687.3
50°	1267.2
52.5°	888.2
55°	589.1
57.5°	376.7
60°	242.0
62.5°	159.8
65°	107.3
67.5°	68.5
70°	43.4
72.5°	29.7
75°	22.8
77.5°	16.0
80°	11.4
82.5°	6.8
85°	4.6
87.5°	2.3
90°	0.0

(END OF REPORT)