

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251083

Luminaire Tested: **LSR8B70D010 EC8B70830 8LBS0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251083
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-14)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B70D010 EC8B70830 8LBS0WMH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3000 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7782.0 lumens
Efficiency: N/A
Efficacy: 102.5 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251083

CATALOG NUMBER: LSR8B70D010 EC8B70830 8LBS0WMH

Luminous Intensity Polar Plot

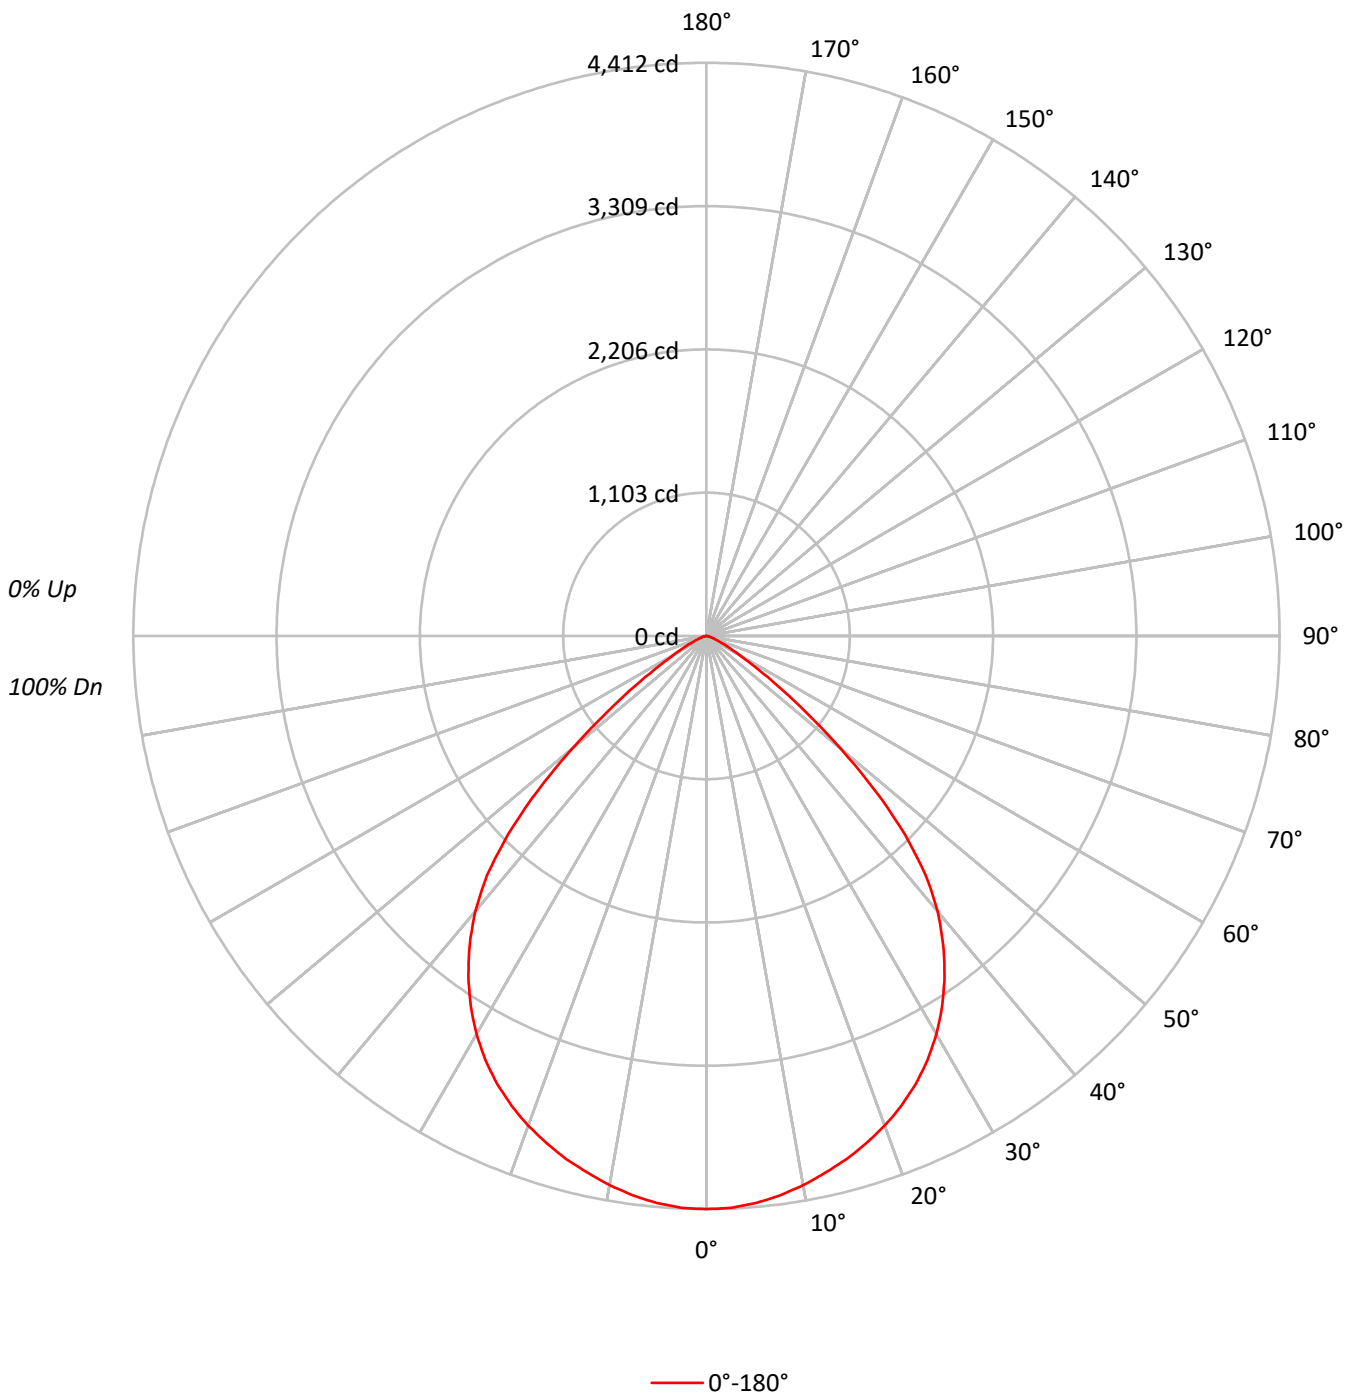



TEST NUMBER: P251083

CATALOG NUMBER: LSR8B70D010 EC8B70830 8LBS0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	89	102	97	92	88	94	90	86	90	87	85	88	85	83	81
3	98	90	83	78	95	88	82	78	85	80	76	83	79	75	80	77	74	72
4	91	82	75	69	89	80	74	69	78	72	68	76	71	67	74	70	66	65
5	85	74	67	62	83	73	67	61	71	65	61	70	64	60	68	63	60	58
6	79	68	61	55	77	67	60	55	66	59	55	64	58	54	63	58	54	52
7	74	63	55	50	72	62	55	50	60	54	49	59	53	49	58	53	49	47
8	69	58	50	45	68	57	50	45	56	49	45	55	49	45	54	48	45	43
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	45	41	39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	136059
5°	135635
10°	134419
15°	133085
20°	131655
25°	129577
30°	126019
35°	120277
40°	111467
45°	94117
50°	64567
55°	35612
60°	17904
65°	10076
70°	5491
75°	3908
80°	2486
85°	1663



TEST NUMBER: P251083

CATALOG NUMBER: LSR8B70D010 EC8B70830 8LBS0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	415.4	5.3
10°-20°	1175.7	15.1
20°-30°	1750.4	22.5
30°-40°	1988.4	25.6
40°-50°	1625.3	20.9
50°-60°	636.9	8.2
60°-70°	148.5	1.9
70°-80°	35.7	0.5
80°-90°	5.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3341.5	42.9
0°-40°	5329.9	68.5
0°-60°	7592.1	97.6
0°-90°	7782.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7782.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4412	
5°	4382	415
15°	4169	1176
25°	3808	1750
35°	3195	1988
45°	2158	1625
55°	662	637
65°	138	148
75°	33	36
85°	5	6
90°	0	



TEST NUMBER: P251083

CATALOG NUMBER: LSR8B70D010 EC8B70830 8LBS0WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	4412.3
2.5°	4405.3
5°	4381.8
7.5°	4342.1
10°	4292.9
12.5°	4232.0
15°	4168.8
17.5°	4093.9
20°	4012.0
22.5°	3916.0
25°	3808.4
27.5°	3682.0
30°	3539.2
32.5°	3377.7
35°	3195.1
37.5°	2993.8
40°	2769.1
42.5°	2497.6
45°	2158.2
47.5°	1760.2
50°	1345.9
52.5°	966.7
55°	662.4
57.5°	433.0
60°	290.3
62.5°	199.0
65°	138.1
67.5°	91.3
70°	60.9
72.5°	42.1
75°	32.8
77.5°	23.4
80°	14.0
82.5°	7.0
85°	4.7
87.5°	2.3
90°	0.0

(END OF REPORT)