

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251267

Luminaire Tested: **LSR8B70D010 EC8B70835 8LBM0GPH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P251267  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201629)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B70D010 EC8B70835 8LBM0GPH  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 3500 CCT WITH GRAPHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6628.0 lumens  
Efficiency: N/A  
Efficacy: 87.3 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 75.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P251267

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0GPH

### Luminous Intensity Polar Plot

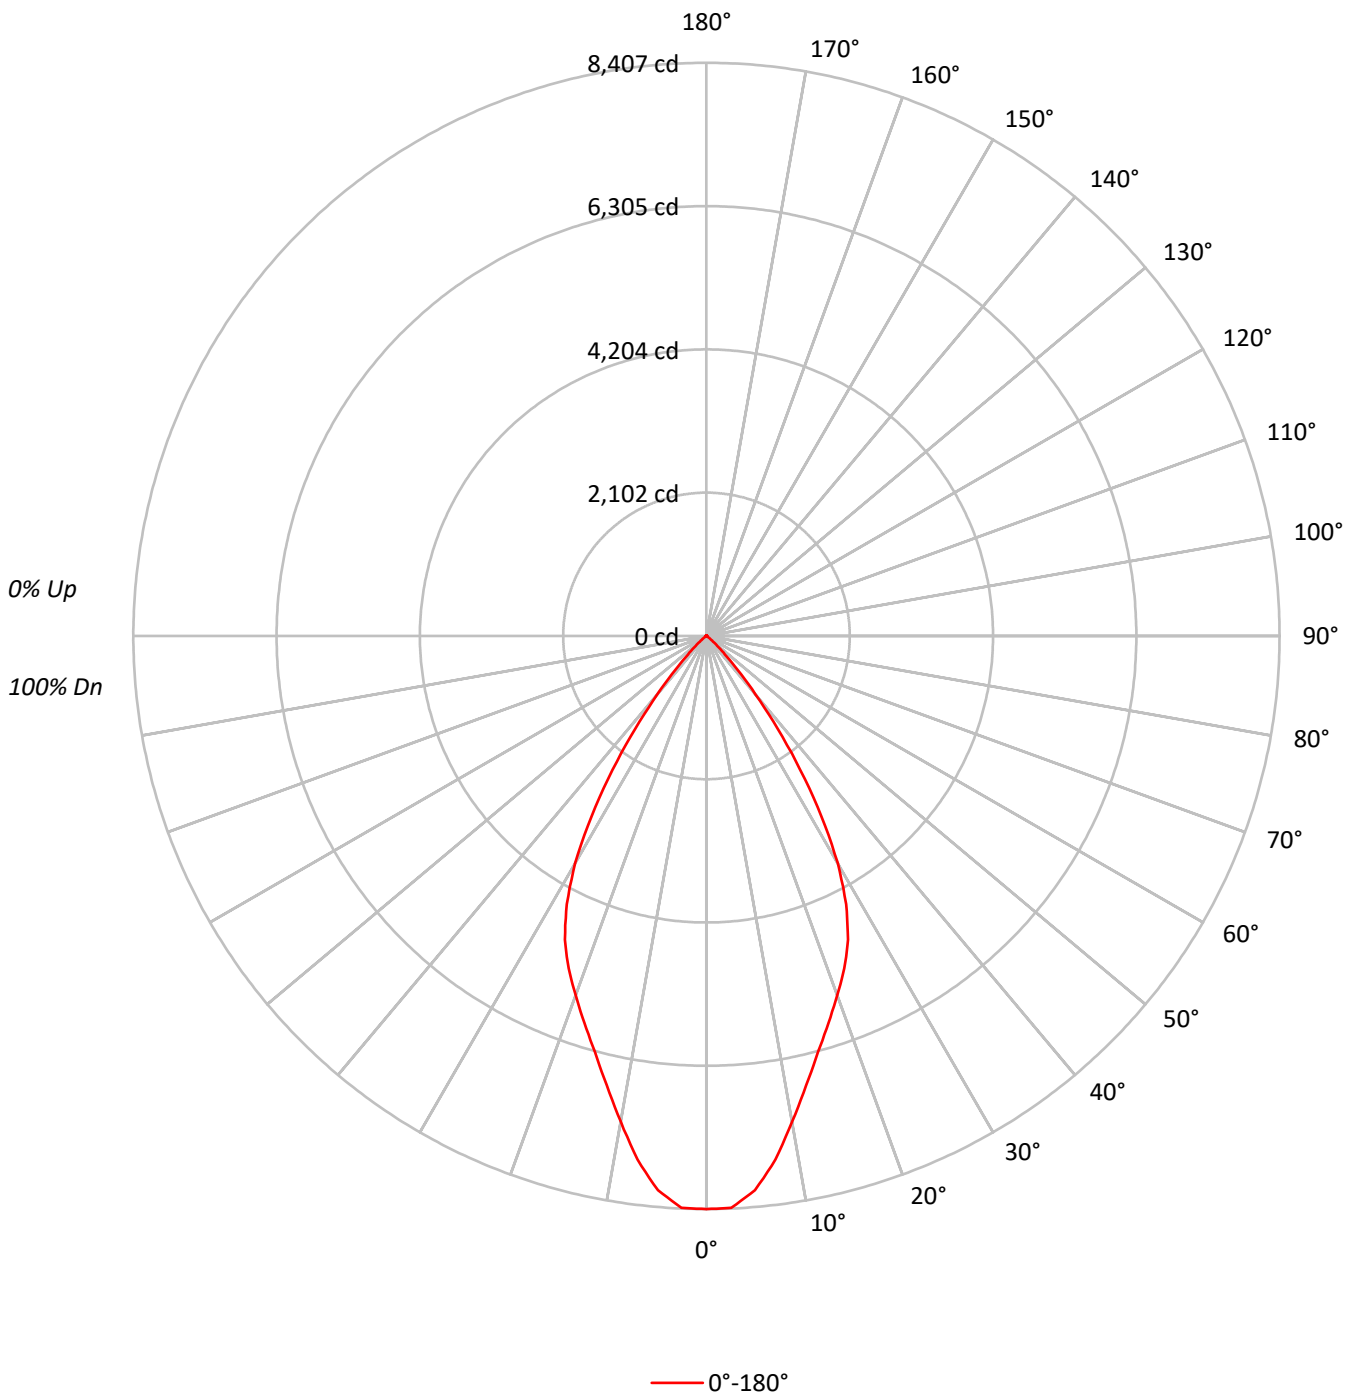



TEST NUMBER: P251267

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101	101	100	98	98	96	95	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	72	71
6	88	79	73	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66
7	84	75	69	65	82	74	68	64	73	68	64	72	67	64	70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	259253
5°	252675
10°	226561
15°	201741
20°	184078
25°	167167
30°	137093
35°	90271
40°	44984
45°	16728
50°	5090
55°	575
60°	345
65°	0
70°	243
75°	989
80°	0
85°	955



TEST NUMBER: P251267

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	748.5	11.3
10°-20°	1779.5	26.8
20°-30°	2216.6	33.4
30°-40°	1495.8	22.6
40°-50°	353.5	5.3
50°-60°	25.7	0.4
60°-70°	4.5	0.1
70°-80°	3.3	0.0
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4744.6	71.6
0°-40°	6240.4	94.2
0°-60°	6619.6	99.9
0°-90°	6628.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6628.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8407	
5°	8163	748
15°	6319	1780
25°	4913	2217
35°	2398	1496
45°	384	354
55°	11	26
65°	0	4
75°	8	3
85°	3	1
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P251267

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0GPH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	8407.4
2.5°	8394.1
5°	8162.9
7.5°	7746.7
10°	7235.6
12.5°	6748.9
15°	6319.4
17.5°	5949.2
20°	5609.5
22.5°	5280.5
25°	4913.2
27.5°	4434.8
30°	3850.2
32.5°	3143.3
35°	2398.0
37.5°	1716.0
40°	1117.5
42.5°	668.7
45°	383.6
47.5°	214.9
50°	106.1
52.5°	48.9
55°	10.7
57.5°	2.7
60°	5.6
62.5°	8.3
65°	0.0
67.5°	5.6
70°	2.7
72.5°	2.7
75°	8.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	2.7
87.5°	0.0
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P251267

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0GPH

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)