

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251061

Luminaire Tested: **LSR8B70D010 EC8B70835 8LBM0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251061
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201704)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B70D010 EC8B70835 8LBM0WMH
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3500 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7200.0 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.83
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251061

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0WMH

Luminous Intensity Polar Plot

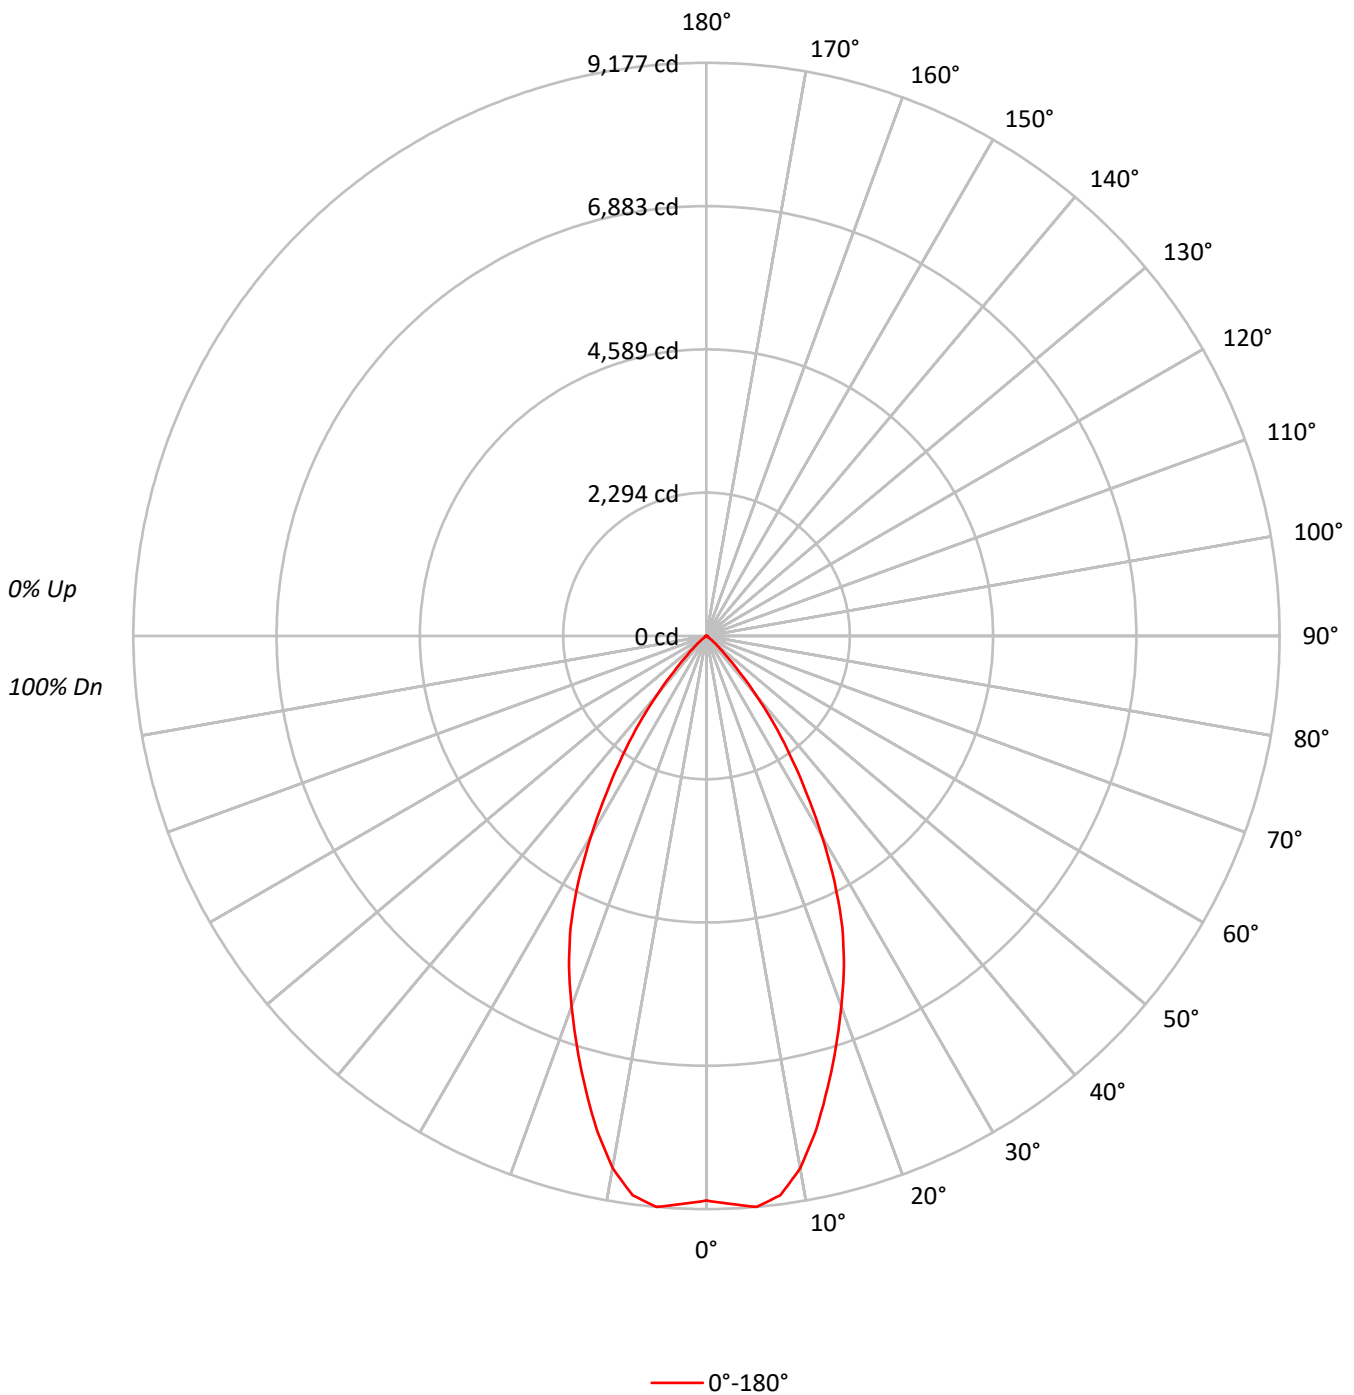



TEST NUMBER: P251061

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86		90	87	85		88	86	83	82
4	98	91	85	81	96	89	84	81	87	83	80		85	82	79		83	80	78	76
5	93	85	79	75	92	84	79	75	82	78	74		81	77	73		79	76	73	71
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75	71	68	67
7	84	75	69	65	83	75	69	65	73	68	65		72	68	64		71	67	64	63
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		67	63	60	59
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64	60	57	56
10	73	64	58	54	72	63	58	54	62	58	54		62	57	54		61	57	54	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	278714
5°	284063
10°	270836
15°	239147
20°	207239
25°	175112
30°	131595
35°	88114
40°	49343
45°	19820
50°	6865
55°	1903
60°	1079
65°	941
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P251061

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	858.6	11.9
10°-20°	2089.5	29.0
20°-30°	2318.6	32.2
30°-40°	1468.9	20.4
40°-50°	407.6	5.7
50°-60°	46.7	0.6
60°-70°	9.2	0.1
70°-80°	1.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5266.7	73.1
0°-40°	6735.6	93.6
0°-60°	7189.9	99.9
0°-90°	7200.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7200.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9038	
5°	9177	859
15°	7491	2089
25°	5147	2319
35°	2341	1469
45°	454	408
55°	35	47
65°	13	9
75°	0	1
85°	0	0
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P251061

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	9038.5
2.5°	9105.3
5°	9176.9
7.5°	9033.9
10°	8649.6
12.5°	8101.6
15°	7491.1
17.5°	6891.6
20°	6315.3
22.5°	5749.9
25°	5146.7
27.5°	4441.4
30°	3695.8
32.5°	2973.7
35°	2340.7
37.5°	1768.8
40°	1225.8
42.5°	762.3
45°	454.5
47.5°	261.4
50°	143.1
52.5°	70.1
55°	35.4
57.5°	26.6
60°	17.5
62.5°	9.2
65°	12.9
67.5°	6.4
70°	0.0
72.5°	1.8
75°	0.0
77.5°	1.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P251061

CATALOG NUMBER: LSR8B70D010 EC8B70835 8LBM0WMH

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)