

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251403

Luminaire Tested: **LSR8B70D010 EC8B70850 8LBS0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251403
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-17)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B70D010 EC8B70850 8LBS0B
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 5000 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6950.0 lumens
Efficiency: N/A
Efficacy: 91.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.25
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251403

CATALOG NUMBER: LSR8B70D010 EC8B70850 8LBS0B

Luminous Intensity Polar Plot

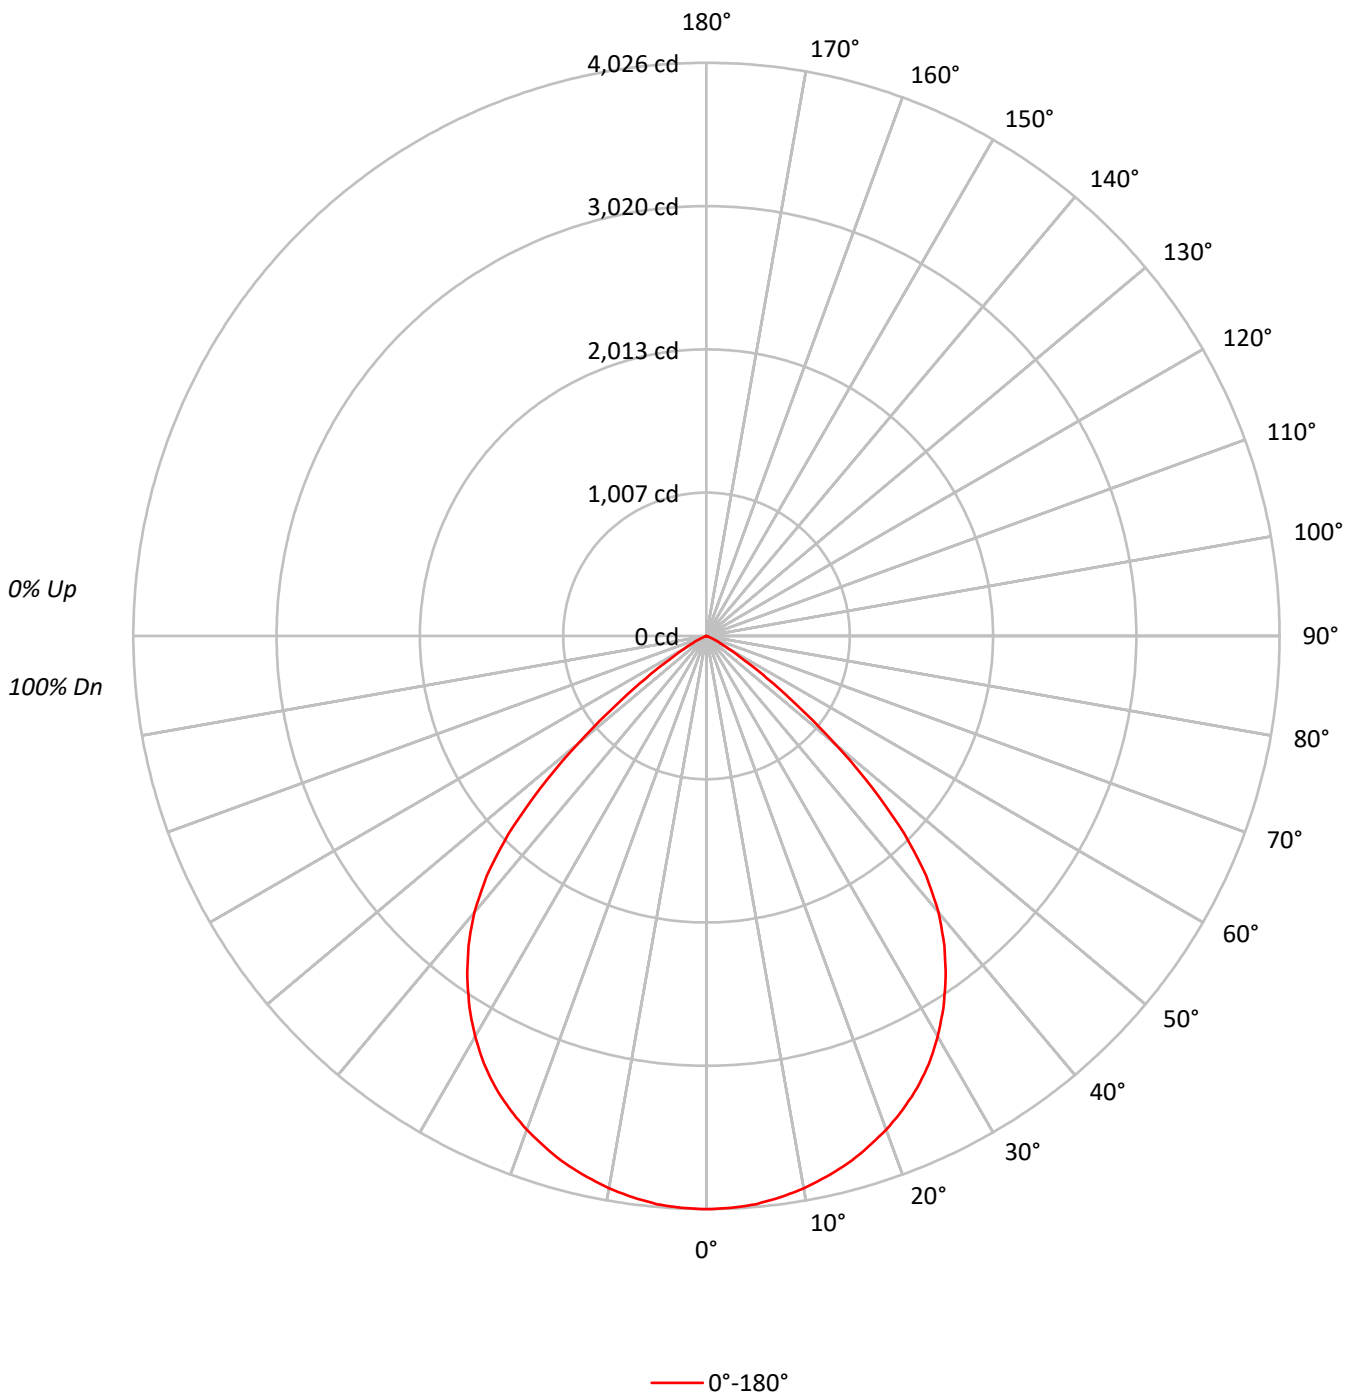



TEST NUMBER: P251403

CATALOG NUMBER: LSR8B70D010 EC8B70850 8LBS0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99		99	97	96		96	94	93	91
2	105	99	94	90	103	98	93	89	94	90	87		91	88	85		88	86	84	82
3	98	90	84	79	96	89	83	79	86	81	77		84	80	76		81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69		77	72	68		75	71	67	66
5	86	75	68	63	84	74	68	63	72	66	62		71	65	61		69	64	61	59
6	80	69	62	56	78	68	61	56	67	60	56		65	60	55		64	59	55	53
7	75	63	56	51	73	63	56	51	61	55	51		60	54	50		59	54	50	48
8	70	59	51	46	69	58	51	46	57	50	46		56	50	46		54	49	46	44
9	66	54	47	42	65	54	47	42	53	46	42		52	46	42		51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	39		48	42	38		47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	124150
5°	124015
10°	123363
15°	122470
20°	121115
25°	119200
30°	115704
35°	110260
40°	102124
45°	85692
50°	56656
55°	27967
60°	11101
65°	4320
70°	667
75°	0
80°	0
85°	0



TEST NUMBER: P251403

CATALOG NUMBER: LSR8B70D010 EC8B70850 8LBS0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	380.2	5.5
10°-20°	1081.3	15.6
20°-30°	1609.6	23.2
30°-40°	1823.0	26.2
40°-50°	1473.9	21.2
50°-60°	511.2	7.4
60°-70°	69.9	1.0
70°-80°	1.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3071.1	44.2
0°-40°	4894.1	70.4
0°-60°	6879.2	99.0
0°-90°	6950.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6950.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4026	
5°	4006	380
15°	3836	1081
25°	3503	1610
35°	2929	1823
45°	1965	1474
55°	520	511
65°	59	70
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P251403

CATALOG NUMBER: LSR8B70D010 EC8B70850 8LBS0B

CANDELA DISTRIBUTION (FULL):

	0°
0°	4026.1
2.5°	4021.2
5°	4006.4
7.5°	3976.8
10°	3939.8
12.5°	3890.5
15°	3836.3
17.5°	3767.2
20°	3690.8
22.5°	3602.1
25°	3503.4
27.5°	3385.1
30°	3249.5
32.5°	3096.6
35°	2929.0
37.5°	2744.1
40°	2537.0
42.5°	2283.0
45°	1965.0
47.5°	1580.4
50°	1181.0
52.5°	808.7
55°	520.2
57.5°	308.2
60°	180.0
62.5°	106.0
65°	59.2
67.5°	27.1
70°	7.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)