

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251415

Luminaire Tested: **LSR8B70D010 EC8B70927 8LBS0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P251415  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-17)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B70D010 EC8B70927 8LBS0B  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 2700 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5374.1 lumens  
Efficiency: N/A  
Efficacy: 70.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.25  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 75.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P251415

CATALOG NUMBER: LSR8B70D010 EC8B70927 8LBS0B

### Luminous Intensity Polar Plot

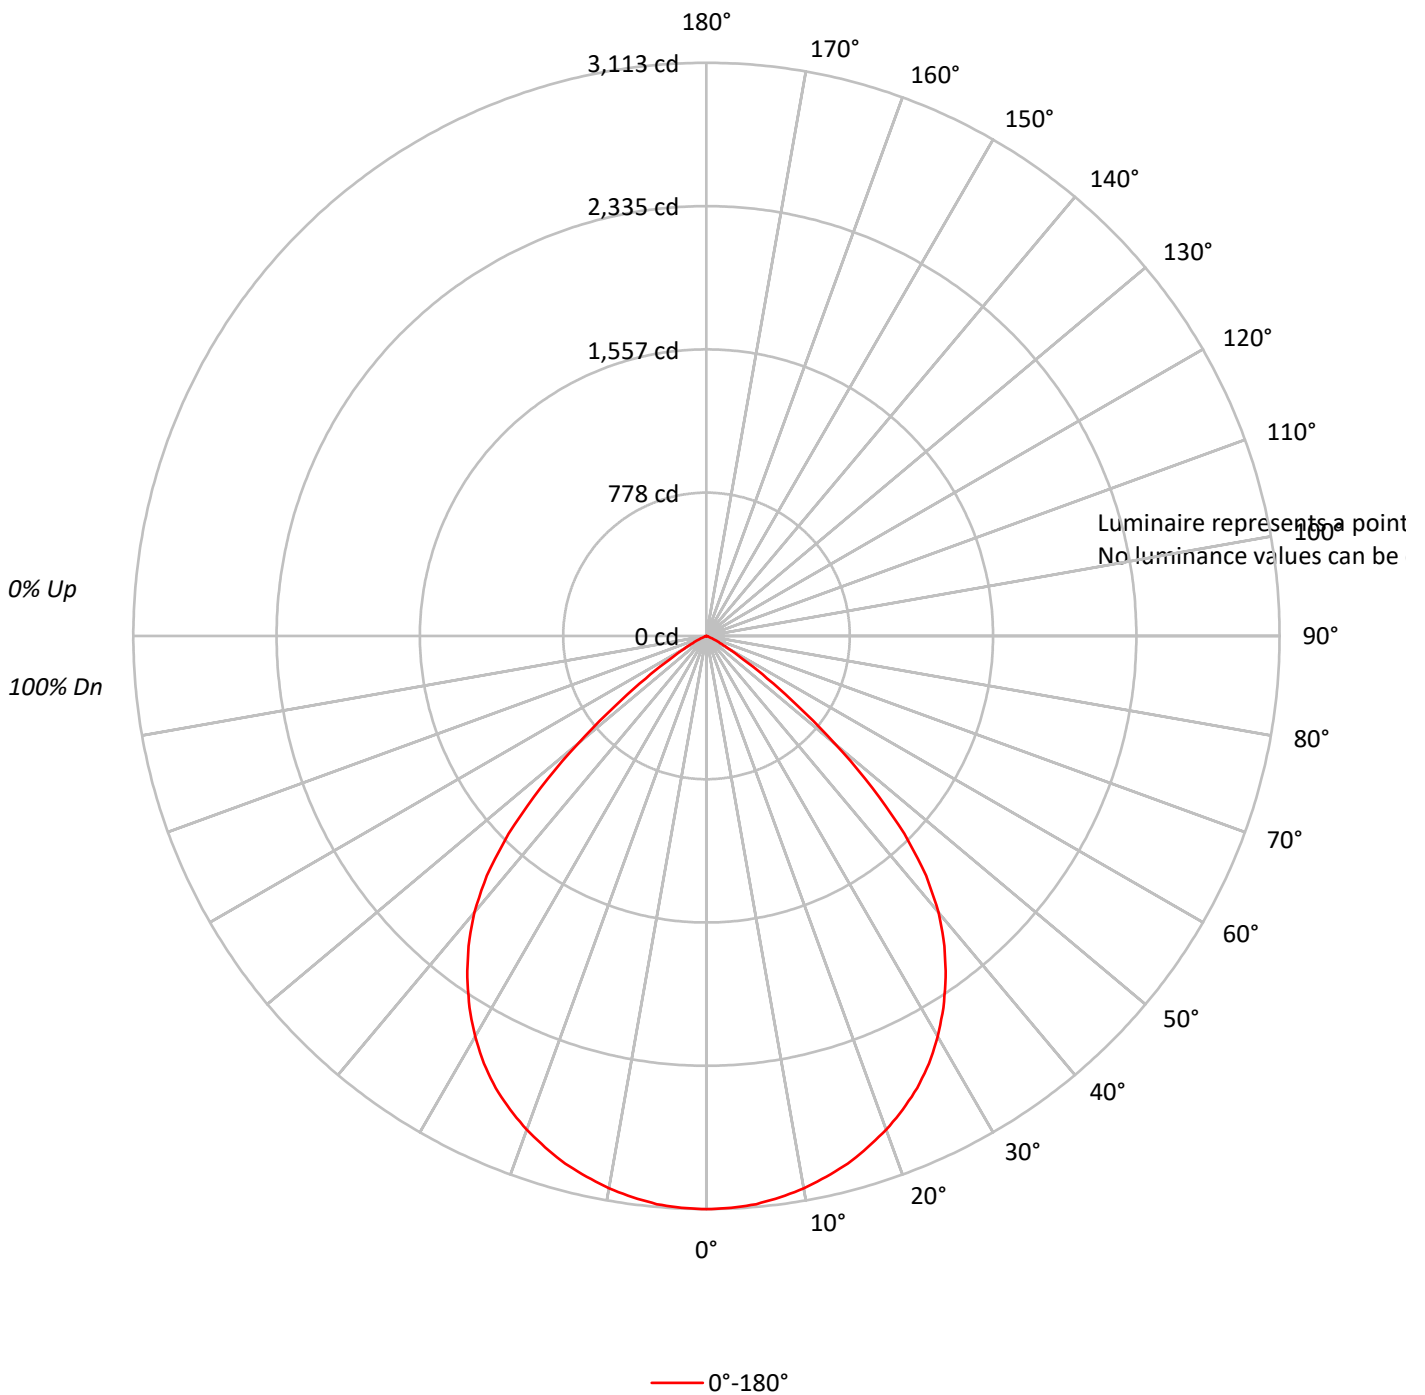



TEST NUMBER: P251415

CATALOG NUMBER: LSR8B70D010 EC8B70927 8LBS0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99		99	97	96		96	94	93	91
2	105	99	94	90	103	98	93	89	94	90	87		91	88	85		88	86	84	82
3	98	90	84	79	96	89	83	79	86	81	77		84	80	76		81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69		77	72	68		75	71	67	66
5	86	75	68	63	84	74	68	63	72	66	62		71	65	61		69	64	61	59
6	80	69	62	56	78	68	61	56	67	60	56		65	60	55		64	59	55	53
7	75	63	56	51	73	63	56	51	61	55	51		60	54	50		59	54	50	48
8	70	59	51	46	69	58	51	46	57	50	46		56	50	46		54	49	46	44
9	66	54	47	42	65	54	47	42	53	46	42		52	46	42		51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	39		48	42	38		47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P251415

CATALOG NUMBER: LSR8B70D010 EC8B70927 8LBS0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	294.0	5.5
10°-20°	836.2	15.6
20°-30°	1244.6	23.2
30°-40°	1409.6	26.2
40°-50°	1139.7	21.2
50°-60°	395.3	7.4
60°-70°	54.1	1.0
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2374.7	44.2
0°-40°	3784.4	70.4
0°-60°	5319.3	99.0
0°-90°	5374.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5374.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3113	
5°	3098	294
15°	2966	836
25°	2709	1245
35°	2265	1410
45°	1519	1140
55°	402	395
65°	46	54
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P251415

CATALOG NUMBER: LSR8B70D010 EC8B70927 8LBS0B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3113.2
2.5°	3109.4
5°	3097.9
7.5°	3075.1
10°	3046.5
12.5°	3008.4
15°	2966.4
17.5°	2913.1
20°	2853.9
22.5°	2785.3
25°	2709.0
27.5°	2617.5
30°	2512.7
32.5°	2394.5
35°	2264.8
37.5°	2121.9
40°	1961.8
42.5°	1765.4
45°	1519.4
47.5°	1222.0
50°	913.2
52.5°	625.3
55°	402.3
57.5°	238.3
60°	139.2
62.5°	82.0
65°	45.8
67.5°	20.9
70°	5.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)