

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250933

Luminaire Tested: **LSR8B70D010 EC8B70927 8LBW0H**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250933
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27940)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B70D010 EC8B70927 8LBW0H
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5911.9 lumens
Efficiency: N/A
Efficacy: 77.9 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.12
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250933

CATALOG NUMBER: LSR8B70D010 EC8B70927 8LBW0H

Luminous Intensity Polar Plot

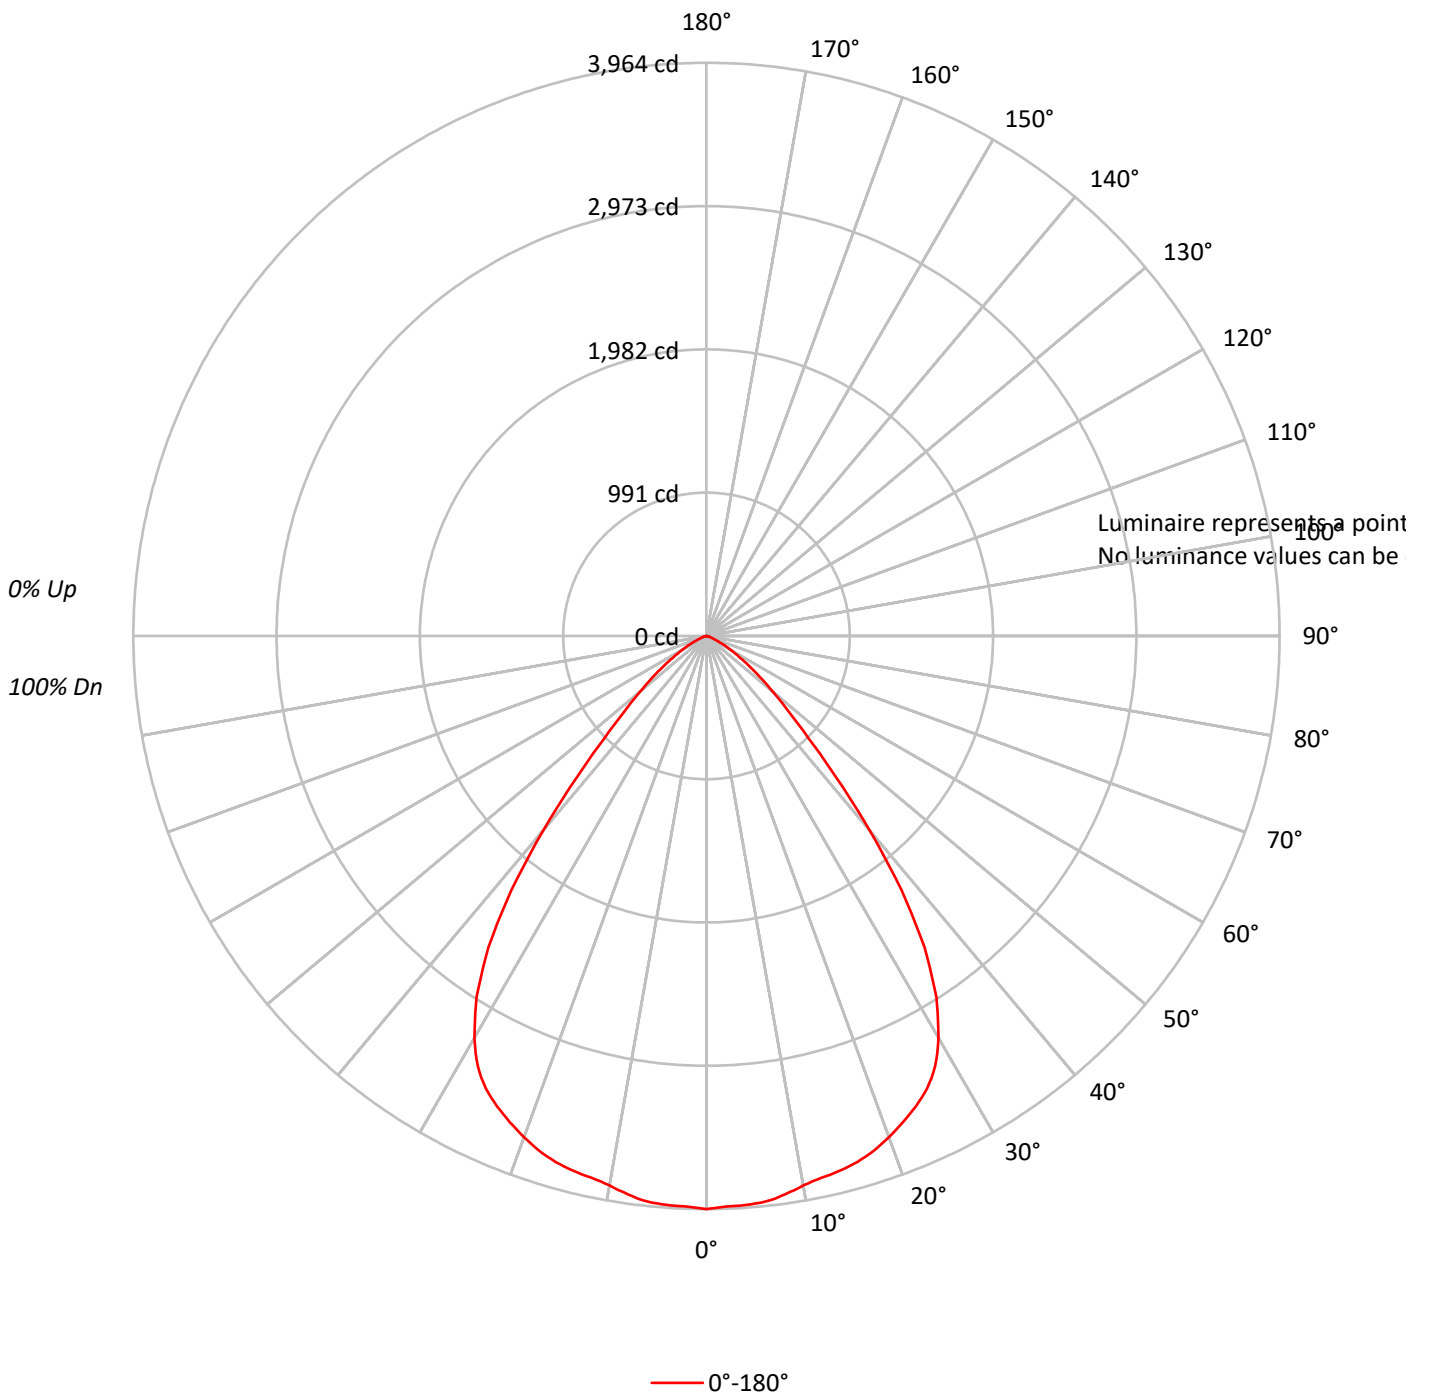



TEST NUMBER: P250933

CATALOG NUMBER: LSR8B70D010 EC8B70927 8LBW0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79		85	81	78		83	79	77	75
4	93	84	78	73	91	83	77	72	81	75	71		79	74	71		77	73	70	68
5	87	77	71	66	85	76	70	65	75	69	65		73	68	64		71	67	63	62
6	82	71	65	60	80	71	64	59	69	63	59		68	62	58		66	62	58	56
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		62	57	53	52
8	72	61	54	50	71	61	54	50	60	54	49		58	53	49		57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46		55	49	45		54	49	45	44
10	64	53	47	42	63	53	47	42	52	46	42		51	46	42		50	45	42	40

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P250933

CATALOG NUMBER: LSR8B70D010 EC8B70927 8LBW0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	373.5	6.3
10°-20°	1071.8	18.1
20°-30°	1613.0	27.3
30°-40°	1597.0	27.0
40°-50°	811.5	13.7
50°-60°	326.9	5.5
60°-70°	99.0	1.7
70°-80°	17.1	0.3
80°-90°	2.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3058.4	51.7
0°-40°	4655.4	78.7
0°-60°	5793.7	98.0
0°-90°	5911.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5911.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3964	
5°	3940	374
15°	3800	1072
25°	3523	1613
35°	2628	1597
45°	994	811
55°	352	327
65°	91	99
75°	14	17
85°	2	2
90°	0	



TEST NUMBER: P250933

CATALOG NUMBER: LSR8B70D010 EC8B70927 8LBW0H

CANDELA DISTRIBUTION (FULL):

0°	
0°	3964.2
1°	3955.6
2°	3948.8
3°	3947.1
4°	3945.4
5°	3940.2
6°	3933.3
7°	3919.7
8°	3899.2
9°	3880.5
10°	3859.9
11°	3842.8
12°	3830.8
13°	3822.3
14°	3812.1
15°	3800.1
16°	3784.7
17°	3765.9
18°	3743.8
19°	3718.1
20°	3689.1
21°	3658.3
22°	3627.6
23°	3595.0
24°	3560.8
25°	3523.3
26°	3482.3
27°	3429.3
28°	3367.8
29°	3294.3
30°	3209.0
32.5°	2959.4
35°	2628.0
37.5°	2214.5
40°	1753.1
42.5°	1324.2
45°	994.5
47.5°	760.4
50°	596.4
52.5°	463.0
55°	352.0
57.5°	261.4
60°	196.5
62.5°	140.1
65°	90.6



TEST NUMBER: P250933

CATALOG NUMBER: LSR8B70D010 EC8B70927 8LBW0H

CANDELA DISTRIBUTION (continued):

	0°
67.5°	56.4
70°	35.9
72.5°	22.2
75°	13.7
77.5°	8.5
80°	5.2
82.5°	3.4
85°	1.7
87.5°	0.0
90°	0.0

(END OF REPORT)