

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251119

Luminaire Tested: **LSR8B70D010 EC8B70935 8LBW0WH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P251119  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P200903)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B70D010 EC8B70935 8LBW0WH  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
90 CRI 3500 CCT WITH WHEAT TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6628.9 lumens  
Efficiency: N/A  
Efficacy: 87.3 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.11  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 75.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P251119

CATALOG NUMBER: LSR8B70D010 EC8B70935 8LBW0WH

### Luminous Intensity Polar Plot

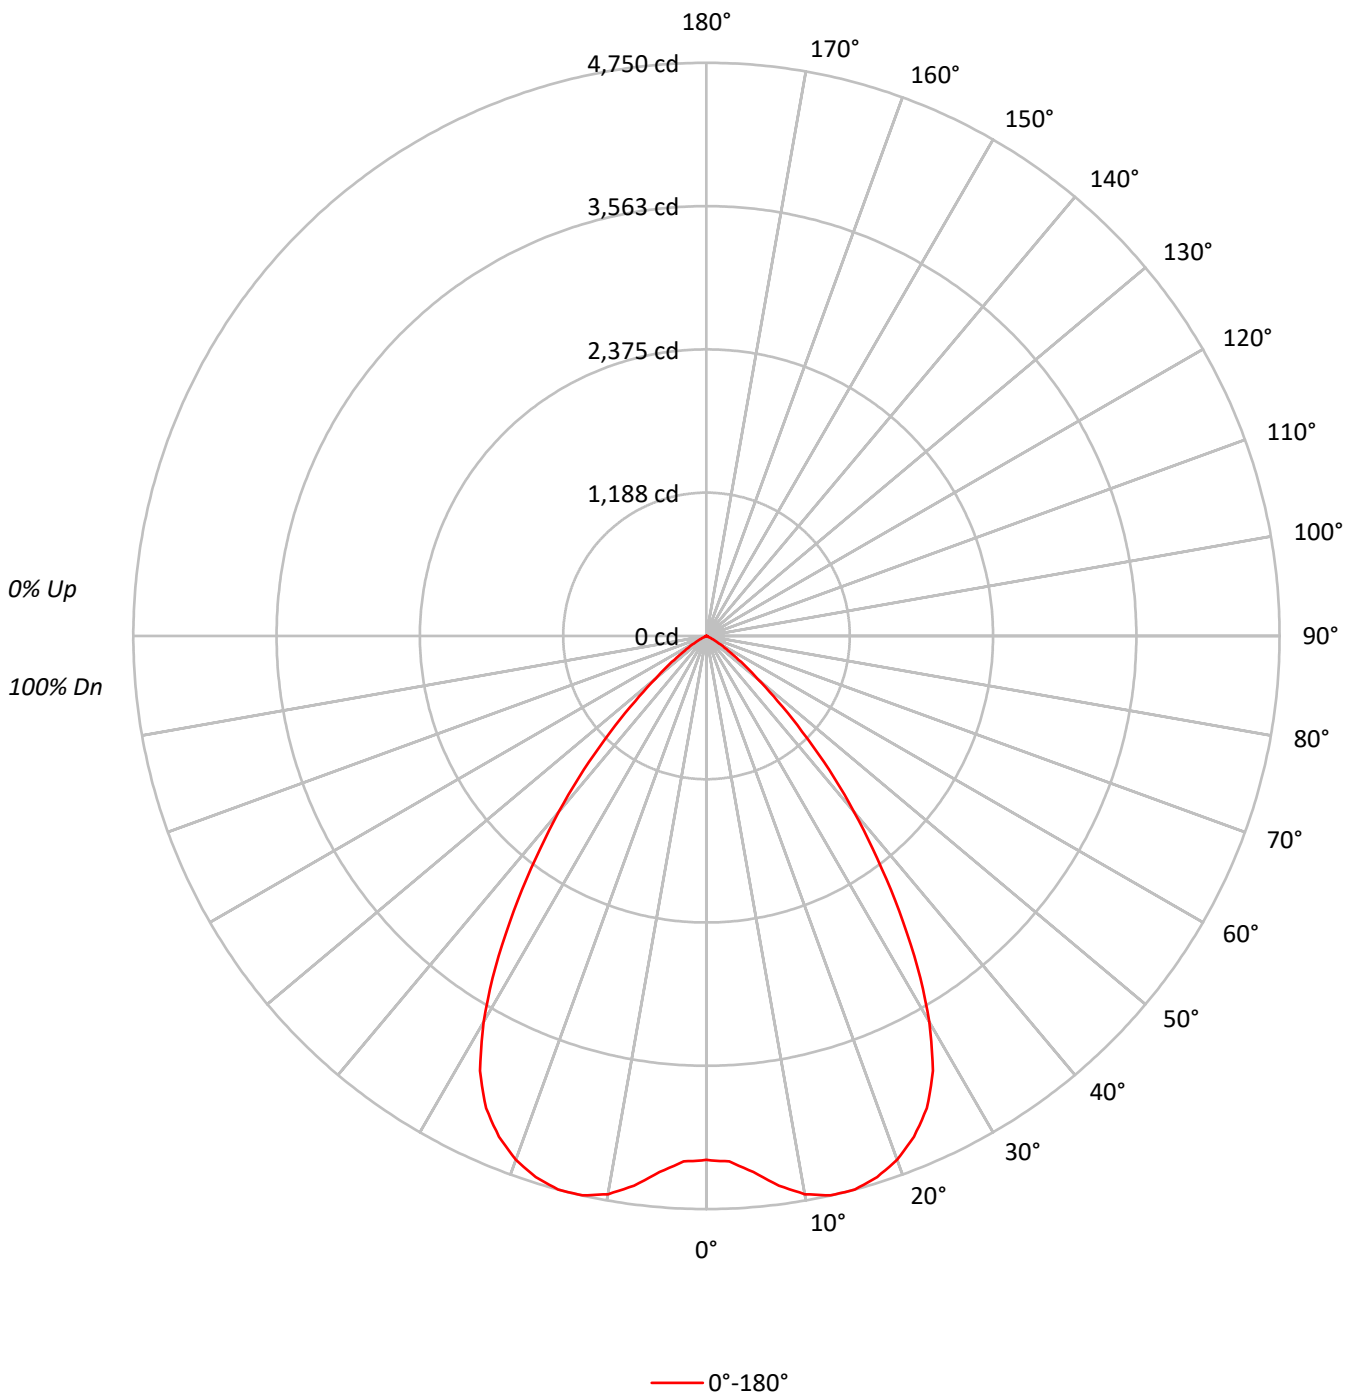



TEST NUMBER: P251119

CATALOG NUMBER: LSR8B70D010 EC8B70935 8LBW0WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64
6	83	73	67	62	82	73	66	62	71	65	61	69	64	61	68	64	60	59
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54
8	74	63	57	52	73	63	56	52	62	56	52	61	55	51	59	55	51	50
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	47	46
10	66	55	49	45	65	55	49	44	54	48	44	53	48	44	52	48	44	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	133910
5°	138015
10°	147107
15°	151646
20°	151636
25°	147005
30°	131570
35°	104794
40°	76567
45°	48908
50°	26447
55°	13596
60°	5908
65°	1211
70°	838
75°	0
80°	266
85°	0



TEST NUMBER: P251119

CATALOG NUMBER: LSR8B70D010 EC8B70935 8LBW0WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	433.9	6.5
10°-20°	1335.4	20.1
20°-30°	1959.1	29.6
30°-40°	1730.7	26.1
40°-50°	886.5	13.4
50°-60°	247.8	3.7
60°-70°	31.6	0.5
70°-80°	3.2	0.0
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3728.5	56.2
0°-40°	5459.1	82.4
0°-60°	6593.4	99.5
0°-90°	6628.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6628.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4343	
5°	4459	434
15°	4750	1335
25°	4321	1959
35°	2784	1731
45°	1122	886
55°	253	248
65°	17	32
75°	0	3
85°	0	1
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P251119

CATALOG NUMBER: LSR8B70D010 EC8B70935 8LBW0WH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4342.6
2.5°	4359.3
5°	4458.7
7.5°	4595.0
10°	4698.1
12.5°	4748.4
15°	4750.2
17.5°	4702.4
20°	4620.9
22.5°	4492.0
25°	4320.6
27.5°	4064.7
30°	3695.1
32.5°	3257.0
35°	2783.8
37.5°	2322.6
40°	1902.1
42.5°	1505.2
45°	1121.5
47.5°	800.4
50°	551.3
52.5°	385.3
55°	252.9
57.5°	160.6
60°	95.8
62.5°	49.7
65°	16.6
67.5°	10.8
70°	9.3
72.5°	5.4
75°	0.0
77.5°	1.5
80°	1.5
82.5°	1.5
85°	0.0
87.5°	0.0
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P251119

CATALOG NUMBER: LSR8B70D010 EC8B70935 8LBW0WH

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)