

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251413

Luminaire Tested: **LSR8B70D010 EC8B70950 8LBS0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251413
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-17)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B70D010 EC8B70950 8LBS0B
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 5000 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6327.0 lumens
Efficiency: N/A
Efficacy: 83.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.25
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251413

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBS0B

Luminous Intensity Polar Plot

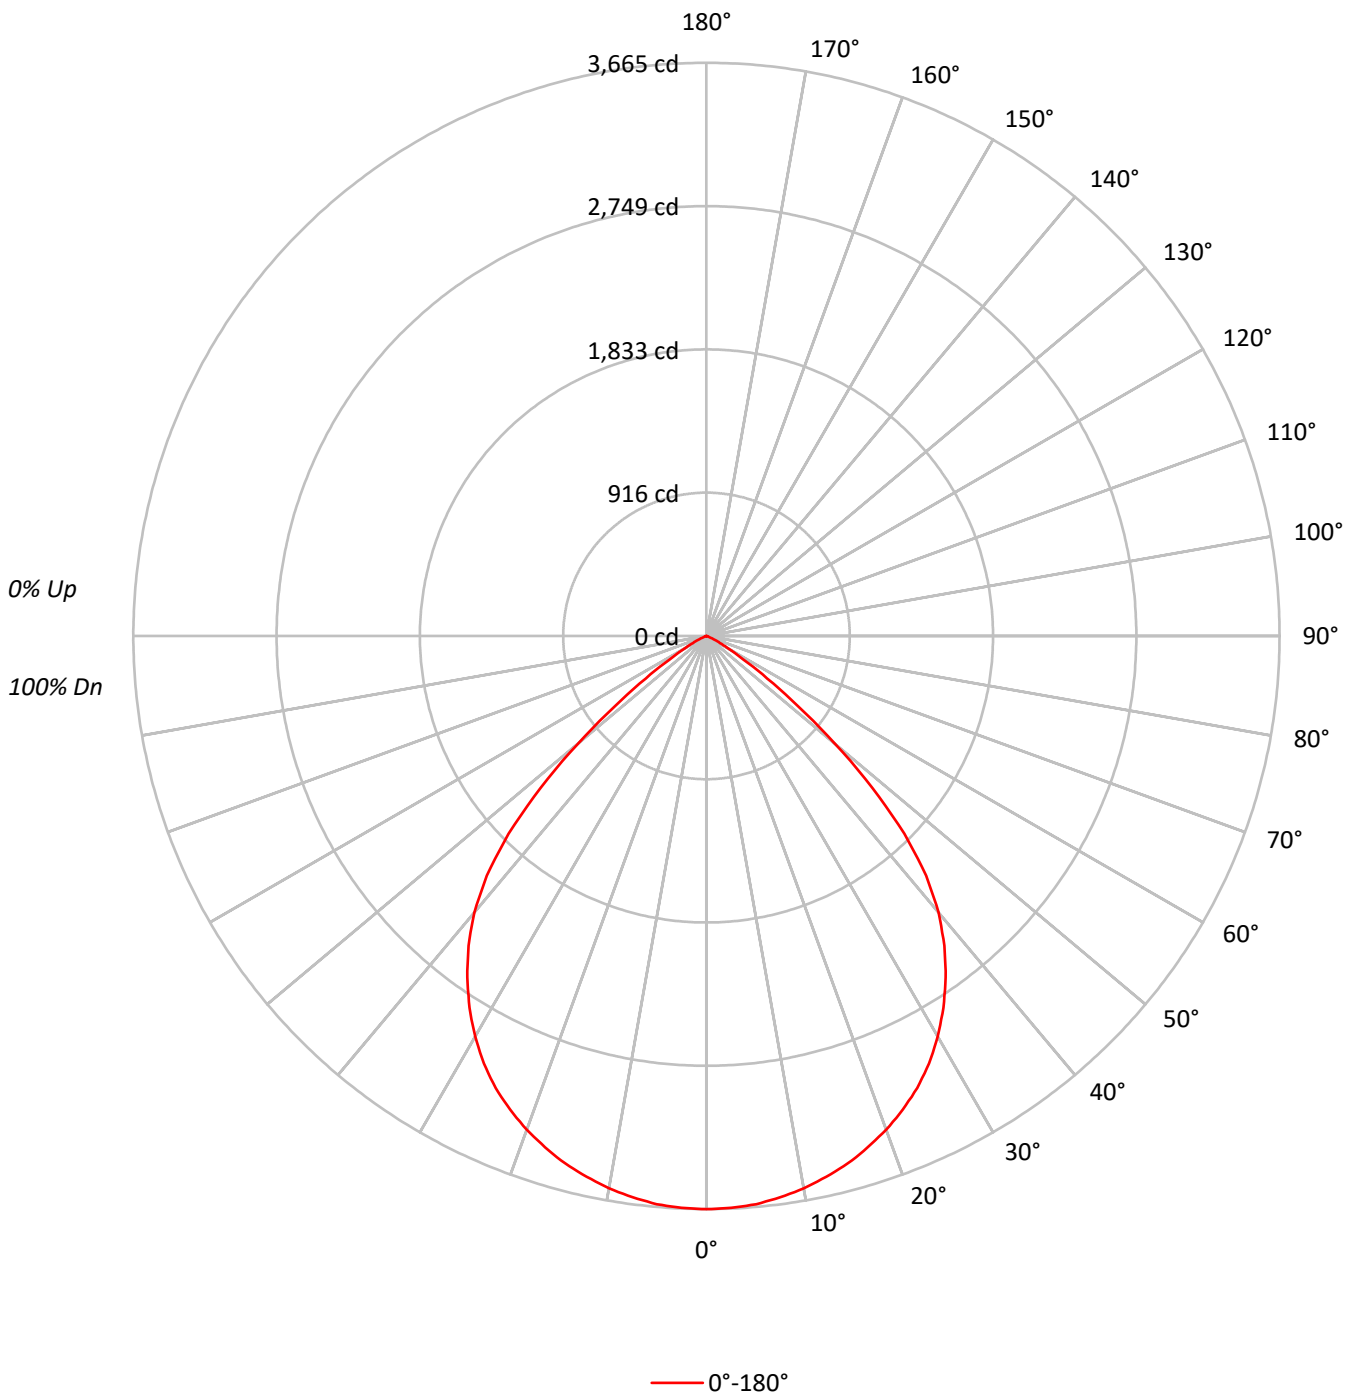



TEST NUMBER: P251413

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBS0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	99	94	90	103	98	93	89	94	90	87	91	88	85	88	86	84	82
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59
6	80	69	62	56	78	68	61	56	67	60	56	65	60	55	64	59	55	53
7	75	63	56	51	73	63	56	51	61	55	51	60	54	50	59	54	50	48
8	70	59	51	46	69	58	51	46	57	50	46	56	50	46	54	49	46	44
9	66	54	47	42	65	54	47	42	53	46	42	52	46	42	51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	39	48	42	38	47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	113021
5°	112899
10°	112307
15°	111492
20°	110259
25°	108516
30°	105332
35°	100374
40°	92971
45°	78008
50°	51576
55°	25461
60°	10102
65°	3933
70°	604
75°	0
80°	0
85°	0



TEST NUMBER: P251413

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBS0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	346.1	5.5
10°-20°	984.4	15.6
20°-30°	1465.3	23.2
30°-40°	1659.6	26.2
40°-50°	1341.7	21.2
50°-60°	465.4	7.4
60°-70°	63.6	1.0
70°-80°	0.9	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2795.8	44.2
0°-40°	4455.4	70.4
0°-60°	6262.5	99.0
0°-90°	6327.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6327.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3665	
5°	3647	346
15°	3492	984
25°	3189	1465
35°	2666	1660
45°	1789	1342
55°	474	465
65°	54	64
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P251413

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBS0B

CANDELA DISTRIBUTION (FULL):

	0°
0°	3665.2
2.5°	3660.7
5°	3647.3
7.5°	3620.3
10°	3586.7
12.5°	3541.8
15°	3492.4
17.5°	3429.5
20°	3360.0
22.5°	3279.2
25°	3189.4
27.5°	3081.7
30°	2958.2
32.5°	2819.1
35°	2666.4
37.5°	2498.1
40°	2309.6
42.5°	2078.4
45°	1788.8
47.5°	1438.7
50°	1075.1
52.5°	736.2
55°	473.6
57.5°	280.6
60°	163.8
62.5°	96.5
65°	53.9
67.5°	24.7
70°	6.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)