

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251193

Luminaire Tested: **LSR8B70D010 EC8B70950 8LBS0WH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251193
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-15)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B70D010 EC8B70950 8LBS0WH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 5000 CCT WITH WHEAT TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7754.0 lumens
Efficiency: N/A
Efficacy: 102.2 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.27 / 1.23
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251193

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBS0WH

Luminous Intensity Polar Plot

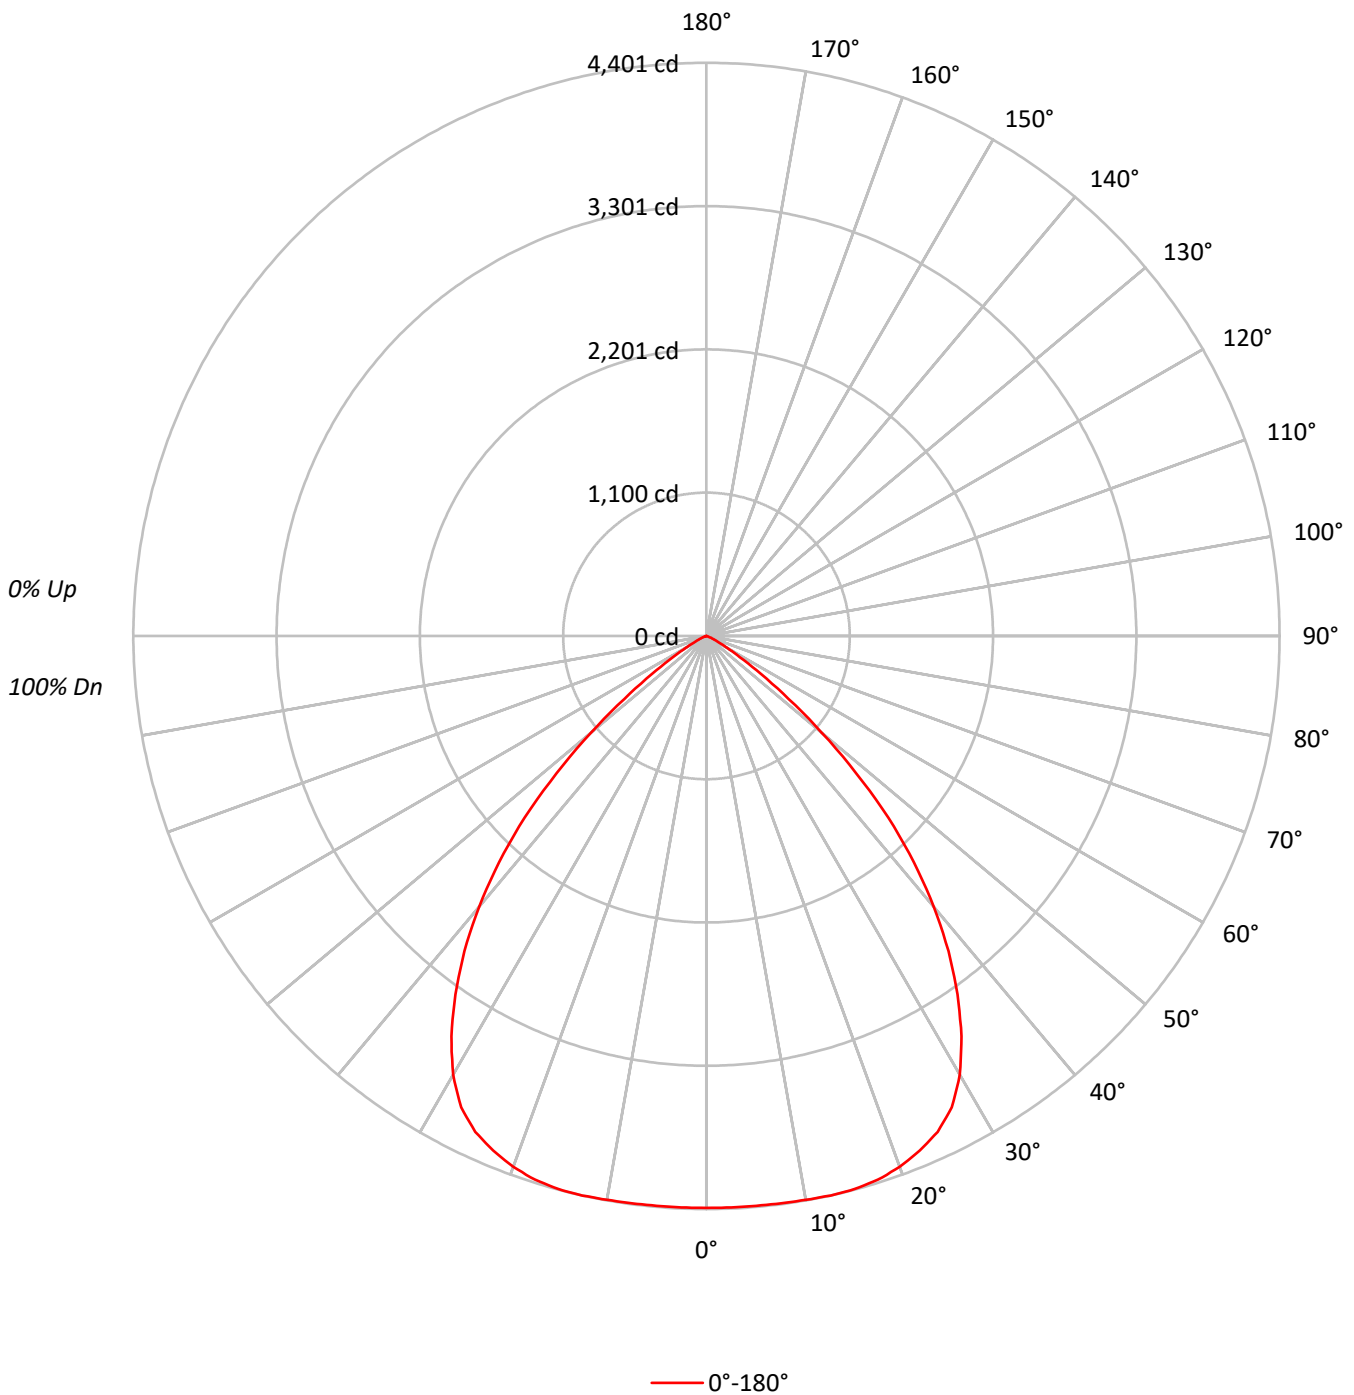



TEST NUMBER: P251193

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBS0WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96	94	93	91
2	105	100	95	91	103	98	93	90	94	91	88		91	88	86		89	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	92	83	76	71	90	82	76	71	79	74	70		77	73	69		75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63		71	66	62		70	65	62	60
6	80	70	63	57	79	69	62	57	67	61	57		66	60	56		64	60	56	54
7	75	64	57	52	74	63	57	52	62	56	51		61	55	51		60	55	51	49
8	71	59	52	47	69	59	52	47	57	51	47		56	51	47		55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43		52	47	43		51	46	43	41
10	63	51	44	40	61	51	44	40	50	44	39		49	43	39		48	43	39	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	135433
5°	135950
10°	137663
15°	140354
20°	142356
25°	142942
30°	138564
35°	126469
40°	109402
45°	86124
50°	55552
55°	27268
60°	11212
65°	4911
70°	1416
75°	536
80°	391
85°	0



TEST NUMBER: P251193

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBS0WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	419.4	5.4
10°-20°	1242.5	16.0
20°-30°	1923.6	24.8
30°-40°	2083.9	26.9
40°-50°	1499.6	19.3
50°-60°	501.7	6.5
60°-70°	75.8	1.0
70°-80°	6.5	0.1
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3585.5	46.2
0°-40°	5669.5	73.1
0°-60°	7670.8	98.9
0°-90°	7754.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7754.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4392	
5°	4392	419
15°	4396	1242
25°	4201	1924
35°	3360	2084
45°	1975	1500
55°	507	502
65°	67	76
75°	4	6
85°	0	1
90°	0	



TEST NUMBER: P251193

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBS0WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	4392.0
2.5°	4392.0
5°	4392.0
7.5°	4394.2
10°	4396.5
12.5°	4400.9
15°	4396.5
17.5°	4378.5
20°	4338.1
22.5°	4277.5
25°	4201.2
27.5°	4080.0
30°	3891.5
32.5°	3644.6
35°	3359.6
37.5°	3052.2
40°	2717.8
42.5°	2358.7
45°	1974.9
47.5°	1559.7
50°	1158.0
52.5°	794.5
55°	507.2
57.5°	303.0
60°	181.8
62.5°	110.0
65°	67.3
67.5°	33.7
70°	15.7
72.5°	6.7
75°	4.5
77.5°	4.5
80°	2.2
82.5°	2.2
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)