

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251347

Luminaire Tested: **LSR8B70D010 EC8B70950 8LBW0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251347
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-47)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B70D010 EC8B70950 8LBW0B
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 5000 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4419.0 lumens
Efficiency: N/A
Efficacy: 58.2 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.02
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251347

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBW0B

Luminous Intensity Polar Plot

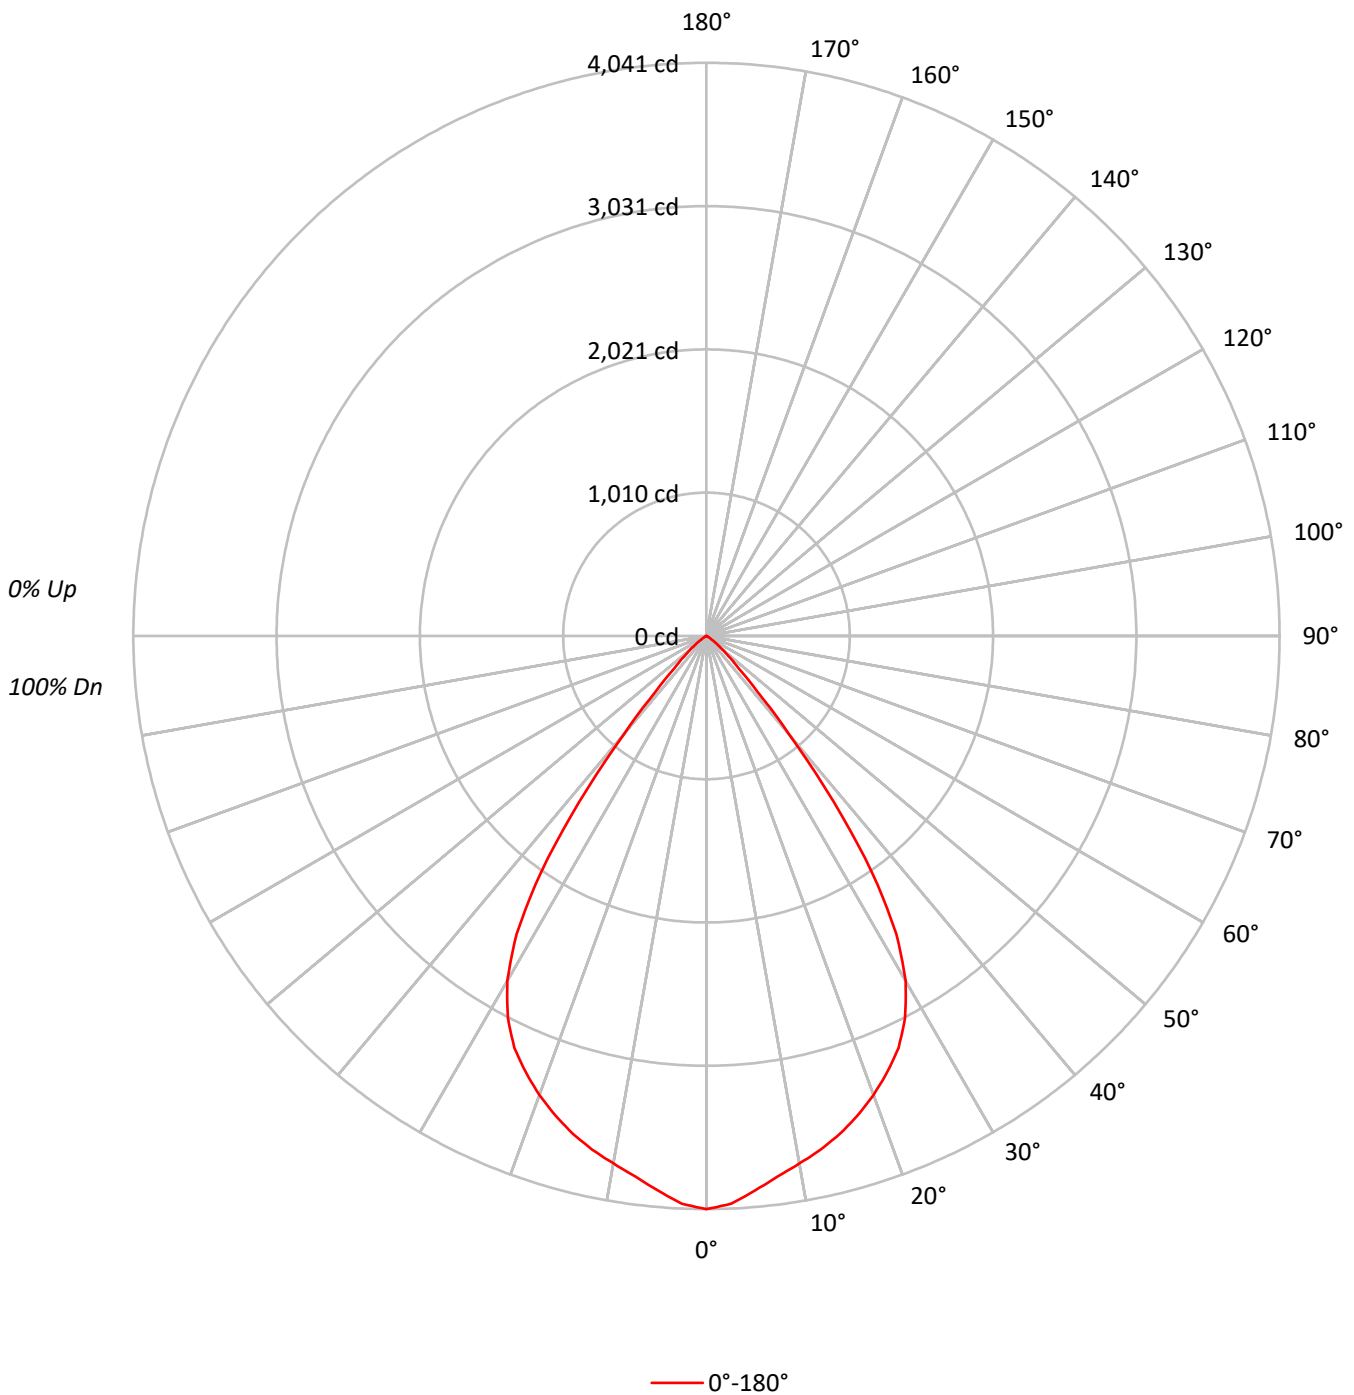



TEST NUMBER: P251347

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBW0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	106	111	108	106	104	104	102	101		101	99	98		97	96	95	93
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92	90	88	86
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86	84	81	80
4	96	88	83	78	94	87	82	78	85	80	77		83	79	76		81	78	75	74
5	91	82	76	72	89	81	76	71	80	75	71		78	74	70		76	73	70	68
6	86	77	71	66	85	76	70	66	74	69	65		73	68	65		72	68	65	63
7	82	72	66	61	80	71	65	61	70	64	61		69	64	60		67	63	60	58
8	77	67	61	57	76	67	61	57	66	60	56		65	60	56		64	59	56	54
9	73	63	57	53	72	63	57	53	62	56	52		61	56	52		60	55	52	51
10	70	59	53	49	68	59	53	49	58	53	49		57	52	49		57	52	49	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	124610
5°	121473
10°	118240
15°	116041
20°	113019
25°	109017
30°	100026
35°	76693
40°	36490
45°	13894
50°	6783
55°	2774
60°	691
65°	161
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P251347

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBW0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	370.0	8.4
10°-20°	1022.9	23.1
20°-30°	1460.5	33.1
30°-40°	1210.4	27.4
40°-50°	298.5	6.8
50°-60°	53.7	1.2
60°-70°	3.0	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2853.4	64.6
0°-40°	4063.8	92.0
0°-60°	4416.0	99.9
0°-90°	4419.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4419.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4041	
5°	3924	370
15°	3635	1023
25°	3204	1461
35°	2037	1210
45°	319	298
55°	52	54
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P251347

CATALOG NUMBER: LSR8B70D010 EC8B70950 8LBW0B

CANDELA DISTRIBUTION (FULL):

0°	
0°	4041.0
2.5°	4007.3
5°	3924.3
7.5°	3843.5
10°	3776.2
12.5°	3711.1
15°	3634.9
17.5°	3545.1
20°	3444.1
22.5°	3329.7
25°	3204.1
27.5°	3033.5
30°	2809.2
32.5°	2492.8
35°	2037.3
37.5°	1471.9
40°	906.5
42.5°	527.3
45°	318.6
47.5°	210.9
50°	141.4
52.5°	92.0
55°	51.6
57.5°	24.7
60°	11.2
62.5°	4.5
65°	2.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)