

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251007

Luminaire Tested: **LSR8B70D010 EC8B709730 8LBS0H**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251007
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B70D010 EC8B709730 8LBS0H
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH SEMI-SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6080.0 lumens
Efficiency: N/A
Efficacy: 80.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251007

CATALOG NUMBER: LSR8B70D010 EC8B709730 8LBS0H

Luminous Intensity Polar Plot

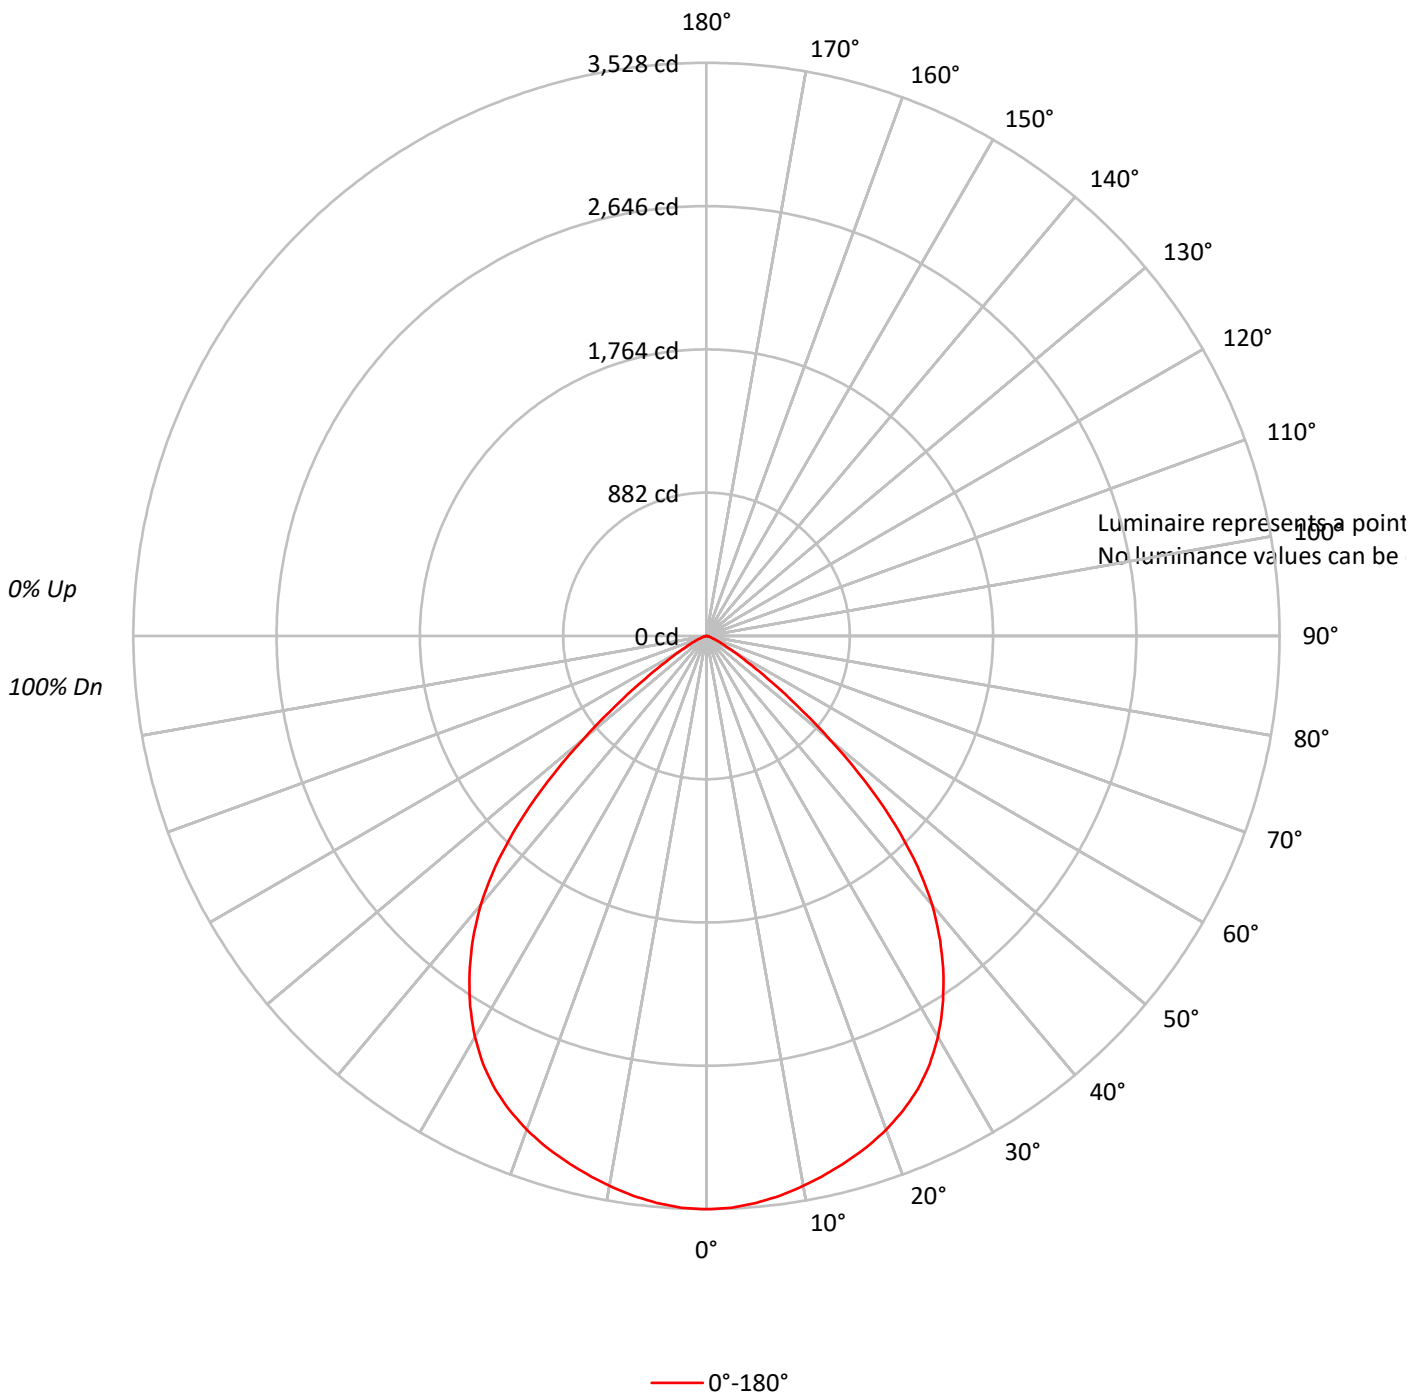



TEST NUMBER: P251007

CATALOG NUMBER: LSR8B70D010 EC8B709730 8LBS0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77		83	79	76		81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69		76	72	68		74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62		70	65	61		69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56		65	59	55		63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50		60	54	50		59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46		55	50	46		54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42		51	46	42		51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	37

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P251007

CATALOG NUMBER: LSR8B70D010 EC8B709730 8LBS0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.3	5.5
10°-20°	944.8	15.5
20°-30°	1413.3	23.2
30°-40°	1580.8	26.0
40°-50°	1240.1	20.4
50°-60°	452.5	7.4
60°-70°	92.3	1.5
70°-80°	19.8	0.3
80°-90°	4.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2690.4	44.2
0°-40°	4271.1	70.2
0°-60°	5963.8	98.1
0°-90°	6080.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6080.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3528	
5°	3503	332
15°	3347	945
25°	3078	1413
35°	2544	1581
45°	1642	1240
55°	463	452
65°	84	92
75°	18	20
85°	4	4
90°	0	



TEST NUMBER: P251007

CATALOG NUMBER: LSR8B70D010 EC8B709730 8LBS0H

CANDELA DISTRIBUTION (FULL):

	0°
0°	3528.4
2.5°	3523.0
5°	3503.3
7.5°	3474.6
10°	3437.0
12.5°	3393.9
15°	3347.3
17.5°	3295.3
20°	3234.4
22.5°	3162.6
25°	3078.4
27.5°	2974.4
30°	2850.7
32.5°	2705.5
35°	2544.1
37.5°	2363.0
40°	2162.2
42.5°	1923.8
45°	1642.3
47.5°	1324.9
50°	995.0
52.5°	697.4
55°	462.6
57.5°	295.8
60°	190.0
62.5°	125.5
65°	84.3
67.5°	53.8
70°	34.1
72.5°	23.3
75°	17.9
77.5°	12.6
80°	9.0
82.5°	5.4
85°	3.6
87.5°	1.8
90°	0.0

(END OF REPORT)