

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250372

Luminaire Tested: **LSR8B80D010 EC8B80827 8LBN0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P250372  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13948)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B80D010 EC8B80827 8LBN0B  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 2700 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4637.0 lumens  
Efficiency: N/A  
Efficacy: 62.3 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.77  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 74.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P250372

CATALOG NUMBER: LSR8B80D010 EC8B80827 8LBN0B

### Luminous Intensity Polar Plot

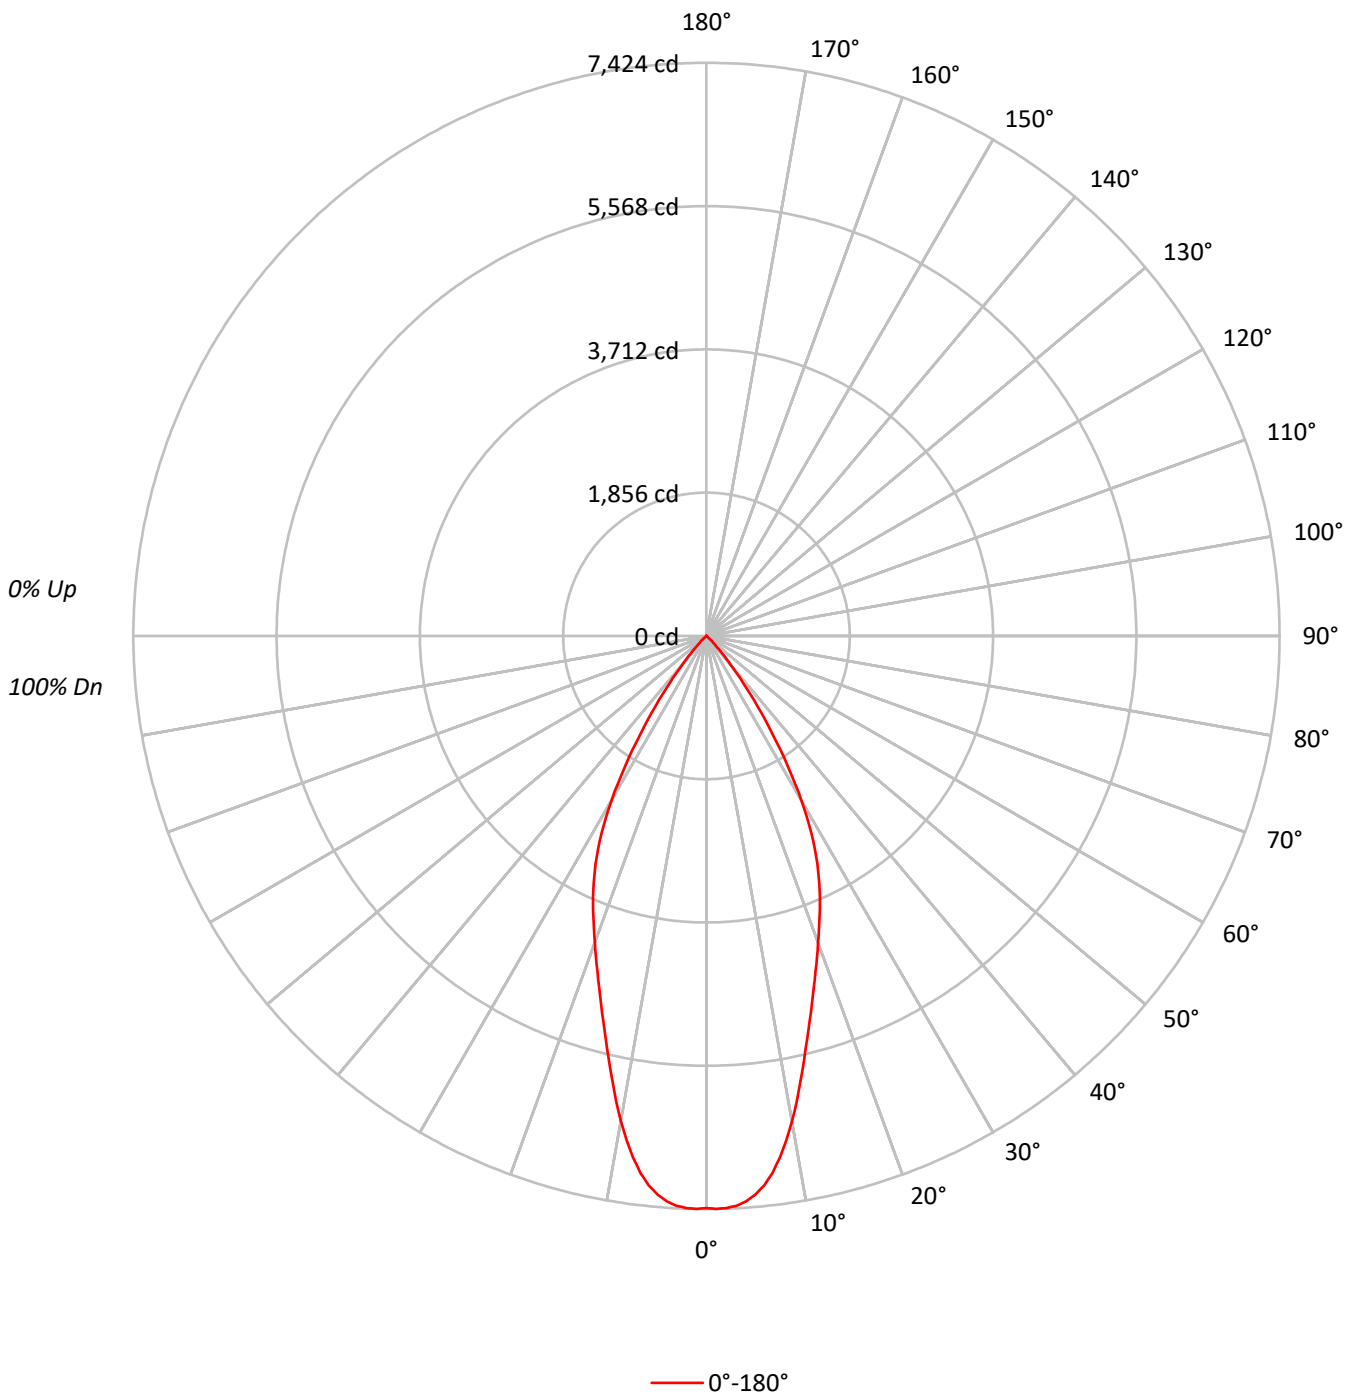



TEST NUMBER: P250372

CATALOG NUMBER: LSR8B80D010 EC8B80827 8LBN0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102		101	100	99		98	97	96	94
2	109	104	101	97	107	103	99	96	99	97	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	88		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	90	82	77	73	89	81	76	72	80	75	72		79	75	71		77	74	71	70
7	86	78	72	68	85	77	72	68	76	71	68		75	71	67		74	70	67	66
8	83	74	68	64	81	73	68	64	72	67	64		71	67	64		70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61		68	63	60		67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57		65	60	57		64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	228482
5°	224829
10°	199755
15°	164783
20°	138779
25°	117053
30°	87642
35°	49600
40°	19612
45°	5264
50°	1007
55°	0
60°	148
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P250372

CATALOG NUMBER: LSR8B80D010 EC8B80827 8LBN0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	665.1	14.3
10°-20°	1445.7	31.2
20°-30°	1552.0	33.5
30°-40°	838.8	18.1
40°-50°	130.9	2.8
50°-60°	3.6	0.1
60°-70°	0.9	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3662.8	79.0
0°-40°	4501.7	97.1
0°-60°	4636.1	100.0
0°-90°	4637.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4637.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7410	
5°	7263	665
15°	5162	1446
25°	3440	1552
35°	1318	839
45°	121	131
55°	0	4
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P250372

CATALOG NUMBER: LSR8B80D010 EC8B80827 8LBN0B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7409.5
1°	7423.5
2°	7416.6
3°	7391.2
4°	7342.4
5°	7263.3
6°	7154.5
7°	7008.2
8°	6824.9
9°	6614.0
10°	6379.5
11°	6133.6
12°	5878.4
13°	5623.5
14°	5386.6
15°	5161.7
16°	4955.2
17°	4755.6
18°	4570.0
19°	4396.3
20°	4229.1
21°	4066.6
22°	3913.4
23°	3760.6
24°	3600.5
25°	3440.3
26°	3277.8
27°	3092.4
28°	2888.1
29°	2679.6
30°	2461.4
31°	2227.1
32°	1992.6
33°	1760.7
34°	1526.5
35°	1317.6
37.5°	842.1
40°	487.2
42.5°	259.9
45°	120.7
47.5°	65.1
50°	21.0
52.5°	2.4
55°	0.0
57.5°	2.4



TEST NUMBER: P250372

CATALOG NUMBER: LSR8B80D010 EC8B80827 8LBN0B

**CANDELA DISTRIBUTION (continued):**

	0°
60°	2.4
62.5°	0.0
65°	0.0
67.5°	2.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)