

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247062

Luminaire Tested: **LSR8B80D010 EC8B80850 8LBW0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P247062
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P25264)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B80D010 EC8B80850 8LBW0LI
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 5000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9030.0 lumens
Efficiency: N/A
Efficacy: 121.4 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.22
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 74.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P247062

CATALOG NUMBER: LSR8B80D010 EC8B80850 8LBW0LI

Luminous Intensity Polar Plot

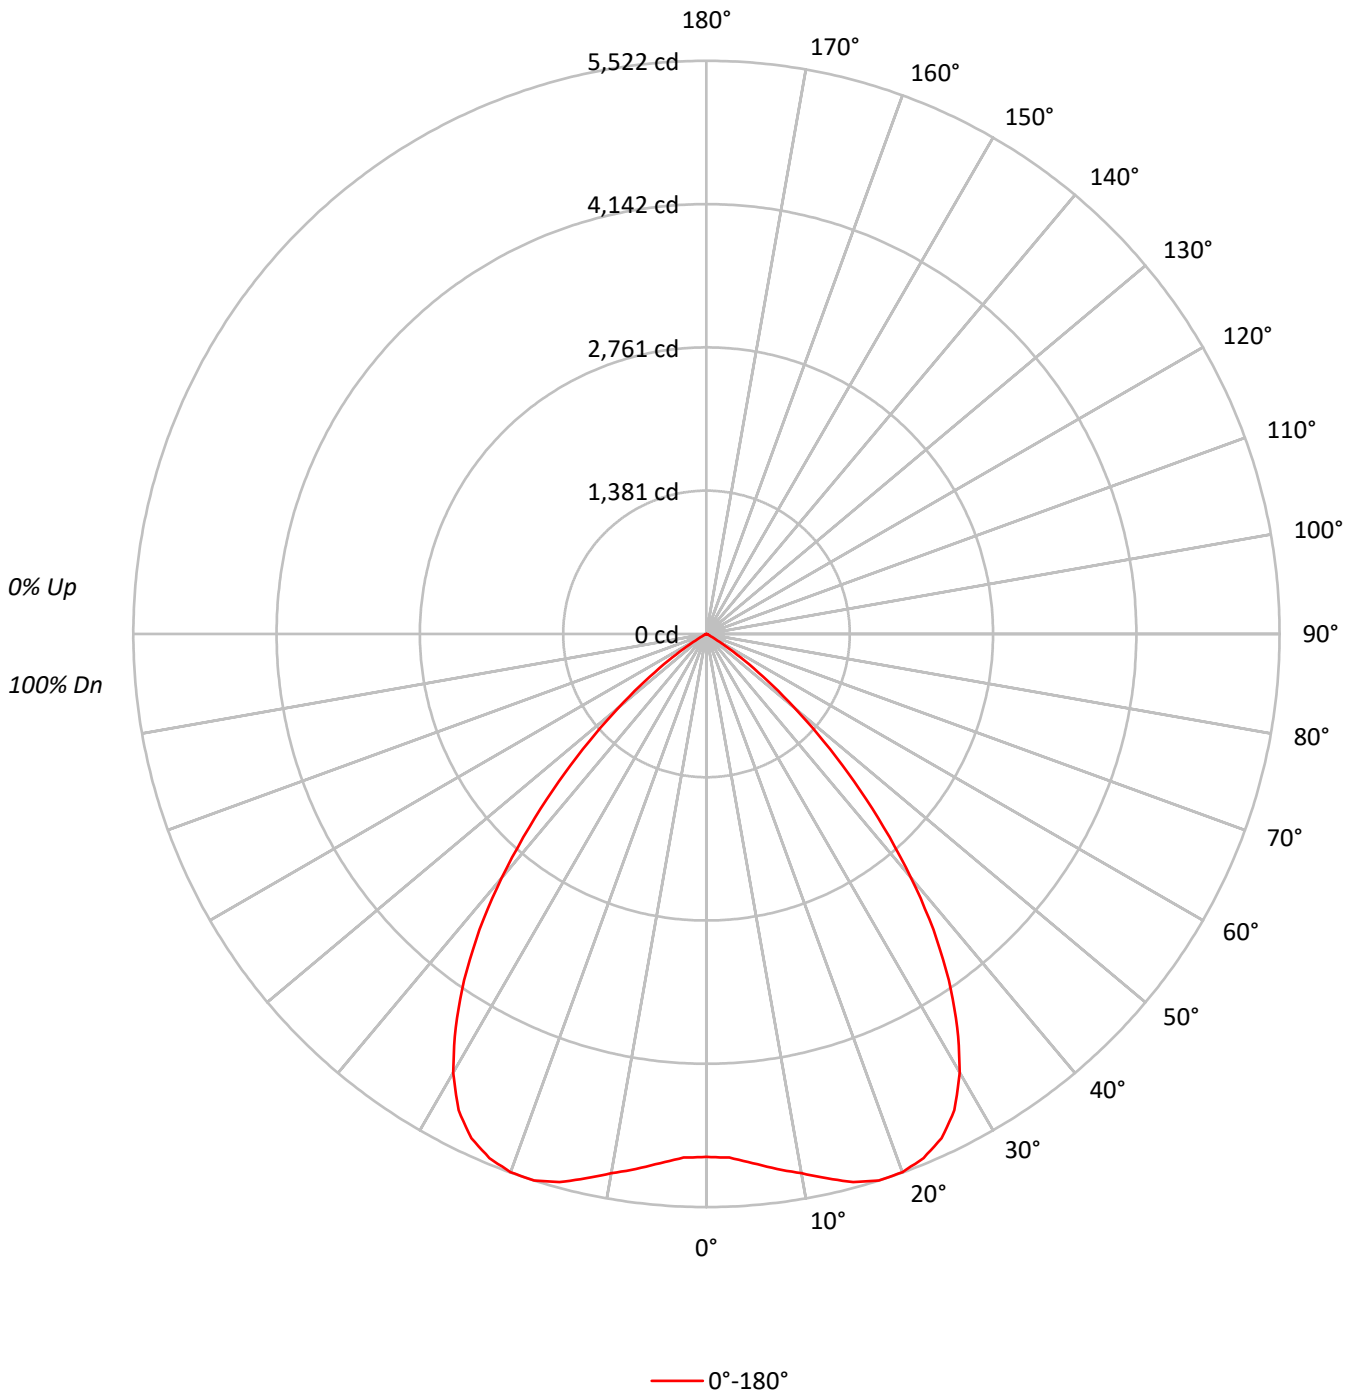



TEST NUMBER: P247062

CATALOG NUMBER: LSR8B80D010 EC8B80850 8LBW0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	94	92
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75
4	93	84	78	73	91	83	77	72	81	75	71	79	74	70	77	73	70	68
5	87	77	70	65	85	76	70	65	74	69	64	73	68	64	71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56
7	77	66	59	54	75	65	58	54	64	58	53	62	57	53	61	56	53	51
8	72	61	54	49	71	60	54	49	59	53	49	58	52	48	57	52	48	47
9	68	56	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	155381
5°	158414
10°	165208
15°	174542
20°	181085
25°	182400
30°	173775
35°	153280
40°	123564
45°	87728
50°	52722
55°	23752
60°	6124
65°	1321
70°	649
75°	441
80°	213
85°	0



TEST NUMBER: P247062

CATALOG NUMBER: LSR8B80D010 EC8B80850 8LBW0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	493.7	5.5
10°-20°	1545.8	17.1
20°-30°	2444.5	27.1
30°-40°	2511.8	27.8
40°-50°	1558.1	17.3
50°-60°	441.7	4.9
60°-70°	29.8	0.3
70°-80°	4.0	0.0
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4484.0	49.7
0°-40°	6995.8	77.5
0°-60°	8995.6	99.6
0°-90°	9030.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9030.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5039	
5°	5118	494
15°	5467	1546
25°	5361	2445
35°	4072	2512
45°	2012	1558
55°	442	442
65°	18	30
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P247062

CATALOG NUMBER: LSR8B80D010 EC8B80850 8LBW0LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	5038.9
2.5°	5048.6
5°	5117.7
7.5°	5198.8
10°	5276.2
12.5°	5371.8
15°	5467.4
17.5°	5521.9
20°	5518.3
22.5°	5465.0
25°	5360.9
27.5°	5172.1
30°	4880.4
32.5°	4496.7
35°	4071.8
37.5°	3591.3
40°	3069.6
42.5°	2527.3
45°	2011.7
47.5°	1532.4
50°	1099.0
52.5°	739.6
55°	441.8
57.5°	227.6
60°	99.3
62.5°	40.0
65°	18.1
67.5°	10.9
70°	7.2
72.5°	4.9
75°	3.7
77.5°	2.4
80°	1.2
82.5°	1.2
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)