

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247758

Luminaire Tested: **LSR8B80D010 EC8B80927 8LBS0MW**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P247758
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-88)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B80D010 EC8B80927 8LBS0MW
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 2700 CCT WITH MATTE WHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7257.5 lumens
Efficiency: N/A
Efficacy: 97.5 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.24
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 74.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P247758

CATALOG NUMBER: LSR8B80D010 EC8B80927 8LBS0MW

Luminous Intensity Polar Plot

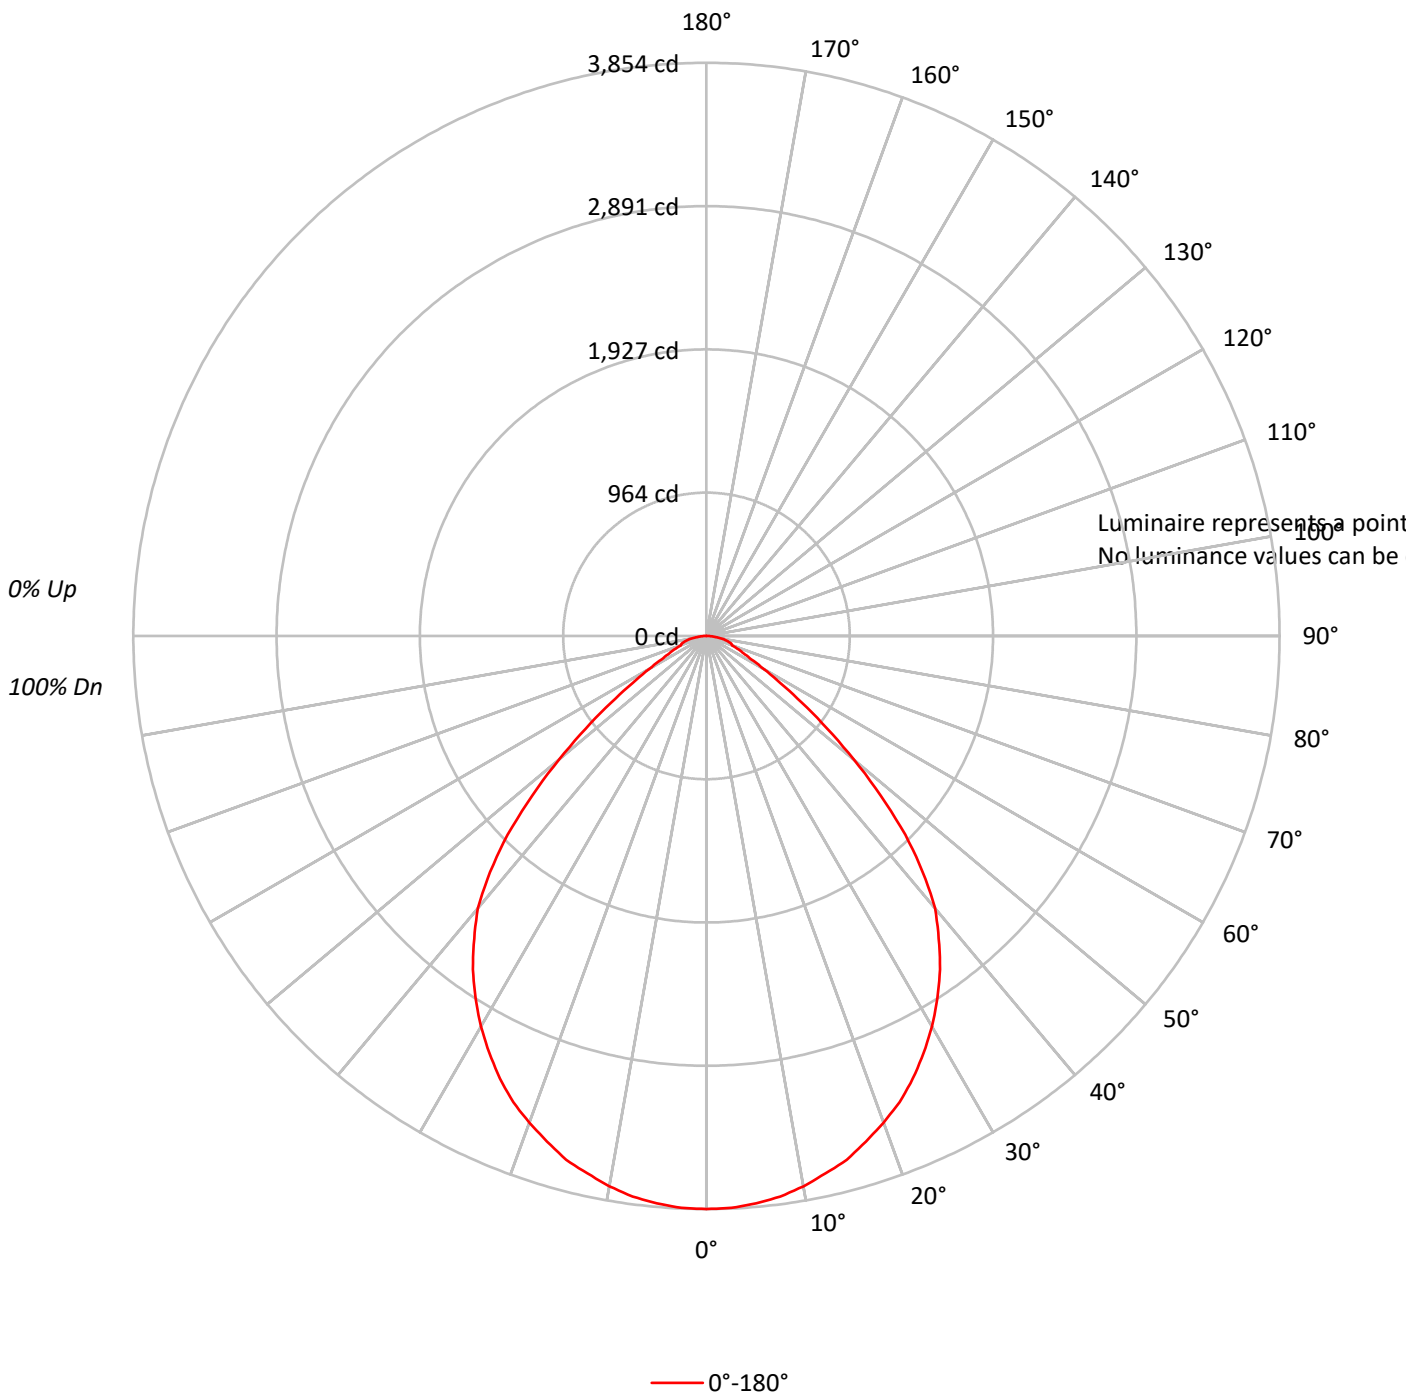



TEST NUMBER: P247758

CATALOG NUMBER: LSR8B80D010 EC8B80927 8LBS0MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	108	104	101	109	105	102	100	101	99	96		97	95	94		94	92	91	89
2	103	97	91	87	101	95	90	86	92	87	84		88	85	82		86	83	80	78
3	96	87	81	75	94	86	80	75	83	78	73		80	76	72		78	74	71	69
4	89	79	72	66	87	78	71	66	75	69	65		73	68	64		71	67	63	61
5	83	72	64	59	81	71	64	58	69	62	58		67	61	57		65	60	57	55
6	77	66	58	52	75	65	57	52	63	56	52		61	56	51		60	55	51	49
7	72	60	52	47	70	59	52	47	58	51	47		57	51	46		55	50	46	44
8	67	55	48	43	66	55	47	42	53	47	42		52	46	42		51	46	42	40
9	63	51	44	39	62	51	44	39	50	43	39		49	43	38		48	42	38	37
10	60	47	40	36	58	47	40	35	46	40	35		45	39	35		44	39	35	33

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P247758

CATALOG NUMBER: LSR8B80D010 EC8B80927 8LBS0MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	363.4	5.0
10°-20°	1025.9	14.1
20°-30°	1509.3	20.8
30°-40°	1704.8	23.5
40°-50°	1435.7	19.8
50°-60°	724.4	10.0
60°-70°	283.8	3.9
70°-80°	160.3	2.2
80°-90°	49.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2898.6	39.9
0°-40°	4603.5	63.4
0°-60°	6763.6	93.2
0°-90°	7257.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7257.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3854	
5°	3830	363
15°	3647	1026
25°	3284	1509
35°	2738	1705
45°	1891	1436
55°	782	724
65°	275	284
75°	156	160
85°	45	50
90°	0	



TEST NUMBER: P247758

CATALOG NUMBER: LSR8B80D010 EC8B80927 8LBS0MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	3853.8
2.5°	3849.9
5°	3829.5
7.5°	3802.8
10°	3757.4
12.5°	3701.0
15°	3646.9
17.5°	3564.7
20°	3482.4
22.5°	3393.2
25°	3284.3
27.5°	3161.4
30°	3032.9
32.5°	2888.8
35°	2738.4
37.5°	2566.0
40°	2391.4
42.5°	2153.2
45°	1890.8
47.5°	1590.1
50°	1292.4
52.5°	1023.8
55°	781.8
57.5°	589.1
60°	443.4
62.5°	338.4
65°	275.0
67.5°	224.0
70°	181.7
72.5°	175.5
75°	155.9
77.5°	130.0
80°	109.7
82.5°	69.8
85°	44.7
87.5°	14.1
90°	0.0

(END OF REPORT)