

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246994

Luminaire Tested: **LSR8B80D010 EC8B80930 8LBM0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P246994
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-81)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B80D010 EC8B80930 8LBM0LI
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7103.8 lumens
Efficiency: N/A
Efficacy: 95.5 lumens/watt
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.75
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 74.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P246994

CATALOG NUMBER: LSR8B80D010 EC8B80930 8LBM0LI

Luminous Intensity Polar Plot

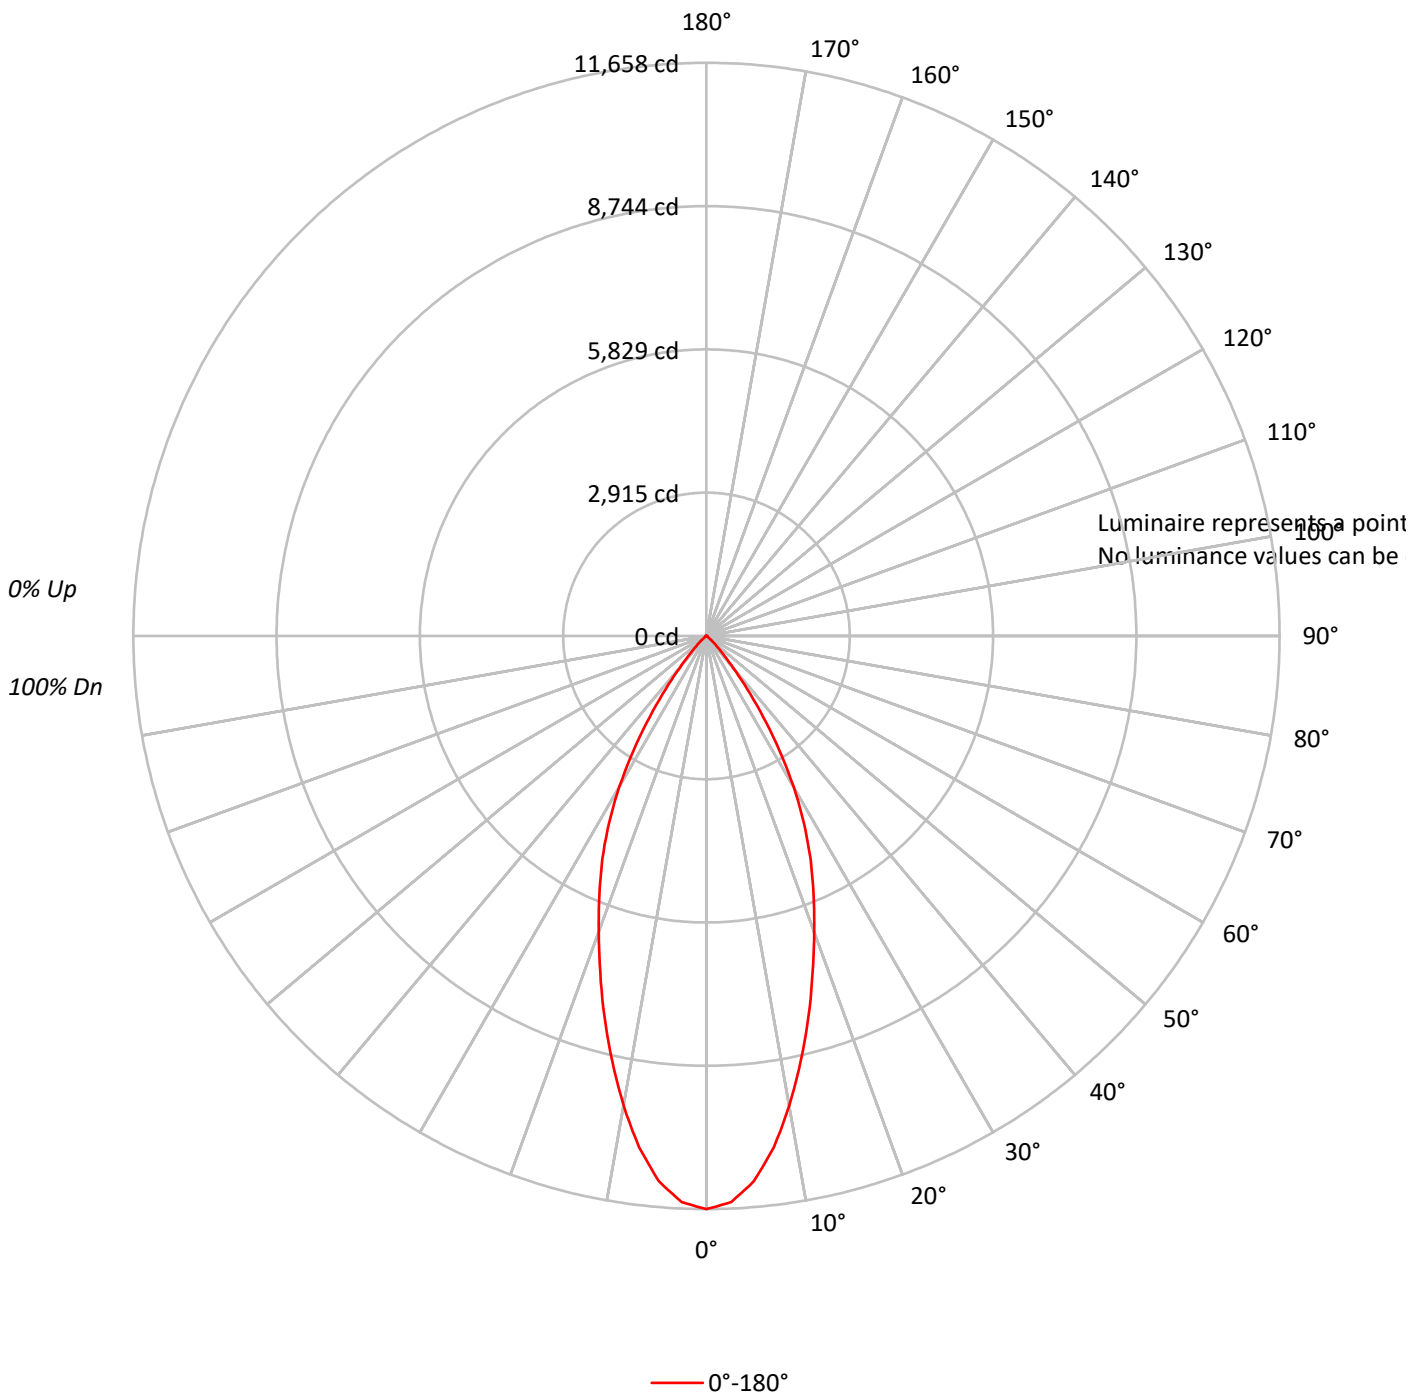



TEST NUMBER: P246994

CATALOG NUMBER: LSR8B80D010 EC8B80930 8LBM0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87		91	88	86		89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85	82	79	78
5	94	87	81	77	93	86	81	77	84	79	76		82	78	75		81	77	75	73
6	90	82	76	72	89	81	76	72	79	75	71		78	74	71		77	73	70	69
7	86	77	72	68	85	77	71	68	75	71	67		74	70	67		73	69	67	65
8	82	73	68	64	81	73	67	64	72	67	63		71	66	63		70	66	63	62
9	79	70	64	60	78	69	64	60	68	63	60		67	63	60		67	63	60	58
10	75	66	61	57	74	66	61	57	65	60	57		64	60	57		64	60	57	55

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P246994

CATALOG NUMBER: LSR8B80D010 EC8B80930 8LBM0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1016.0	14.3
10°-20°	2227.3	31.4
20°-30°	2271.5	32.0
30°-40°	1272.2	17.9
40°-50°	271.3	3.8
50°-60°	33.6	0.5
60°-70°	8.8	0.1
70°-80°	2.1	0.0
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5514.7	77.6
0°-40°	6786.9	95.5
0°-60°	7091.8	99.8
0°-90°	7103.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7103.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11658	
5°	11129	###
15°	8019	2227
25°	5007	2271
35°	2017	1272
45°	301	271
55°	26	34
65°	10	9
75°	3	2
85°	3	1
90°	0	



TEST NUMBER: P246994

CATALOG NUMBER: LSR8B80D010 EC8B80930 8LBM0LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	11657.5
2.5°	11526.2
5°	11129.0
7.5°	10489.8
10°	9701.1
12.5°	8854.7
15°	8018.8
17.5°	7178.2
20°	6405.2
22.5°	5685.9
25°	5007.1
27.5°	4294.3
30°	3542.0
32.5°	2755.9
35°	2016.7
37.5°	1351.0
40°	839.9
42.5°	502.1
45°	301.4
47.5°	167.6
50°	98.3
52.5°	52.0
55°	25.6
57.5°	18.2
60°	15.7
62.5°	7.4
65°	9.9
67.5°	9.9
70°	0.8
72.5°	2.5
75°	3.3
77.5°	1.7
80°	0.0
82.5°	0.8
85°	3.3
87.5°	0.0
90°	0.0

(END OF REPORT)