

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246986

Luminaire Tested: **LSR8B80D010 EC8B80950 8LBM0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P246986
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-81)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B80D010 EC8B80950 8LBM0LI
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 5000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7932.0 lumens
Efficiency: N/A
Efficacy: 106.6 lumens/watt
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.75
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 74.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P246986

CATALOG NUMBER: LSR8B80D010 EC8B80950 8LBM0LI

Luminous Intensity Polar Plot

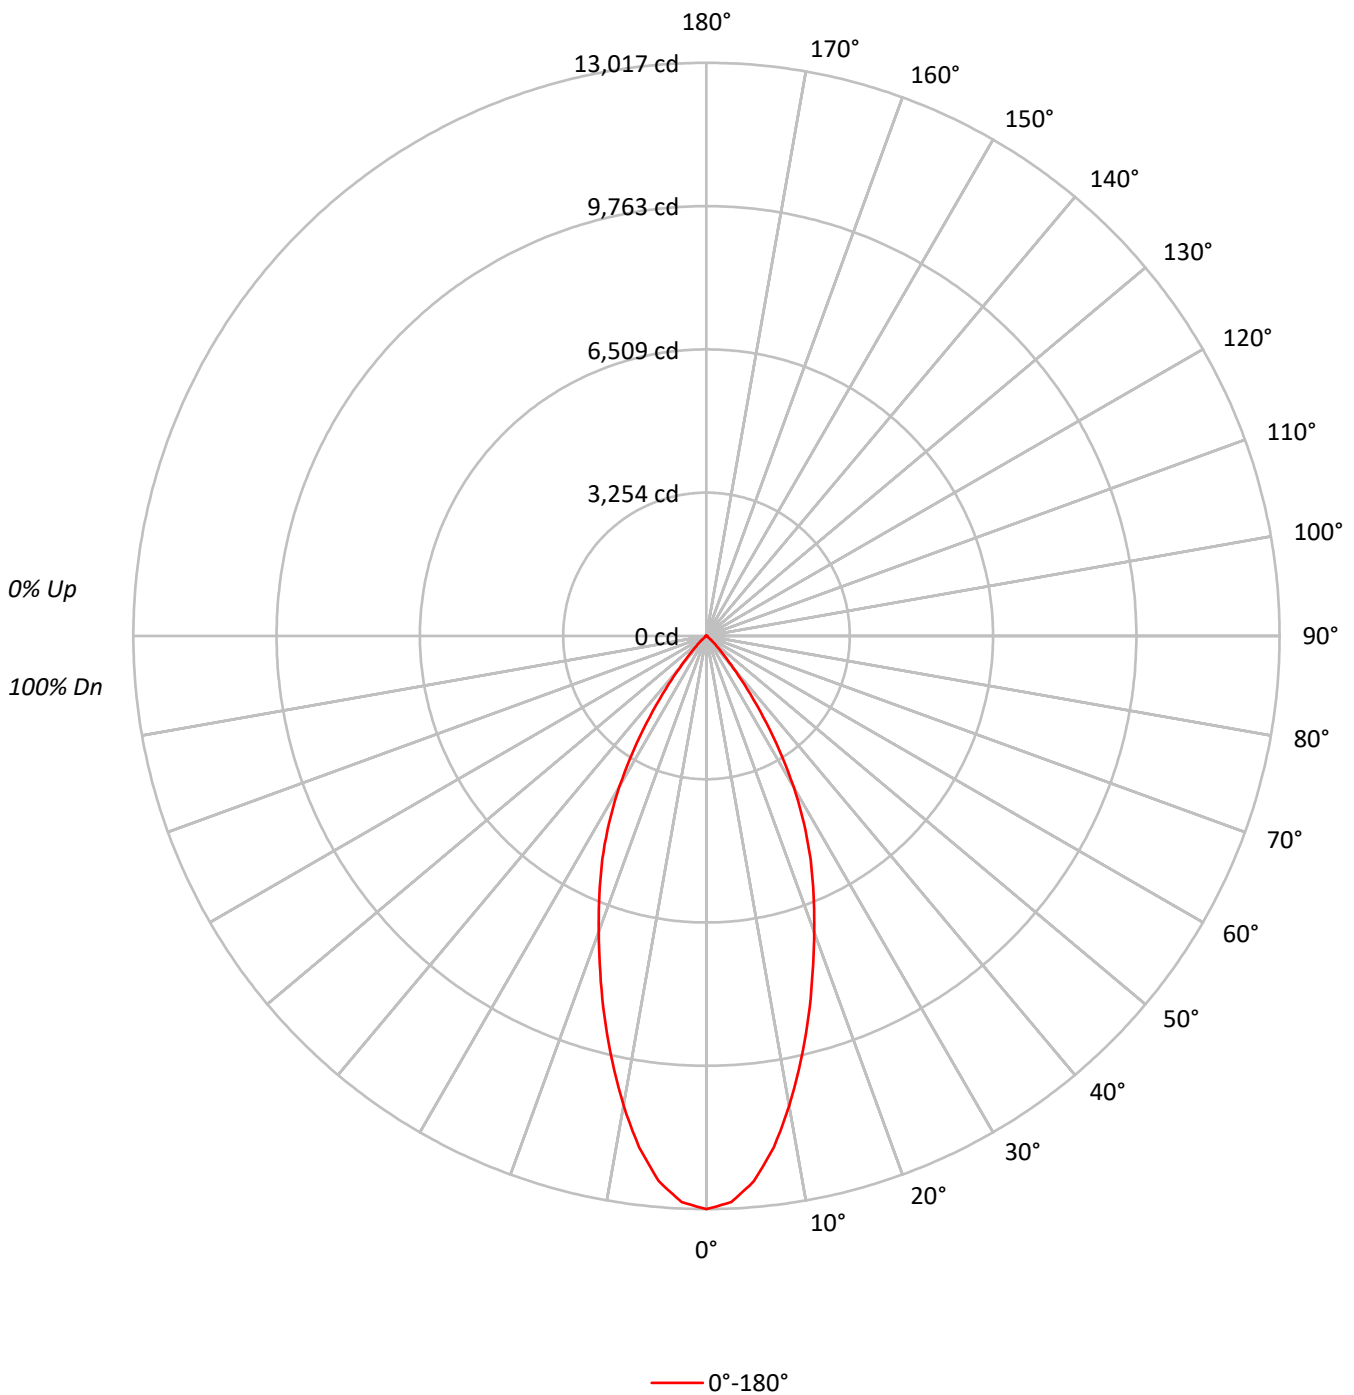



TEST NUMBER: P246986

CATALOG NUMBER: LSR8B80D010 EC8B80950 8LBM0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87		91	88	86		89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85	82	79	78
5	94	87	81	77	93	86	81	77	84	79	76		82	78	75		81	77	75	73
6	90	82	76	72	89	81	76	72	79	75	71		78	74	71		77	73	70	69
7	86	77	72	68	85	77	71	68	75	71	67		74	70	67		73	69	67	65
8	82	73	68	64	81	73	67	64	72	67	63		71	66	63		70	66	63	62
9	79	70	64	60	78	69	64	60	68	63	60		67	63	60		67	63	60	58
10	75	66	61	57	74	66	61	57	65	60	57		64	60	57		64	60	57	55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	401387
5°	384651
10°	339178
15°	285842
20°	234695
25°	190222
30°	140825
35°	84767
40°	37750
45°	14679
50°	5263
55°	1538
60°	1079
65°	810
70°	81
75°	441
80°	0
85°	1309



TEST NUMBER: P246986

CATALOG NUMBER: LSR8B80D010 EC8B80950 8LBM0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1134.5	14.3
10°-20°	2486.9	31.4
20°-30°	2536.3	32.0
30°-40°	1420.5	17.9
40°-50°	302.9	3.8
50°-60°	37.5	0.5
60°-70°	9.8	0.1
70°-80°	2.3	0.0
80°-90°	1.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6157.7	77.6
0°-40°	7578.2	95.5
0°-60°	7918.6	99.8
0°-90°	7932.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7932.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13017	
5°	12426	###
15°	8954	2487
25°	5591	2536
35°	2252	1420
45°	337	303
55°	29	38
65°	11	10
75°	4	2
85°	4	1
90°	0	



TEST NUMBER: P246986

CATALOG NUMBER: LSR8B80D010 EC8B80950 8LBM0LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	13016.7
2.5°	12870.0
5°	12426.5
7.5°	11712.8
10°	10832.2
12.5°	9887.0
15°	8953.8
17.5°	8015.1
20°	7152.0
22.5°	6348.8
25°	5590.8
27.5°	4795.0
30°	3955.0
32.5°	3077.1
35°	2251.8
37.5°	1508.6
40°	937.8
42.5°	560.6
45°	336.6
47.5°	187.2
50°	109.7
52.5°	58.1
55°	28.6
57.5°	20.3
60°	17.5
62.5°	8.3
65°	11.1
67.5°	11.1
70°	0.9
72.5°	2.8
75°	3.7
77.5°	1.8
80°	0.0
82.5°	0.9
85°	3.7
87.5°	0.0
90°	0.0

(END OF REPORT)