

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247326

Luminaire Tested: **LSR8B80D010 EC8B809727 8LBM0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P247326
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201734)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B80D010 EC8B809727 8LBM0WMH
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 2700 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5543.0 lumens
Efficiency: N/A
Efficacy: 74.5 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.9
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 74.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P247326

CATALOG NUMBER: LSR8B80D010 EC8B809727 8LBM0WMH

Luminous Intensity Polar Plot

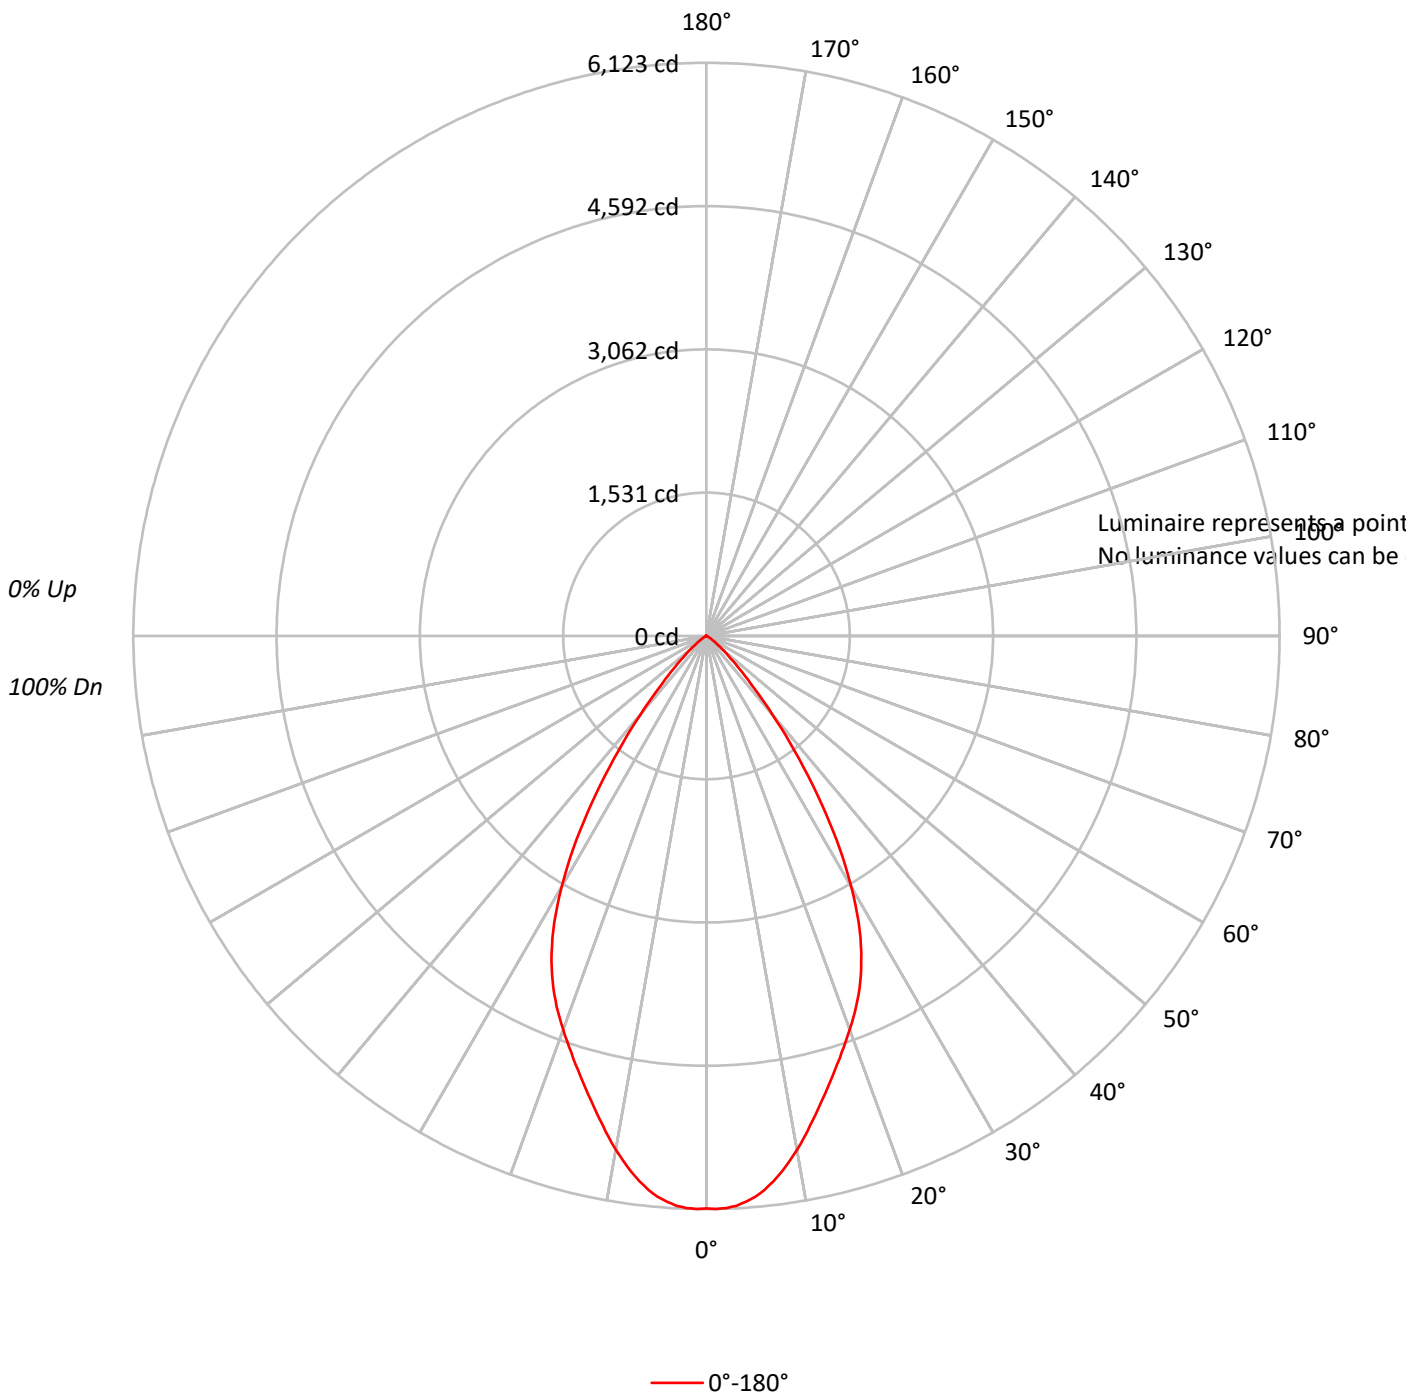



TEST NUMBER: P247326

CATALOG NUMBER: LSR8B80D010 EC8B809727 8LBM0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 113 | 111 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 103 | 101 | 101 | 99 | 98 | 97 | 96 | 95 | 93 |
| 2 | 108 | 103 | 99 | 95 | 105 | 101 | 97 | 94 | 98 | 95 | 92 | 95 | 92 | 90 | 92 | 90 | 88 | 86 |
| 3 | 102 | 95 | 90 | 86 | 100 | 94 | 89 | 86 | 91 | 87 | 84 | 89 | 86 | 83 | 87 | 84 | 82 | 80 |
| 4 | 97 | 89 | 83 | 79 | 95 | 88 | 82 | 78 | 86 | 81 | 77 | 84 | 80 | 77 | 82 | 78 | 76 | 74 |
| 5 | 92 | 83 | 77 | 73 | 90 | 82 | 76 | 72 | 80 | 75 | 72 | 79 | 74 | 71 | 77 | 73 | 70 | 69 |
| 6 | 87 | 78 | 72 | 67 | 85 | 77 | 71 | 67 | 75 | 70 | 66 | 74 | 69 | 66 | 73 | 69 | 66 | 64 |
| 7 | 82 | 73 | 67 | 62 | 81 | 72 | 66 | 62 | 71 | 66 | 62 | 70 | 65 | 61 | 68 | 64 | 61 | 60 |
| 8 | 78 | 68 | 62 | 58 | 77 | 68 | 62 | 58 | 67 | 61 | 58 | 66 | 61 | 57 | 65 | 60 | 57 | 56 |
| 9 | 74 | 64 | 58 | 54 | 73 | 64 | 58 | 54 | 63 | 58 | 54 | 62 | 57 | 54 | 61 | 57 | 54 | 52 |
| 10 | 71 | 61 | 55 | 51 | 70 | 60 | 55 | 51 | 60 | 54 | 51 | 59 | 54 | 51 | 58 | 54 | 50 | 49 |

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P247326

CATALOG NUMBER: LSR8B80D010 EC8B809727 8LBM0WMH

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 559.5 | 10.1 |
| 10°-20° | 1403.0 | 25.3 |
| 20°-30° | 1771.1 | 32.0 |
| 30°-40° | 1274.1 | 23.0 |
| 40°-50° | 421.7 | 7.6 |
| 50°-60° | 91.8 | 1.7 |
| 60°-70° | 18.9 | 0.3 |
| 70°-80° | 1.8 | 0.0 |
| 80°-90° | 1.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 3733.7 | 67.4 |
| 0°-40° | 5007.8 | 90.3 |
| 0°-60° | 5521.3 | 99.6 |
| 0°-90° | 5543.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 5543.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 6114 | |
| 5° | 6013 | 560 |
| 15° | 4998 | 1403 |
| 25° | 3912 | 1771 |
| 35° | 2053 | 1274 |
| 45° | 495 | 422 |
| 55° | 90 | 92 |
| 65° | 17 | 19 |
| 75° | 1 | 2 |
| 85° | 0 | 1 |
| 90° | 0 | |



TEST NUMBER: P247326

CATALOG NUMBER: LSR8B80D010 EC8B809727 8LBM0WMH

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 6114.5 |
| 1° | 6123.1 |
| 2° | 6115.9 |
| 3° | 6095.8 |
| 4° | 6058.3 |
| 5° | 6012.7 |
| 6° | 5950.2 |
| 7° | 5868.8 |
| 8° | 5778.9 |
| 9° | 5680.6 |
| 10° | 5572.6 |
| 11° | 5462.2 |
| 12° | 5342.1 |
| 13° | 5226.3 |
| 14° | 5109.8 |
| 15° | 4998.1 |
| 16° | 4888.1 |
| 17° | 4782.6 |
| 18° | 4678.0 |
| 19° | 4577.5 |
| 20° | 4476.3 |
| 21° | 4372.6 |
| 22° | 4271.3 |
| 23° | 4161.2 |
| 24° | 4042.4 |
| 25° | 3911.9 |
| 26° | 3774.9 |
| 27° | 3622.4 |
| 28° | 3461.1 |
| 29° | 3281.9 |
| 30° | 3095.2 |
| 31° | 2898.8 |
| 32° | 2692.1 |
| 33° | 2475.3 |
| 34° | 2263.2 |
| 35° | 2053.2 |
| 37.5° | 1541.9 |
| 40° | 1092.6 |
| 42.5° | 740.2 |
| 45° | 495.0 |
| 47.5° | 332.1 |
| 50° | 221.9 |
| 52.5° | 134.0 |
| 55° | 89.9 |
| 57.5° | 62.5 |



TEST NUMBER: P247326

CATALOG NUMBER: LSR8B80D010 EC8B809727 8LBM0WMH

CANDELA DISTRIBUTION (continued):

| | 0° |
|-------|------|
| 60° | 37.1 |
| 62.5° | 25.4 |
| 65° | 17.0 |
| 67.5° | 15.2 |
| 70° | 1.4 |
| 72.5° | 3.5 |
| 75° | 1.4 |
| 77.5° | 1.4 |
| 80° | 0.0 |
| 82.5° | 3.5 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)