

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250555

Luminaire Tested: **LSR8B90D010 EC8B90835 8LBM0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250555
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13928)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B90D010 EC8B90835 8LBM0B
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3500 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6010.0 lumens
Efficiency: N/A
Efficacy: 69.8 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.87
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 86.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250555

CATALOG NUMBER: LSR8B90D010 EC8B90835 8LBM0B

Luminous Intensity Polar Plot

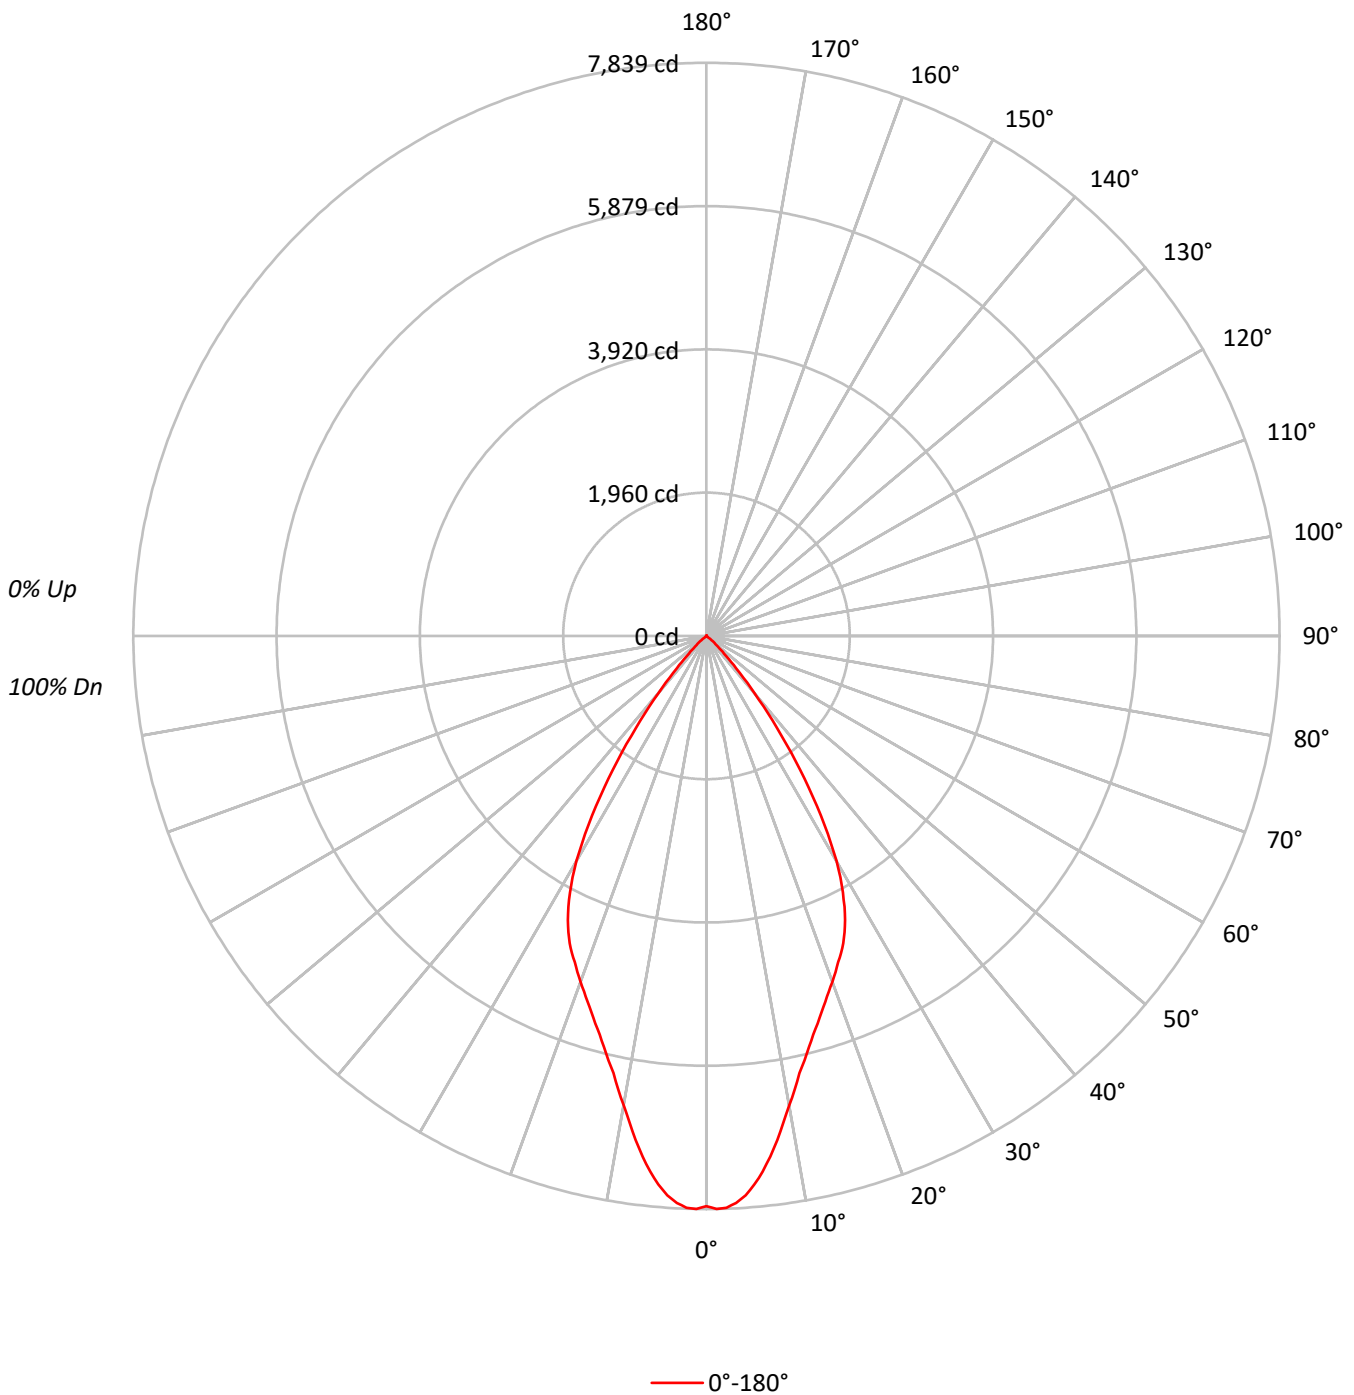



TEST NUMBER: P250555

CATALOG NUMBER: LSR8B90D010 EC8B90835 8LBM0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86		90	87	84		88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79		85	81	78		83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74		80	76	73		79	75	72	71
6	88	79	74	69	87	79	73	69	77	72	69		76	71	68		74	71	68	66
7	84	75	69	65	83	74	68	64	73	68	64		72	67	64		70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60		68	63	60		67	63	60	58
9	76	66	61	57	75	66	60	57	65	60	56		64	60	56		63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53		61	56	53		60	56	53	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	240468
5°	233115
10°	204161
15°	180247
20°	165166
25°	152081
30°	126578
35°	84075
40°	40918
45°	14818
50°	4461
55°	312
60°	0
65°	212
70°	0
75°	0
80°	515
85°	0



TEST NUMBER: P250555

CATALOG NUMBER: LSR8B90D010 EC8B90835 8LBM0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	684.9	11.4
10°-20°	1590.7	26.5
20°-30°	2018.0	33.6
30°-40°	1382.5	23.0
40°-50°	315.1	5.2
50°-60°	15.7	0.3
60°-70°	0.7	0.0
70°-80°	1.1	0.0
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4293.7	71.4
0°-40°	5676.2	94.4
0°-60°	6006.9	99.9
0°-90°	6010.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6010.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7798	
5°	7531	685
15°	5646	1591
25°	4470	2018
35°	2233	1383
45°	340	315
55°	6	16
65°	3	1
75°	0	1
85°	0	1
90°	0	



TEST NUMBER: P250555

CATALOG NUMBER: LSR8B90D010 EC8B90835 8LBM0B

CANDELA DISTRIBUTION (FULL):

0°	
0°	7798.2
1°	7838.8
2°	7824.3
3°	7766.2
4°	7667.4
5°	7531.0
6°	7365.4
7°	7173.7
8°	6961.7
9°	6735.1
10°	6520.2
11°	6322.7
12°	6110.8
13°	5956.8
14°	5794.2
15°	5646.1
16°	5512.5
17°	5381.7
18°	5259.8
19°	5140.7
20°	5033.2
21°	4922.8
22°	4809.6
23°	4710.9
24°	4600.5
25°	4469.8
26°	4324.6
27°	4156.1
28°	3976.1
29°	3775.7
30°	3554.9
31°	3305.1
32°	3046.7
33°	2776.6
34°	2500.6
35°	2233.4
37.5°	1577.1
40°	1016.5
42.5°	598.3
45°	339.8
47.5°	183.0
50°	93.0
52.5°	17.4
55°	5.8
57.5°	2.9



TEST NUMBER: P250555

CATALOG NUMBER: LSR8B90D010 EC8B90835 8LBM0B

CANDELA DISTRIBUTION (continued):

	0°
60°	0.0
62.5°	0.0
65°	2.9
67.5°	0.0
70°	0.0
72.5°	2.9
75°	0.0
77.5°	0.0
80°	2.9
82.5°	0.0
85°	0.0
87.5°	2.9
90°	0.0

(END OF REPORT)