

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P249862

Luminaire Tested: **LSR8B90D010 EC8B90930 8LBN0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P249862  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13959)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B90D010 EC8B90930 8LBN0H  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 3000 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7010.8 lumens  
Efficiency: N/A  
Efficacy: 81.4 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.81  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 86.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P249862

CATALOG NUMBER: LSR8B90D010 EC8B90930 8LBN0H

### Luminous Intensity Polar Plot

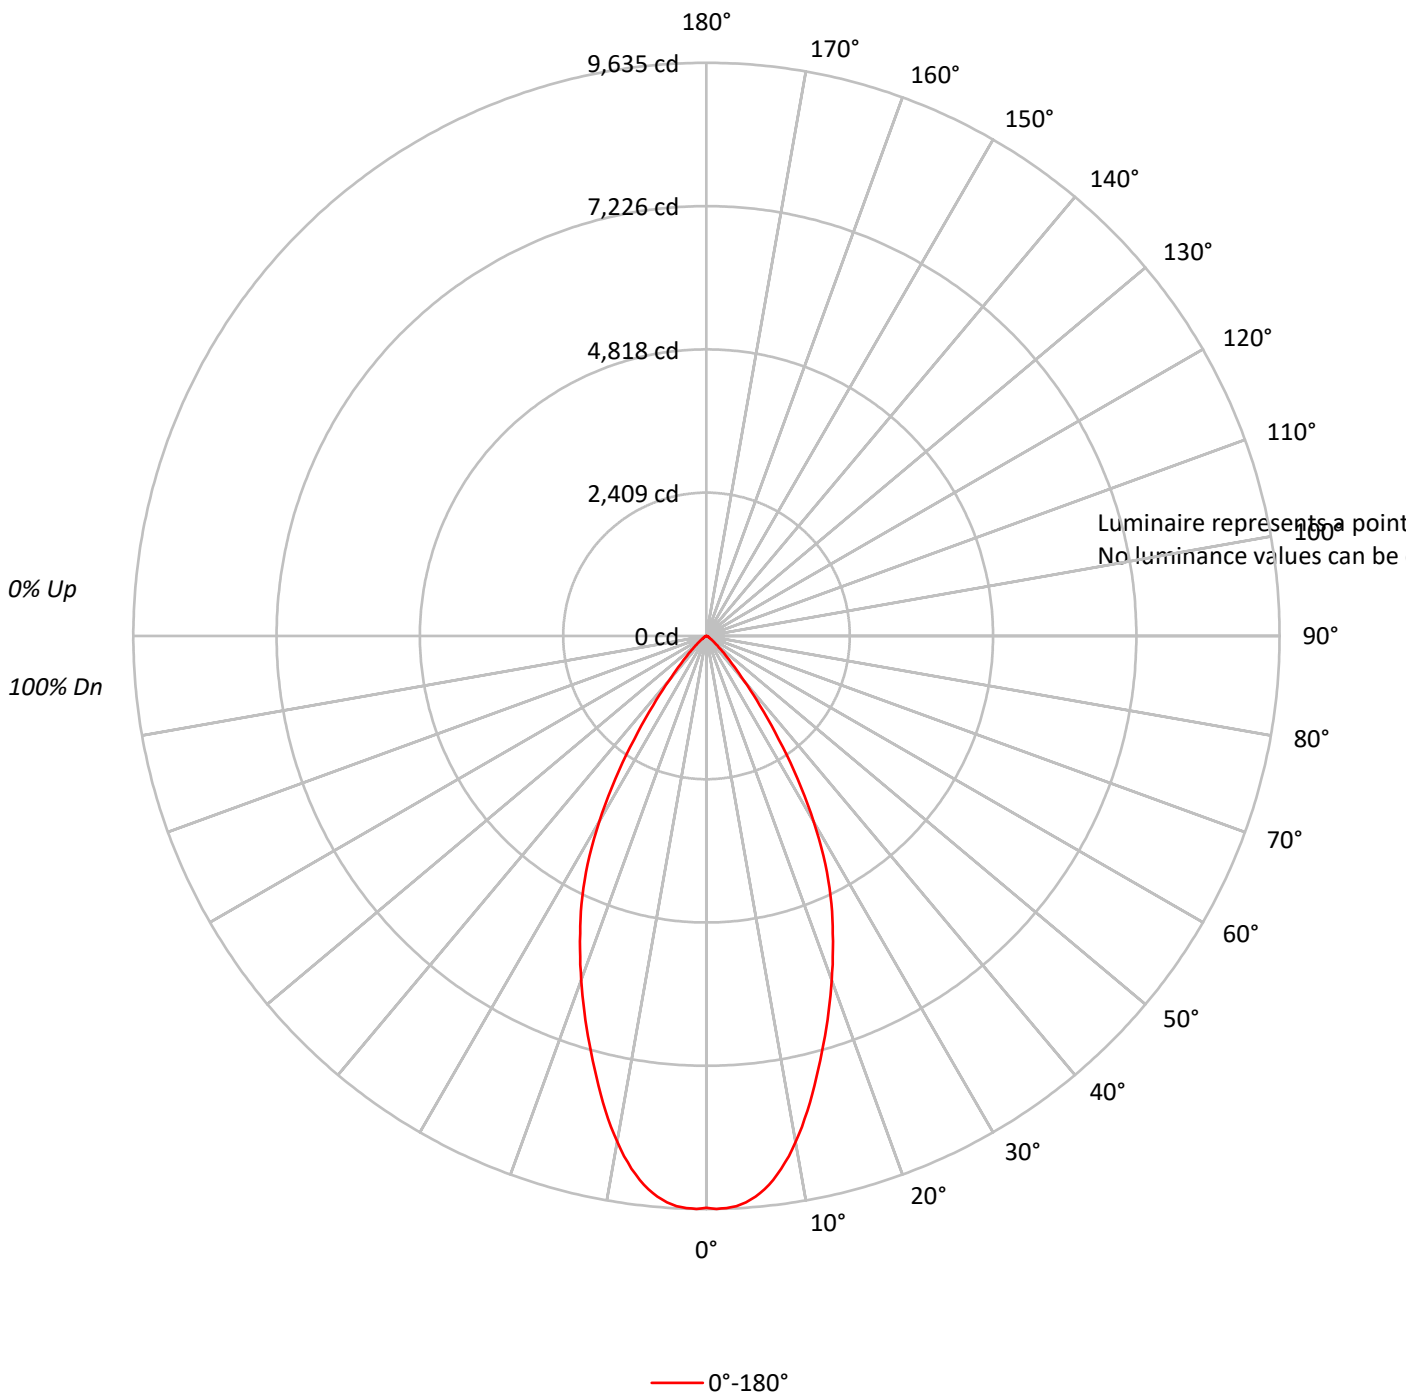



TEST NUMBER: P249862

CATALOG NUMBER: LSR8B90D010 EC8B90930 8LBN0H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	103	100	96	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86		90	87	85		88	85	83	82
4	98	91	85	81	96	89	84	81	87	83	80		85	82	79		83	80	78	76
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79	76	73	71
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75	71	68	67
7	84	75	70	66	83	75	69	65	74	69	65		72	68	65		71	67	64	63
8	81	71	65	62	79	71	65	61	70	65	61		69	64	61		68	64	61	59
9	77	68	62	58	76	67	62	58	66	61	58		65	61	57		64	60	57	56
10	73	64	58	55	72	64	58	55	63	58	54		62	57	54		61	57	54	53

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P249862

CATALOG NUMBER: LSR8B90D010 EC8B90930 8LBN0H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	876.8	12.5
10°-20°	2058.6	29.4
20°-30°	2249.9	32.1
30°-40°	1338.9	19.1
40°-50°	367.3	5.2
50°-60°	83.2	1.2
60°-70°	25.7	0.4
70°-80°	7.8	0.1
80°-90°	2.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5185.3	74.0
0°-40°	6524.2	93.1
0°-60°	6974.7	99.5
0°-90°	7010.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7010.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9616	
5°	9462	877
15°	7388	2059
25°	4970	2250
35°	2119	1339
45°	430	367
55°	83	83
65°	26	26
75°	7	8
85°	2	3
90°	0	



TEST NUMBER: P249862

CATALOG NUMBER: LSR8B90D010 EC8B90930 8LBN0H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	9615.7
1°	9634.7
2°	9622.8
3°	9599.1
4°	9544.5
5°	9461.5
6°	9354.7
7°	9212.4
8°	9046.2
9°	8854.1
10°	8638.2
11°	8408.1
12°	8161.3
13°	7907.5
14°	7644.1
15°	7388.0
16°	7136.4
17°	6889.7
18°	6642.9
19°	6396.2
20°	6156.6
22.5°	5554.0
25°	4970.4
27.5°	4327.4
30°	3613.3
32.5°	2847.0
35°	2118.6
37.5°	1473.3
40°	977.5
42.5°	640.5
45°	429.5
47.5°	284.7
50°	189.8
52.5°	116.2
55°	83.1
57.5°	59.3
60°	45.1
62.5°	33.2
65°	26.1
67.5°	16.6
70°	11.9
72.5°	9.5
75°	7.1
77.5°	4.7
80°	4.7



TEST NUMBER: P249862

CATALOG NUMBER: LSR8B90D010 EC8B90930 8LBN0H

**CANDELA DISTRIBUTION (continued):**

	0°
82.5°	2.4
85°	2.4
87.5°	2.4
90°	0.0

(END OF REPORT)