

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247083

Luminaire Tested: **LSR8B90D010 EC8B90950 8LBW0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P247083
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P25264)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B90D010 EC8B90950 8LBW0LI
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 5000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9259.1 lumens
Efficiency: N/A
Efficacy: 107.5 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.22
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 86.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P247083

CATALOG NUMBER: LSR8B90D010 EC8B90950 8LBW0LI

Luminous Intensity Polar Plot

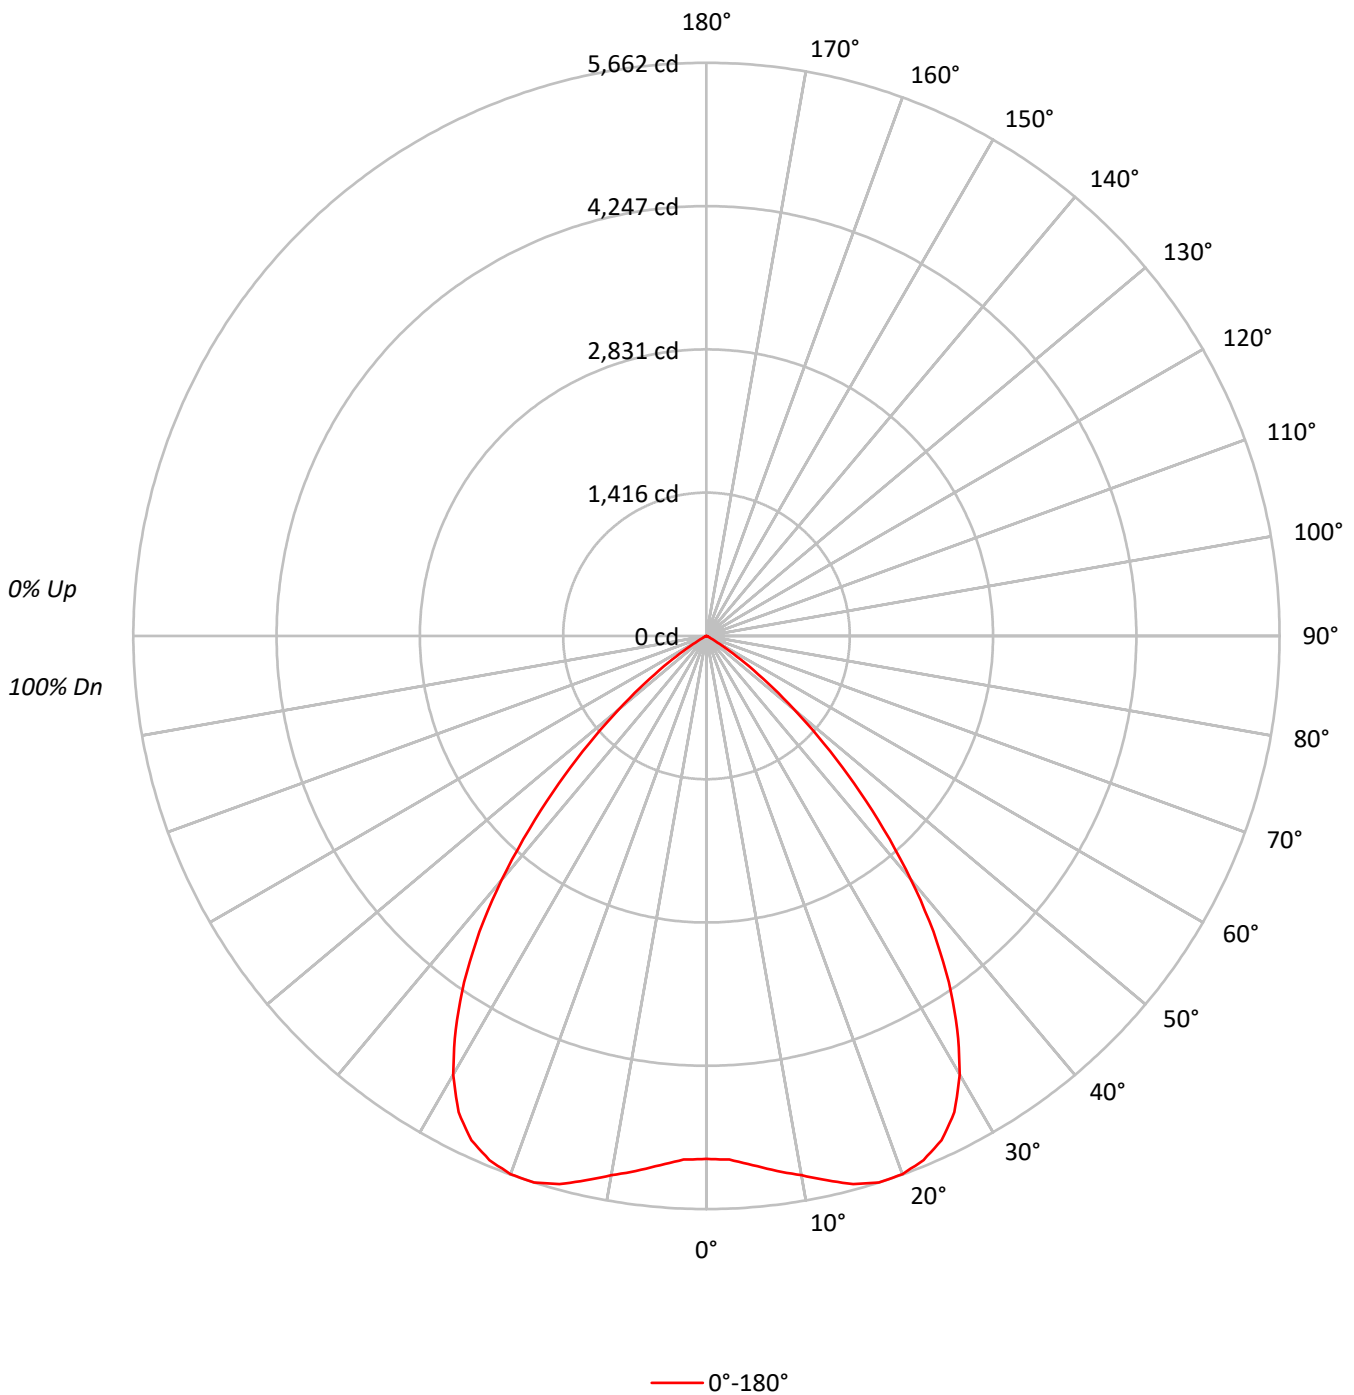



TEST NUMBER: P247083

CATALOG NUMBER: LSR8B90D010 EC8B90950 8LBW0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	94	92
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75
4	93	84	78	73	91	83	77	72	81	75	71	79	74	70	77	73	70	68
5	87	77	70	65	85	76	70	65	74	69	64	73	68	64	71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56
7	77	66	59	54	75	65	58	54	64	58	53	62	57	53	61	56	53	51
8	72	61	54	49	71	60	54	49	59	53	49	58	52	48	57	52	48	47
9	68	56	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	159322
5°	162432
10°	169398
15°	178970
20°	185676
25°	187027
30°	178183
35°	157168
40°	126699
45°	89953
50°	54061
55°	24354
60°	6278
65°	1357
70°	667
75°	453
80°	231
85°	0



TEST NUMBER: P247083

CATALOG NUMBER: LSR8B90D010 EC8B90950 8LBW0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	506.2	5.5
10°-20°	1585.0	17.1
20°-30°	2506.5	27.1
30°-40°	2575.5	27.8
40°-50°	1597.6	17.3
50°-60°	452.9	4.9
60°-70°	30.6	0.3
70°-80°	4.1	0.0
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4597.7	49.7
0°-40°	7173.2	77.5
0°-60°	9223.8	99.6
0°-90°	9259.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9259.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5167	
5°	5248	506
15°	5606	1585
25°	5497	2507
35°	4175	2576
45°	2063	1598
55°	453	453
65°	19	31
75°	4	4
85°	0	1
90°	0	



TEST NUMBER: P247083

CATALOG NUMBER: LSR8B90D010 EC8B90950 8LBW0LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	5166.7
2.5°	5176.6
5°	5247.5
7.5°	5330.6
10°	5410.0
12.5°	5508.0
15°	5606.1
17.5°	5661.9
20°	5658.2
22.5°	5603.6
25°	5496.9
27.5°	5303.3
30°	5004.2
32.5°	4610.7
35°	4175.1
37.5°	3682.4
40°	3147.5
42.5°	2591.4
45°	2062.7
47.5°	1571.3
50°	1126.9
52.5°	758.4
55°	453.0
57.5°	233.4
60°	101.8
62.5°	41.0
65°	18.6
67.5°	11.2
70°	7.4
72.5°	5.0
75°	3.8
77.5°	2.5
80°	1.3
82.5°	1.3
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)