

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244668

Luminaire Tested: **LD8B10D010 ER8B10830 8LBW0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244668
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B10D010 ER8B10830 8LBW0WMH
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT
80 CRI 3000 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1060.0 lumens
Efficiency: N/A
Efficacy: 103.9 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 10.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244668

CATALOG NUMBER: LD8B10D010 ER8B10830 8LBW0WMH

Luminous Intensity Polar Plot

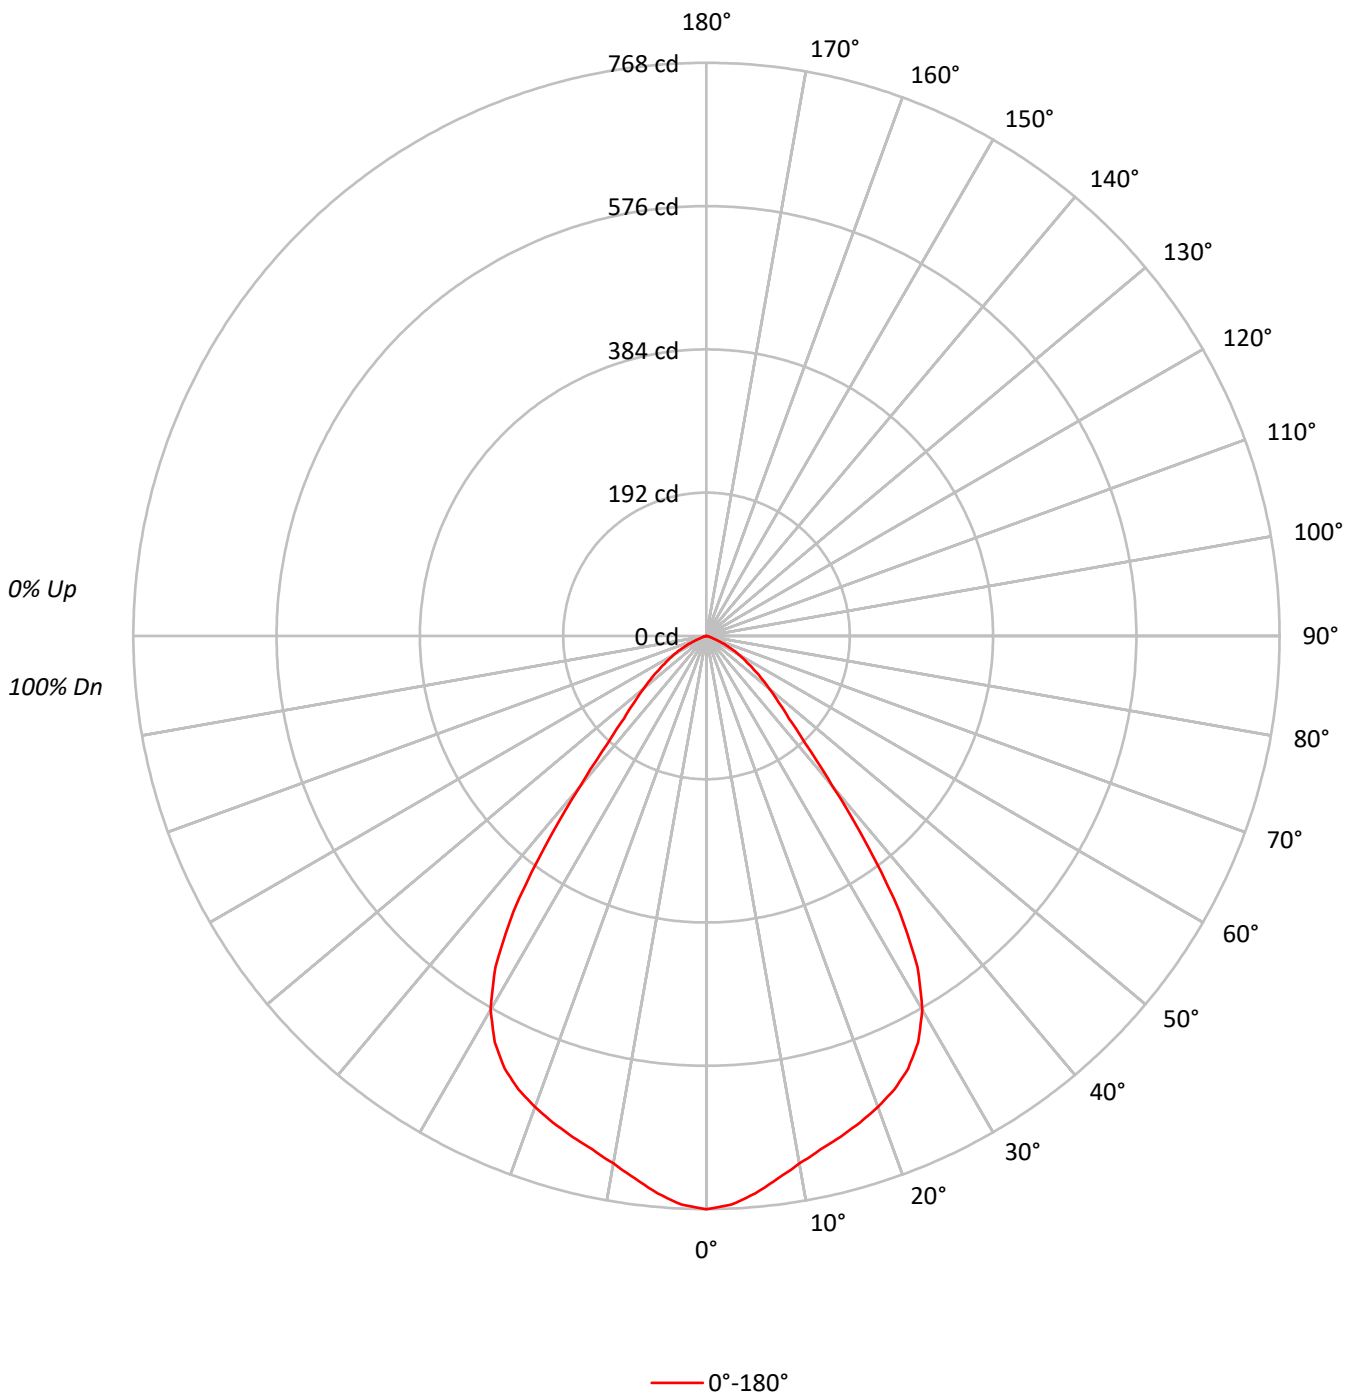



TEST NUMBER: P244668

CATALOG NUMBER: LD8B10D010 ER8B10830 8LBW0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89	87	84	83
3	99	91	86	81	97	90	85	80	87	83	79		85	81	78		82	79	76	75
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	73	69	68
5	87	77	70	65	85	76	70	65	74	69	64		73	68	64		71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59		67	62	58		66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61	57	53	51
8	72	61	54	50	71	61	54	50	60	54	49		58	53	49		57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46		55	49	45		54	49	45	44
10	65	54	47	42	63	53	47	42	52	46	42		51	46	42		51	46	42	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	23688
5°	23212
10°	22476
15°	22174
20°	22042
25°	21762
30°	20591
35°	16985
40°	10607
45°	6820
50°	5287
55°	4070
60°	3084
65°	2007
70°	857
75°	417
80°	195
85°	142



TEST NUMBER: P244668

CATALOG NUMBER: LD8B10D010 ER8B10830 8LBW0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.5	6.7
10°-20°	196.2	18.5
20°-30°	292.3	27.6
30°-40°	271.4	25.6
40°-50°	128.2	12.1
50°-60°	68.9	6.5
60°-70°	27.7	2.6
70°-80°	4.3	0.4
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	559.0	52.7
0°-40°	830.5	78.3
0°-60°	1027.5	96.9
0°-90°	1060.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1060.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	768	
5°	750	71
15°	695	196
25°	640	292
35°	451	271
45°	156	128
55°	76	69
65°	28	28
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P244668

CATALOG NUMBER: LD8B10D010 ER8B10830 8LBW0WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	768.2
2.5°	762.9
5°	749.9
7.5°	733.3
10°	717.8
12.5°	705.1
15°	694.6
17.5°	683.7
20°	671.7
22.5°	657.9
25°	639.6
27.5°	613.9
30°	578.3
32.5°	526.2
35°	451.2
37.5°	355.4
40°	263.5
42.5°	196.2
45°	156.4
47.5°	130.7
50°	110.2
52.5°	91.9
55°	75.7
57.5°	61.6
60°	50.0
62.5°	39.1
65°	27.5
67.5°	16.2
70°	9.5
72.5°	5.6
75°	3.5
77.5°	2.1
80°	1.1
82.5°	0.7
85°	0.4
87.5°	0.0
90°	0.0

(END OF REPORT)