

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244002

Luminaire Tested: **LD8B10D010 ER8B10927 8LBMOLI**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244002  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-11)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B10D010 ER8B10927 8LBM0LI  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT  
97 CRI 2700 CCT WITH SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 920.3 lumens  
Efficiency: N/A  
Efficacy: 90.2 lumens/watt  
Spacing Criteria (0/90/45): 0.63 / 0.63 / 0.72  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244002

CATALOG NUMBER: LD8B10D010 ER8B10927 8LBM0LI

### Luminous Intensity Polar Plot

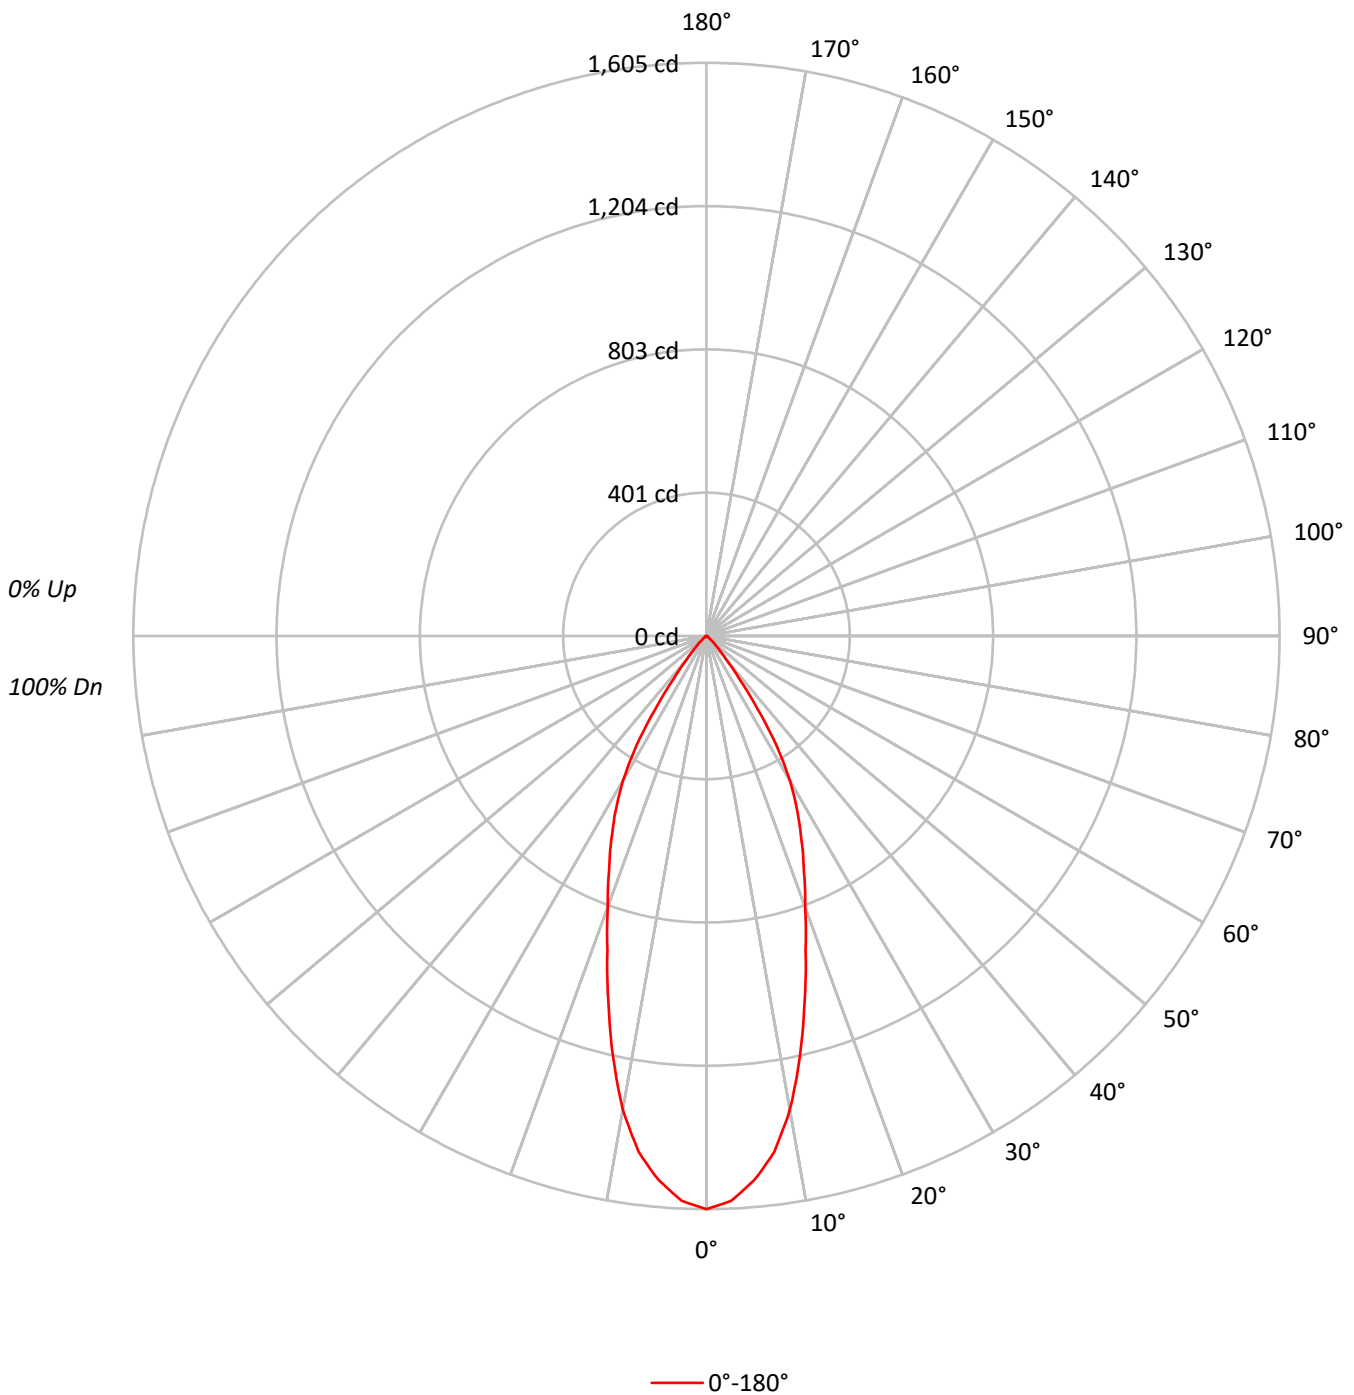



TEST NUMBER: P244002

CATALOG NUMBER: LD8B10D010 ER8B10927 8LBM0LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  | 0   |     |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 | 100 |
| 1   | 114 | 111 | 109 | 107 | 111 | 109 | 107 | 105 | 105 | 104 | 102 |  | 101 | 100 | 99  |  | 98  | 97  | 96  | 94  |
| 2   | 109 | 104 | 101 | 97  | 107 | 103 | 99  | 96  | 99  | 97  | 94  |  | 96  | 94  | 92  |  | 94  | 92  | 90  | 89  |
| 3   | 104 | 98  | 93  | 90  | 102 | 97  | 92  | 89  | 94  | 90  | 88  |  | 92  | 89  | 86  |  | 89  | 87  | 85  | 83  |
| 4   | 99  | 92  | 87  | 83  | 97  | 91  | 86  | 83  | 89  | 85  | 82  |  | 87  | 84  | 81  |  | 85  | 82  | 80  | 78  |
| 5   | 95  | 87  | 82  | 78  | 93  | 86  | 81  | 77  | 84  | 80  | 77  |  | 83  | 79  | 76  |  | 81  | 78  | 75  | 74  |
| 6   | 90  | 82  | 77  | 73  | 89  | 81  | 76  | 73  | 80  | 75  | 72  |  | 79  | 75  | 72  |  | 77  | 74  | 71  | 70  |
| 7   | 86  | 78  | 72  | 69  | 85  | 77  | 72  | 68  | 76  | 71  | 68  |  | 75  | 71  | 68  |  | 74  | 70  | 67  | 66  |
| 8   | 83  | 74  | 68  | 65  | 82  | 73  | 68  | 65  | 72  | 68  | 64  |  | 71  | 67  | 64  |  | 70  | 67  | 64  | 62  |
| 9   | 79  | 70  | 65  | 61  | 78  | 70  | 65  | 61  | 69  | 64  | 61  |  | 68  | 64  | 61  |  | 67  | 63  | 60  | 59  |
| 10  | 76  | 67  | 62  | 58  | 75  | 67  | 61  | 58  | 66  | 61  | 58  |  | 65  | 61  | 58  |  | 64  | 60  | 58  | 56  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 49505 |
| 5°  | 47378 |
| 10° | 42177 |
| 15° | 33881 |
| 20° | 26534 |
| 25° | 21428 |
| 30° | 16603 |
| 35° | 9456  |
| 40° | 3566  |
| 45° | 1539  |
| 50° | 619   |
| 55° | 231   |
| 60° | 123   |
| 65° | 80    |
| 70° | 54    |
| 75° | 36    |
| 80° | 0     |
| 85° | 0     |



TEST NUMBER: P244002

CATALOG NUMBER: LD8B10D010 ER8B10927 8LBM0LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 140.5  | 15.3      |
| 10°-20°   | 294.7  | 32.0      |
| 20°-30°   | 288.4  | 31.3      |
| 30°-40°   | 159.5  | 17.3      |
| 40°-50°   | 30.9   | 3.4       |
| 50°-60°   | 4.7    | 0.5       |
| 60°-70°   | 1.2    | 0.1       |
| 70°-80°   | 0.3    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 723.6  | 78.6      |
| 0°-40°    | 883.1  | 96.0      |
| 0°-60°    | 918.8  | 99.8      |
| 0°-90°    | 920.3  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 920.3  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1605 |      |
| 5°  | 1531 | 140  |
| 15° | 1061 | 295  |
| 25° | 630  | 288  |
| 35° | 251  | 160  |
| 45° | 35   | 31   |
| 55° | 4    | 5    |
| 65° | 1    | 1    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P244002

CATALOG NUMBER: LD8B10D010 ER8B10927 8LBM0LI

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1605.4 |
| 2.5°  | 1583.3 |
| 5°    | 1530.6 |
| 7.5°  | 1456.5 |
| 10°   | 1347.0 |
| 12.5° | 1208.5 |
| 15°   | 1061.3 |
| 17.5° | 923.4  |
| 20°   | 808.6  |
| 22.5° | 713.8  |
| 25°   | 629.8  |
| 27.5° | 550.6  |
| 30°   | 466.3  |
| 32.5° | 367.3  |
| 35°   | 251.2  |
| 37.5° | 151.1  |
| 40°   | 88.6   |
| 42.5° | 55.4   |
| 45°   | 35.3   |
| 47.5° | 22.0   |
| 50°   | 12.9   |
| 52.5° | 7.2    |
| 55°   | 4.3    |
| 57.5° | 2.6    |
| 60°   | 2.0    |
| 62.5° | 1.5    |
| 65°   | 1.1    |
| 67.5° | 0.9    |
| 70°   | 0.6    |
| 72.5° | 0.3    |
| 75°   | 0.3    |
| 77.5° | 0.3    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)