

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246600

Luminaire Tested: **LD8B10D010 ER8B109730 8LBW0MW**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246600  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-48)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B10D010 ER8B109730 8LBW0MW  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
97 CRI 3000 CCT WITH MATTE WHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 852.1 lumens  
Efficiency: N/A  
Efficacy: 83.5 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 10.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246600

CATALOG NUMBER: LD8B10D010 ER8B109730 8LBW0MW

### Luminous Intensity Polar Plot

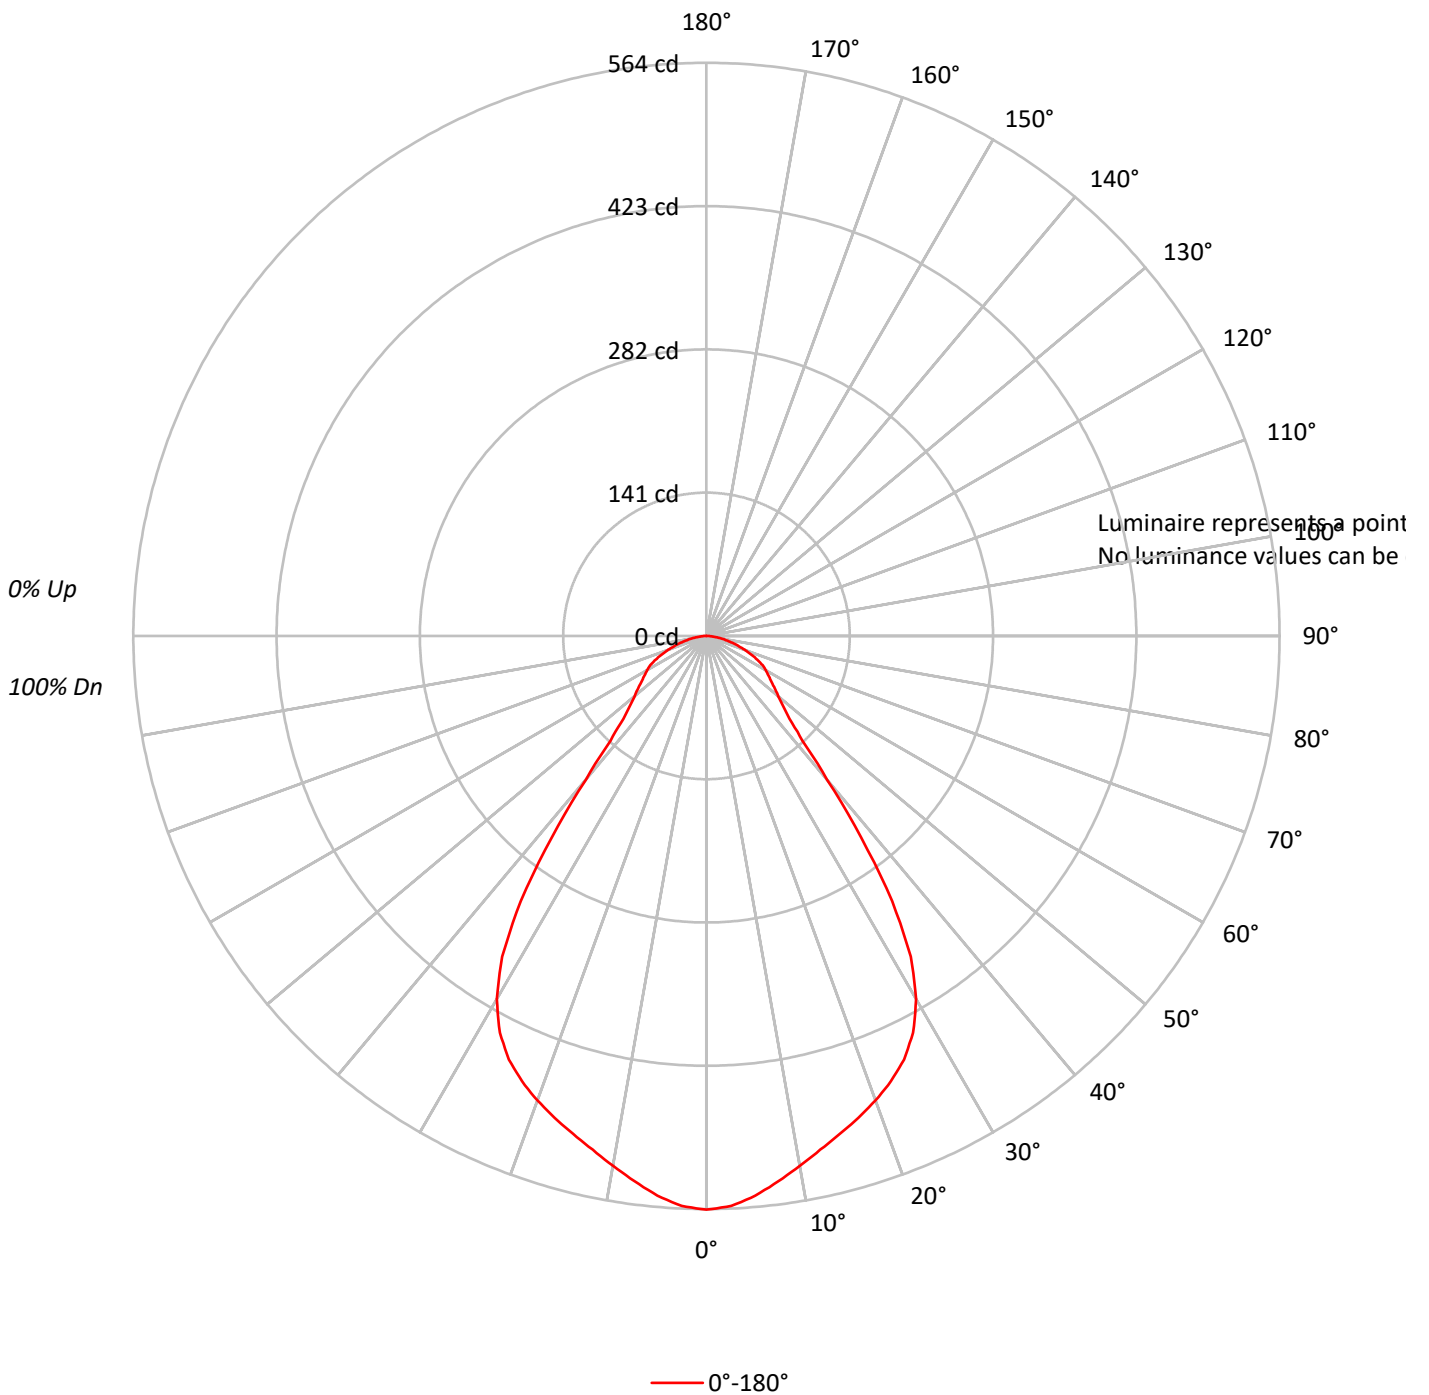



TEST NUMBER: P246600

CATALOG NUMBER: LD8B10D010 ER8B109730 8LBW0MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89
2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	86	83	80	78
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	72	70
4	90	80	73	67	88	79	72	67	76	70	66	74	69	65	72	68	64	62
5	84	73	66	60	82	72	65	60	70	64	59	68	63	59	67	62	58	56
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51
7	74	62	55	49	72	61	54	49	60	54	49	59	53	49	57	52	48	47
8	69	58	50	45	68	57	50	45	56	50	45	55	49	45	54	48	45	43
9	65	54	47	42	64	53	46	42	52	46	41	51	45	41	50	45	41	40
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P246600

CATALOG NUMBER: LD8B10D010 ER8B109730 8LBW0MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	52.0	6.1
10°-20°	143.3	16.8
20°-30°	210.1	24.7
30°-40°	192.0	22.5
40°-50°	95.1	11.2
50°-60°	70.3	8.3
60°-70°	54.1	6.3
70°-80°	28.2	3.3
80°-90°	7.0	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	405.4	47.6
0°-40°	597.4	70.1
0°-60°	762.8	89.5
0°-90°	852.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	852.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	564	
5°	553	52
15°	507	143
25°	460	210
35°	319	192
45°	115	95
55°	78	70
65°	55	54
75°	26	28
85°	6	7
90°	0	



TEST NUMBER: P246600

CATALOG NUMBER: LD8B10D010 ER8B109730 8LBW0MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	564.5
2.5°	561.5
5°	552.9
7.5°	541.3
10°	529.4
12.5°	517.8
15°	507.2
17.5°	497.2
20°	486.4
22.5°	474.3
25°	459.9
27.5°	440.2
30°	412.6
32.5°	374.0
35°	318.6
37.5°	250.0
40°	184.6
42.5°	139.7
45°	115.4
47.5°	102.1
50°	92.4
52.5°	84.6
55°	77.8
57.5°	72.2
60°	67.3
62.5°	62.2
65°	55.1
67.5°	47.6
70°	40.0
72.5°	33.0
75°	26.2
77.5°	20.3
80°	14.9
82.5°	10.3
85°	5.9
87.5°	2.2
90°	0.0

(END OF REPORT)