

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247000

Luminaire Tested: **LD8B100D010 ER8B100827 8LBNOLI**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P247000  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-80)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B100D010 ER8B100827 8LBNOLI  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 2700 CCT WITH SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9714.0 lumens  
Efficiency: N/A  
Efficacy: 91.4 lumens/watt  
Spacing Criteria (0/90/45): 0.47 / 0.47 / 0.56  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 106.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P247000

CATALOG NUMBER: LD8B100D010 ER8B100827 8LBNOLI

### Luminous Intensity Polar Plot

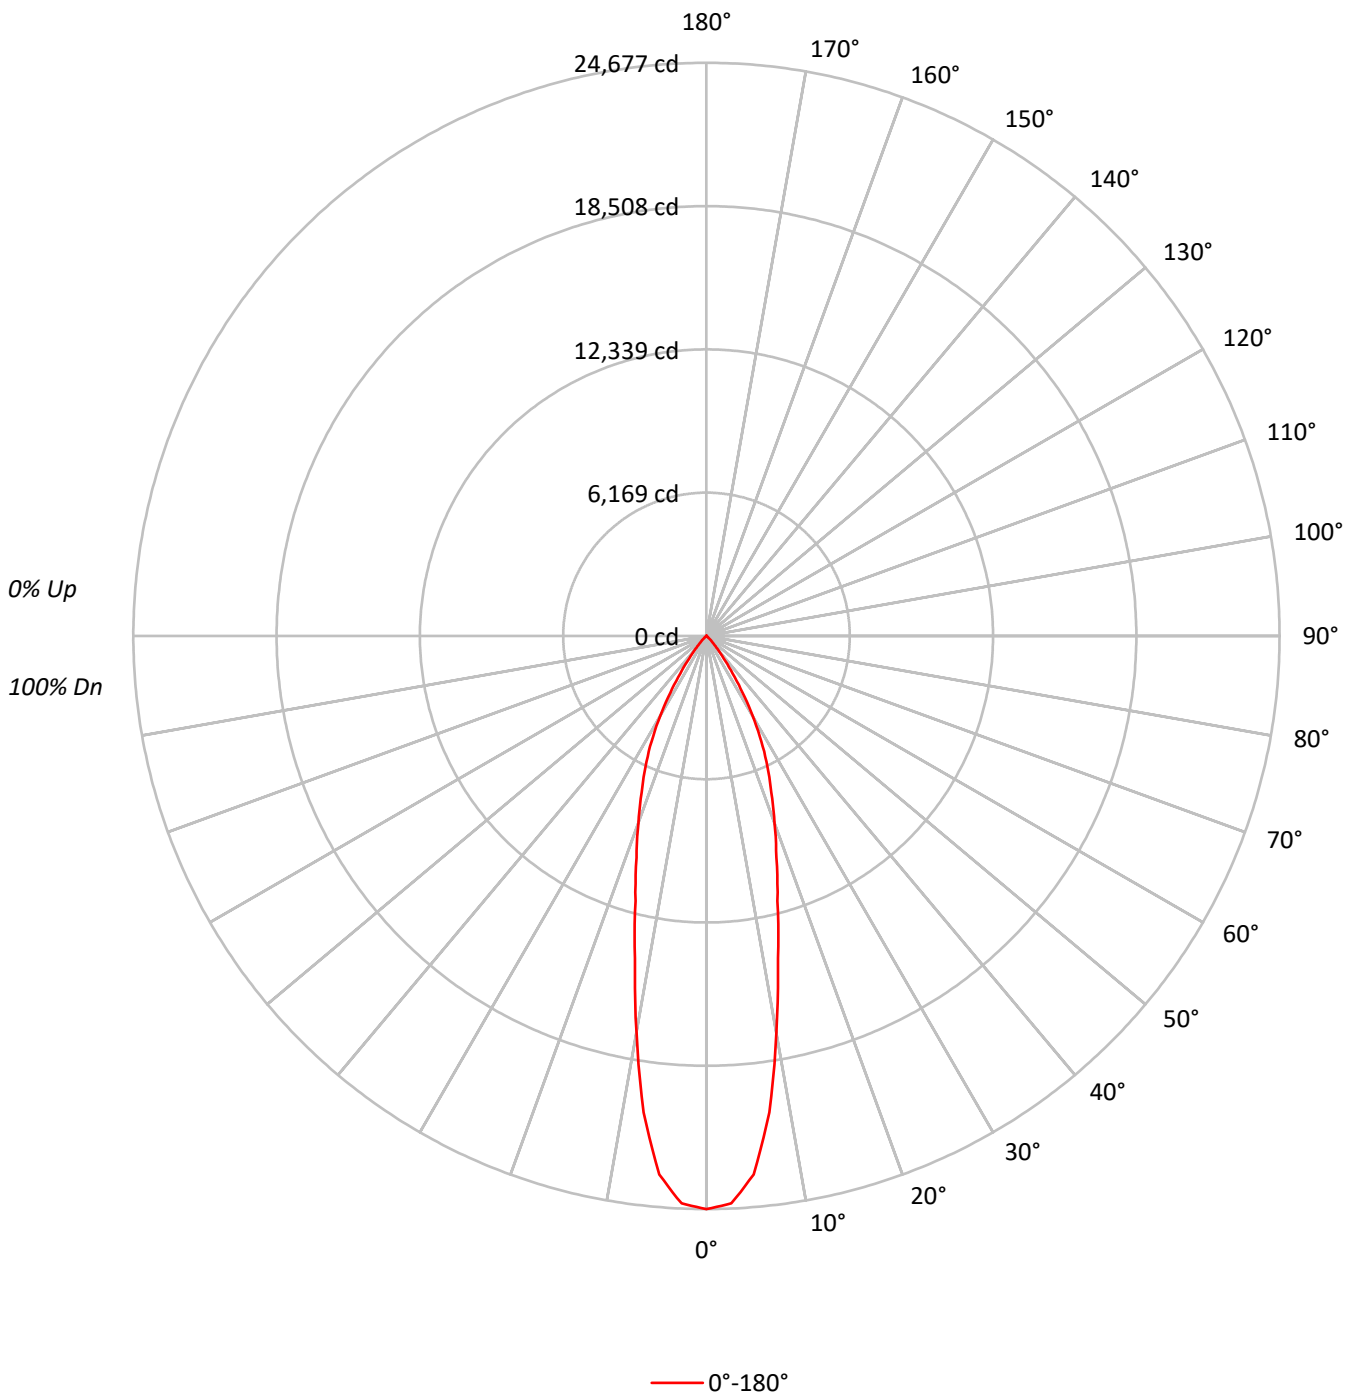



TEST NUMBER: P247000

CATALOG NUMBER: LD8B100D010 ER8B100827 8LBNOLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	105	102	99	107	104	100	98	100	98	96	98	95	94	95	93	92	90
3	105	100	95	92	103	98	94	91	96	92	90	93	91	88	91	89	87	85
4	101	94	90	86	99	93	89	85	91	87	84	89	86	83	87	85	83	81
5	97	90	85	81	95	89	84	80	87	83	80	85	82	79	84	81	78	77
6	93	85	80	76	91	84	80	76	83	79	76	82	78	75	80	77	75	73
7	89	81	76	72	88	81	76	72	79	75	72	78	74	72	77	74	71	70
8	86	78	72	69	85	77	72	69	76	72	69	75	71	68	74	71	68	67
9	82	74	69	66	81	74	69	66	73	69	65	72	68	65	71	68	65	64
10	79	71	66	63	79	71	66	63	70	66	63	69	65	62	69	65	62	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	760957
5°	720469
10°	542603
15°	377148
20°	281145
25°	211616
30°	141505
35°	74069
40°	28608
45°	10580
50°	2691
55°	527
60°	74
65°	270
70°	334
75°	0
80°	0
85°	425



TEST NUMBER: P247000

CATALOG NUMBER: LD8B100D010 ER8B100827 8LBNOLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2023.9	20.8
10°-20°	3347.1	34.5
20°-30°	2821.8	29.0
30°-40°	1280.4	13.2
40°-50°	223.5	2.3
50°-60°	12.2	0.1
60°-70°	1.8	0.0
70°-80°	2.1	0.0
80°-90°	1.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8192.7	84.3
0°-40°	9473.1	97.5
0°-60°	9708.8	99.9
0°-90°	9714.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9714.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	24677	
5°	23275	###
15°	11814	3347
25°	6220	2822
35°	1968	1280
45°	243	224
55°	10	12
65°	4	2
75°	0	2
85°	1	1
90°	0	



TEST NUMBER: P247000

CATALOG NUMBER: LD8B100D010 ER8B100827 8LBNOLI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	24677.3
2.5°	24459.1
5°	23275.4
7.5°	20697.1
10°	17328.9
12.5°	14215.4
15°	11813.9
17.5°	10009.7
20°	8567.5
22.5°	7298.5
25°	6219.6
27.5°	5122.5
30°	3974.1
32.5°	2892.8
35°	1967.6
37.5°	1208.1
40°	710.7
42.5°	416.9
45°	242.6
47.5°	145.1
50°	56.1
52.5°	8.5
55°	9.8
57.5°	8.5
60°	1.2
62.5°	1.2
65°	3.7
67.5°	0.0
70°	3.7
72.5°	6.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	1.2
87.5°	3.7
90°	0.0

(END OF REPORT)