

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250360

Luminaire Tested: **LD8B100D010 ER8B100927 8LBN0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250360
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13948)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B100D010 ER8B100927 8LBN0GPH
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT
97 CRI 2700 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6906.3 lumens
Efficiency: N/A
Efficacy: 65.0 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.77
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 106.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250360

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBN0GPH

Luminous Intensity Polar Plot

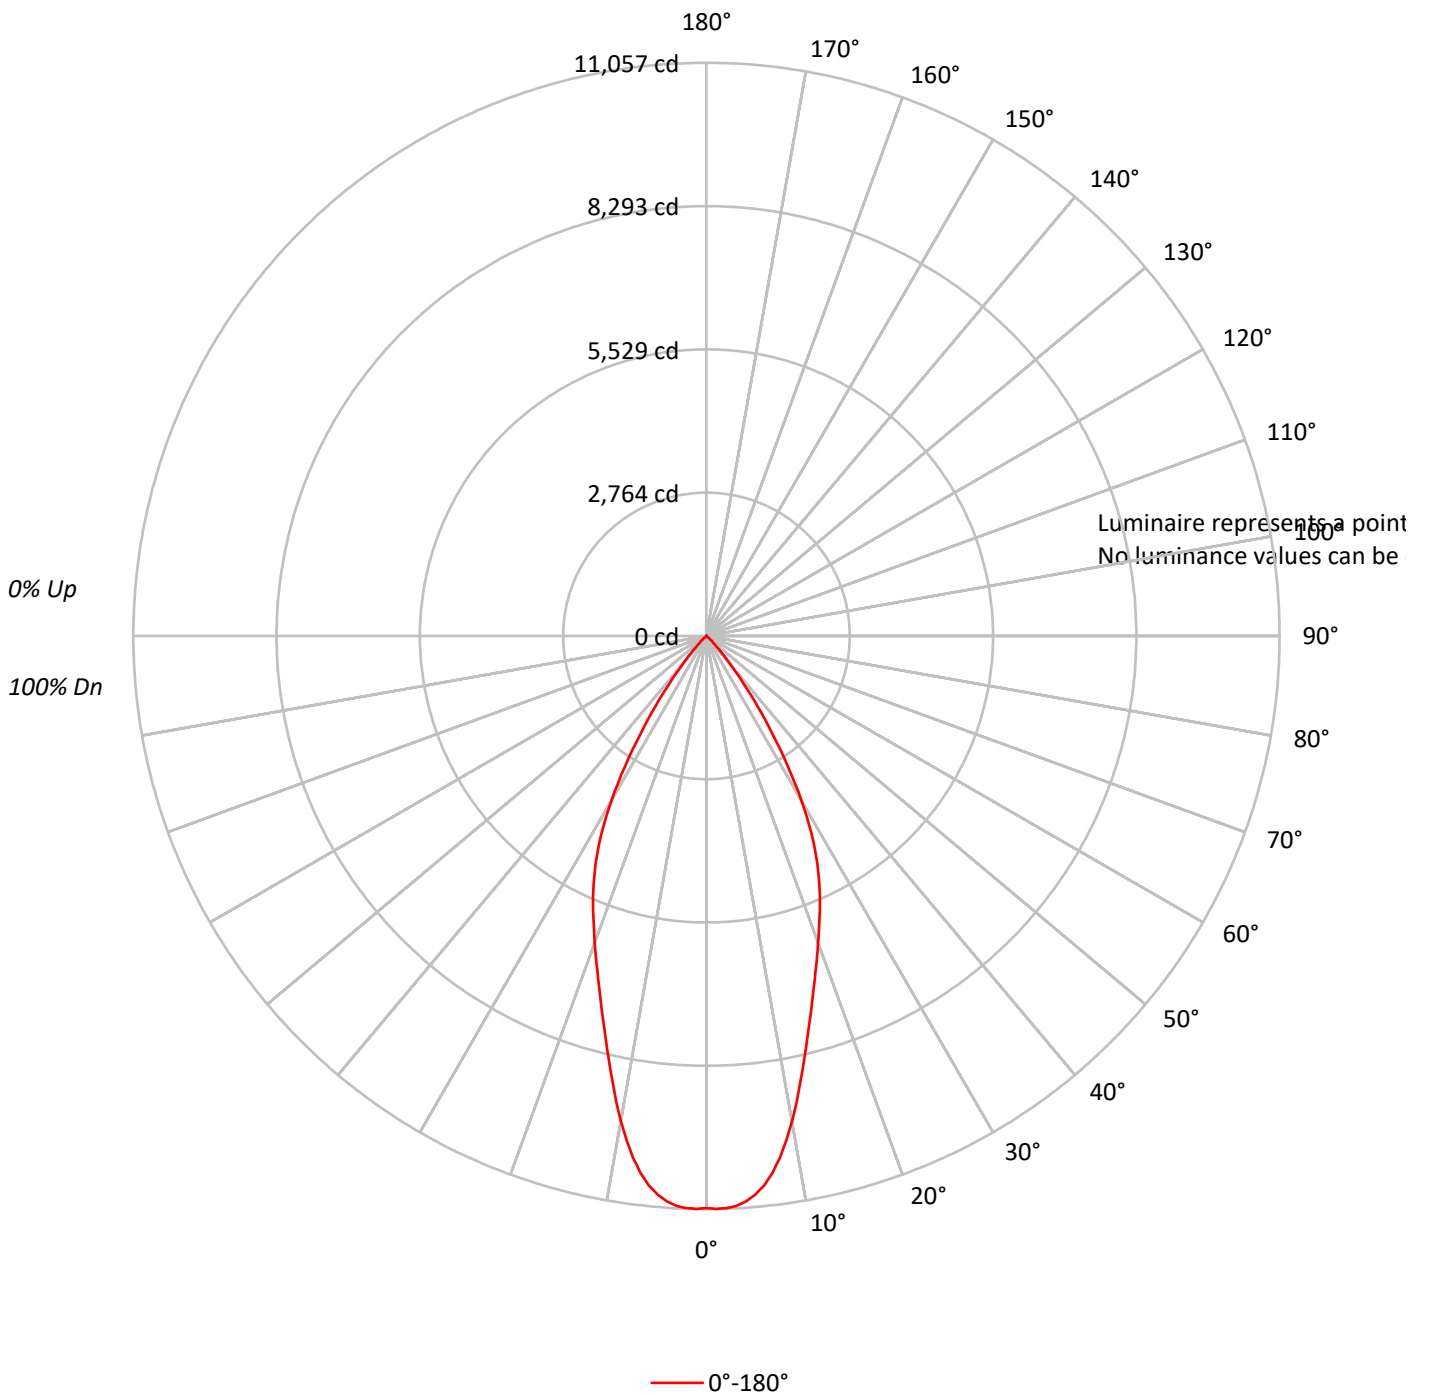



TEST NUMBER: P250360

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBN0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	90	82	77	73	89	81	76	72	80	75	72	79	75	71	77	74	71	70
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66
8	83	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P250360

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBN0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	990.7	14.3
10°-20°	2153.2	31.2
20°-30°	2311.6	33.5
30°-40°	1249.3	18.1
40°-50°	194.9	2.8
50°-60°	5.3	0.1
60°-70°	1.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5455.4	79.0
0°-40°	6704.8	97.1
0°-60°	6905.0	100.0
0°-90°	6906.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6906.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11036	
5°	10818	991
15°	7688	2153
25°	5124	2312
35°	1962	1249
45°	180	195
55°	0	5
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P250360

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBNOGPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	11035.7
1°	11056.6
2°	11046.3
3°	11008.5
4°	10935.8
5°	10818.0
6°	10656.0
7°	10438.0
8°	10165.1
9°	9850.9
10°	9501.8
11°	9135.4
12°	8755.3
13°	8375.6
14°	8022.8
15°	7687.8
16°	7380.2
17°	7083.1
18°	6806.6
19°	6547.8
20°	6298.9
21°	6056.9
22°	5828.6
23°	5601.0
24°	5362.5
25°	5123.9
26°	4882.0
27°	4605.8
28°	4301.6
29°	3991.0
30°	3666.0
31°	3317.1
32°	2967.9
33°	2622.4
34°	2273.5
35°	1962.4
37.5°	1254.1
40°	725.6
42.5°	387.1
45°	179.8
47.5°	97.0
50°	31.3
52.5°	3.5
55°	0.0
57.5°	3.5



TEST NUMBER: P250360

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBNOGPH

CANDELA DISTRIBUTION (continued):

	0°
60°	3.5
62.5°	0.0
65°	0.0
67.5°	3.5
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)