

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250696

Luminaire Tested: **LD8B100D010 ER8B100927 8LBN0MW**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250696
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P131425)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B100D010 ER8B100927 8LBN0MW
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT
97 CRI 2700 CCT WITH MATTE WHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7875.0 lumens
Efficiency: N/A
Efficacy: 74.1 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 106.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250696

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBN0MW

Luminous Intensity Polar Plot

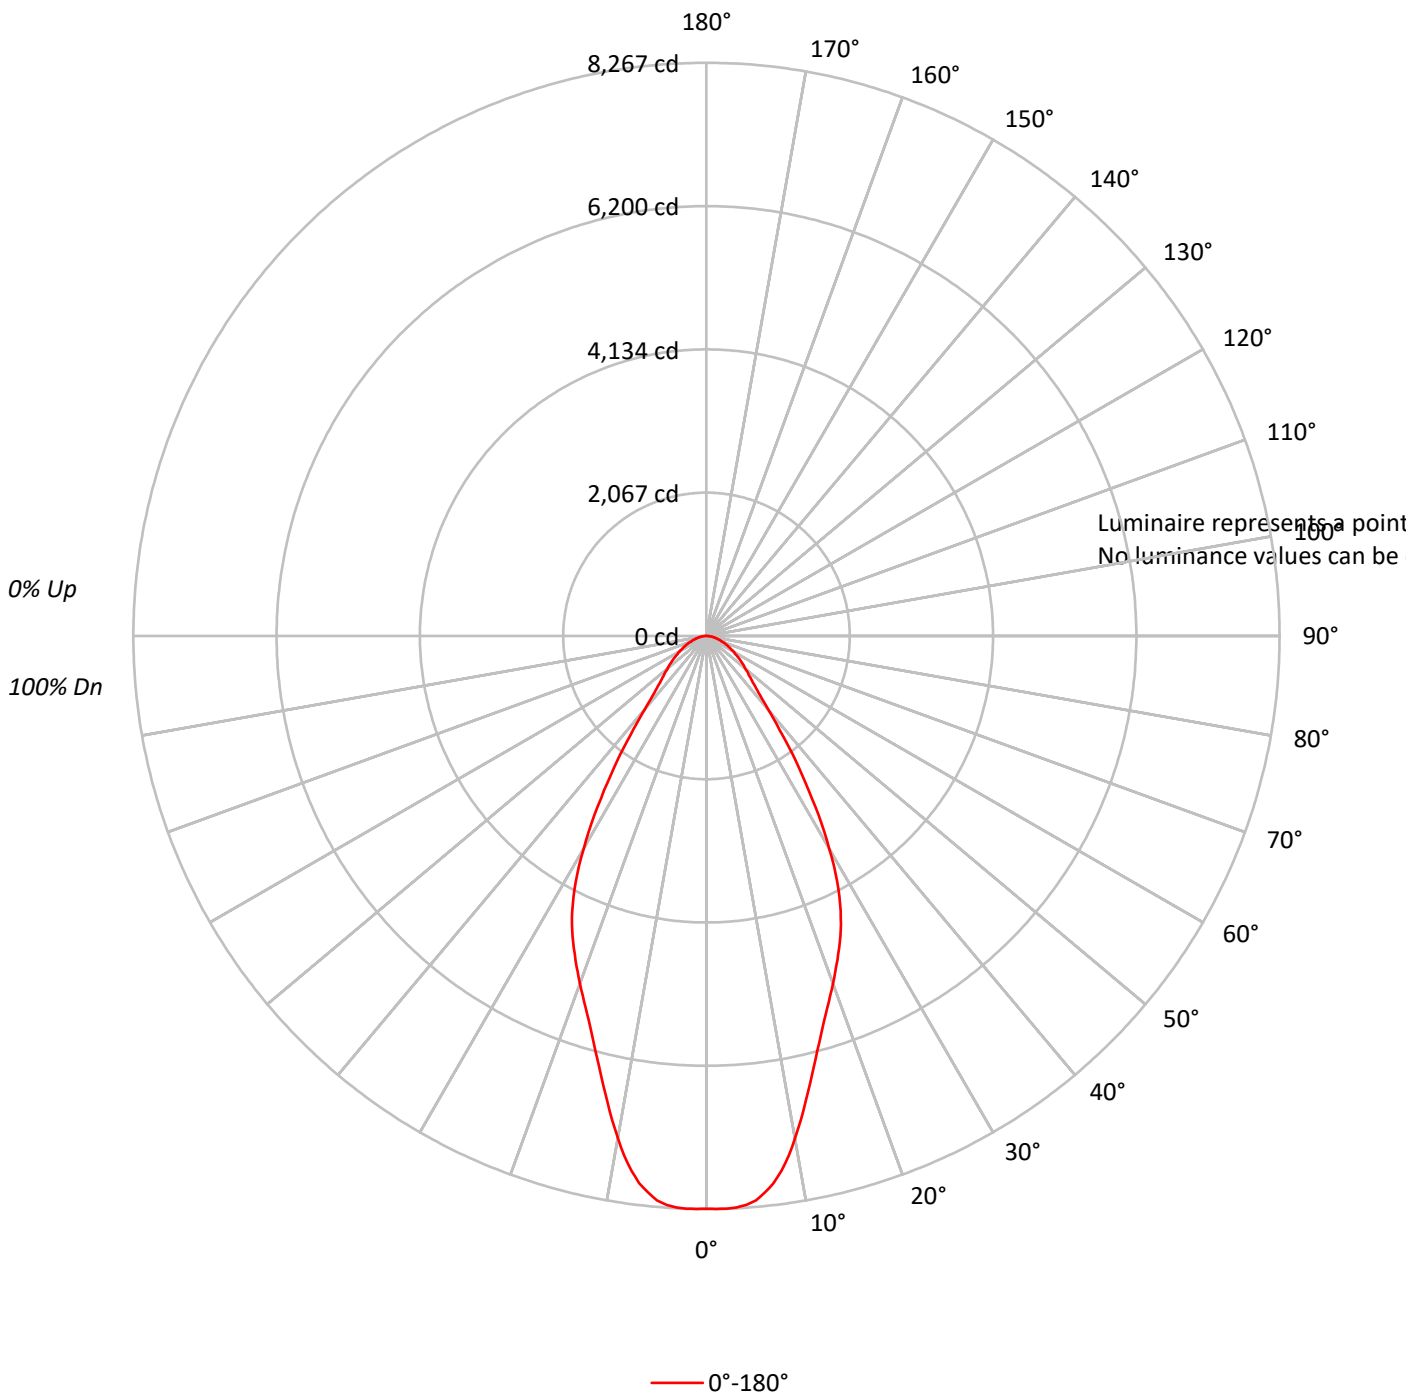



TEST NUMBER: P250696

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBN0MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	83	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	93	84	77	72	91	83	76	72	80	75	71	78	74	70	76	72	69	67
5	87	78	71	66	85	77	70	65	75	69	65	73	68	64	71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60	68	63	59	67	62	59	57
7	78	67	60	56	76	67	60	55	65	59	55	64	59	55	63	58	54	53
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	45	43

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P250696

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBN0MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	754.2	9.6
10°-20°	1740.2	22.1
20°-30°	2074.1	26.3
30°-40°	1464.1	18.6
40°-50°	756.1	9.6
50°-60°	518.8	6.6
60°-70°	337.3	4.3
70°-80°	176.6	2.2
80°-90°	53.6	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4568.5	58.0
0°-40°	6032.5	76.6
0°-60°	7307.4	92.8
0°-90°	7875.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7875.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8262	
5°	8171	754
15°	6189	1740
25°	4591	2074
35°	2327	1464
45°	945	756
55°	575	519
65°	339	337
75°	163	177
85°	45	54
90°	0	



TEST NUMBER: P250696

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBN0MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	8261.9
1°	8266.9
2°	8266.9
3°	8254.4
4°	8226.8
5°	8171.4
6°	8073.4
7°	7952.8
8°	7786.9
9°	7586.0
10°	7359.9
11°	7121.1
12°	6872.3
13°	6633.7
14°	6402.5
15°	6189.0
16°	5990.4
17°	5807.0
18°	5641.1
19°	5485.3
20°	5334.5
21°	5186.2
22°	5040.6
23°	4894.9
24°	4746.6
25°	4590.8
26°	4414.8
27°	4223.9
28°	4015.4
29°	3794.3
30°	3543.0
31°	3299.3
32°	3050.4
33°	2794.2
34°	2557.9
35°	2326.8
37.5°	1791.7
40°	1379.6
42.5°	1110.7
45°	944.8
47.5°	826.6
50°	733.7
52.5°	653.3
55°	575.4
57.5°	505.1



TEST NUMBER: P250696

CATALOG NUMBER: LD8B100D010 ER8B100927 8LBN0MW

CANDELA DISTRIBUTION (continued):

	0°
60°	447.3
62.5°	389.5
65°	339.2
67.5°	294.0
70°	236.2
72.5°	203.6
75°	163.4
77.5°	133.1
80°	102.9
82.5°	75.4
85°	45.2
87.5°	25.1
90°	0.0

(END OF REPORT)