

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250619

Luminaire Tested: **LD8B100D010 ER8B1009730 8LBM0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P250619  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13928)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B100D010 ER8B1009730 8LBM0B  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT  
97 CRI 3000 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5108.0 lumens  
Efficiency: N/A  
Efficacy: 48.1 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.87  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 106.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P250619

CATALOG NUMBER: LD8B100D010 ER8B1009730 8LBM0B

### Luminous Intensity Polar Plot

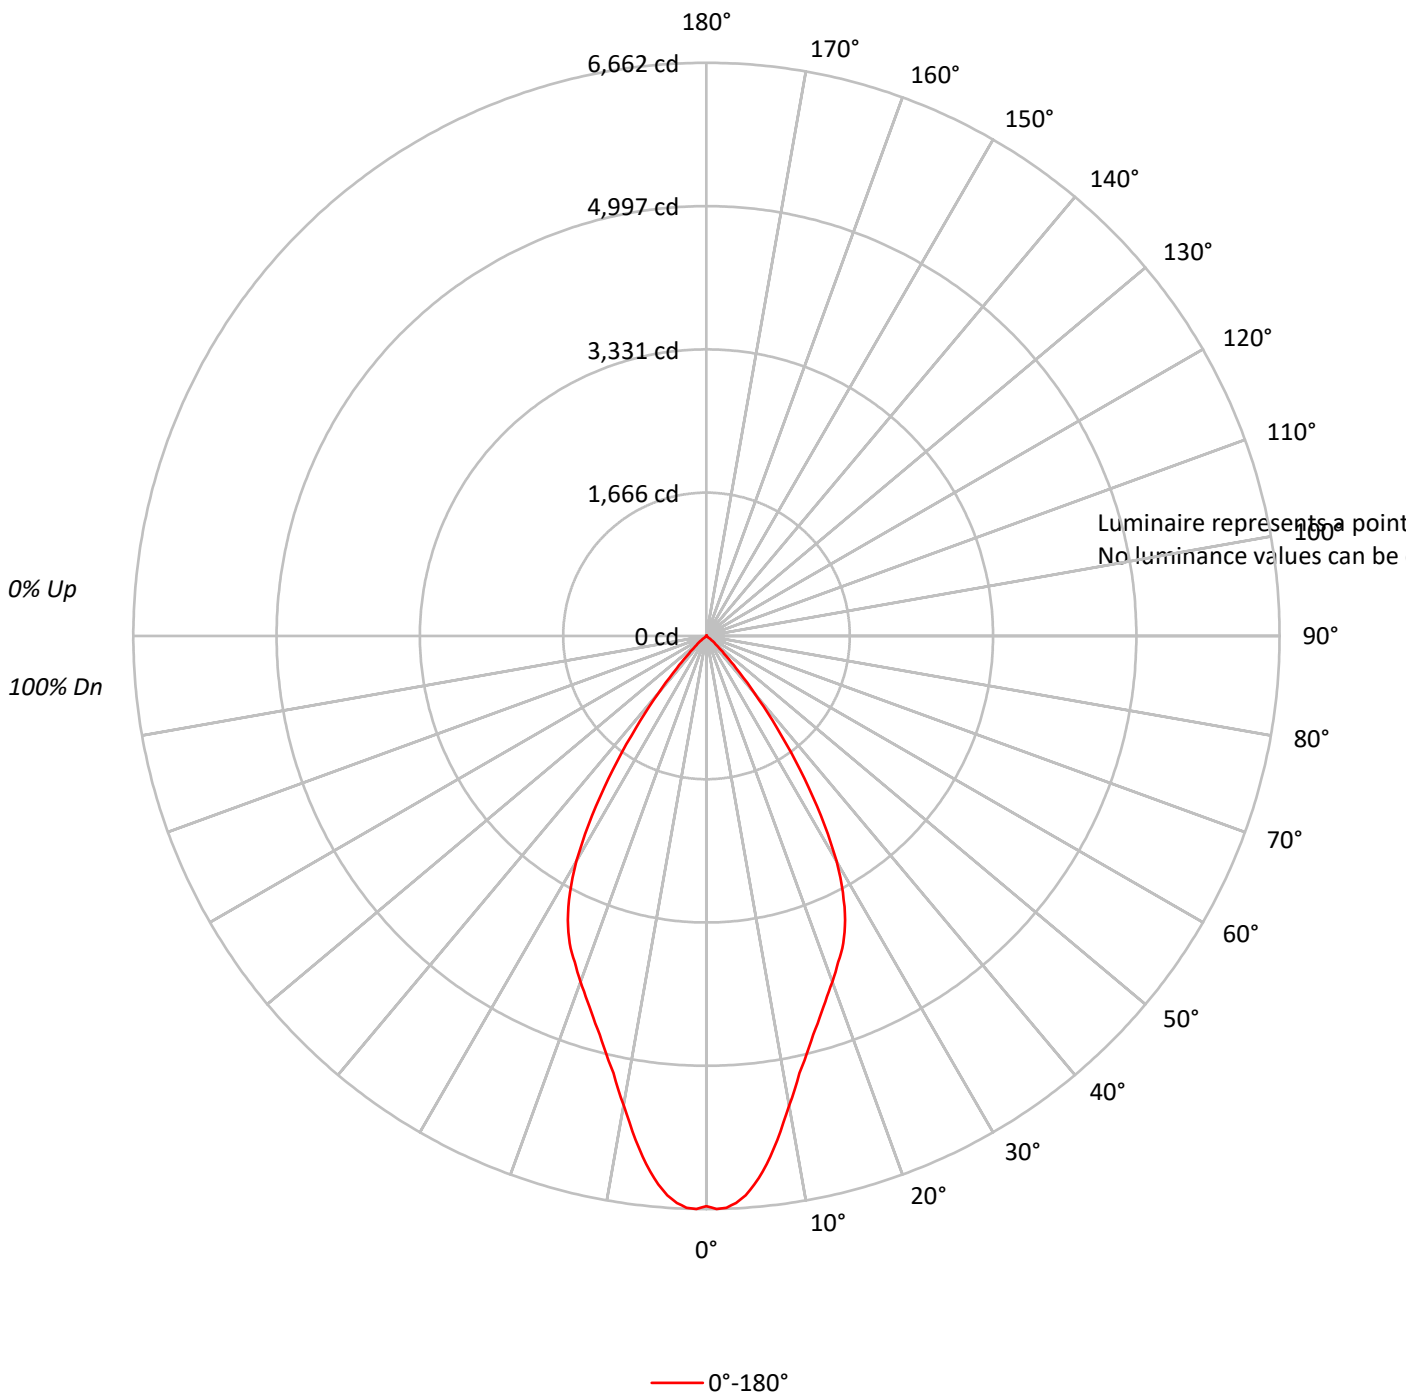



TEST NUMBER: P250619

CATALOG NUMBER: LD8B100D010 ER8B1009730 8LBM0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86		90	87	84		88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79		85	81	78		83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74		80	76	73		79	75	72	71
6	88	79	74	69	87	79	73	69	77	72	69		76	71	68		74	71	68	66
7	84	75	69	65	83	74	68	64	73	68	64		72	67	64		70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60		68	63	60		67	63	60	58
9	76	66	61	57	75	66	60	57	65	60	56		64	60	56		63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53		61	56	53		60	56	53	51

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P250619

CATALOG NUMBER: LD8B100D010 ER8B1009730 8LBM0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	582.2	11.4
10°-20°	1352.0	26.5
20°-30°	1715.2	33.6
30°-40°	1175.0	23.0
40°-50°	267.8	5.2
50°-60°	13.4	0.3
60°-70°	0.6	0.0
70°-80°	1.0	0.0
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3649.3	71.4
0°-40°	4824.3	94.4
0°-60°	5105.4	99.9
0°-90°	5108.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5108.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6628	
5°	6401	582
15°	4799	1352
25°	3799	1715
35°	1898	1175
45°	289	268
55°	5	13
65°	2	1
75°	0	1
85°	0	1
90°	0	



TEST NUMBER: P250619

CATALOG NUMBER: LD8B100D010 ER8B1009730 8LBM0B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6627.8
1°	6662.4
2°	6650.0
3°	6600.6
4°	6516.7
5°	6400.7
6°	6260.0
7°	6097.1
8°	5916.9
9°	5724.3
10°	5541.7
11°	5373.8
12°	5193.6
13°	5062.8
14°	4924.6
15°	4798.7
16°	4685.1
17°	4574.0
18°	4470.4
19°	4369.1
20°	4277.8
21°	4184.0
22°	4087.7
23°	4003.8
24°	3910.0
25°	3799.0
26°	3675.5
27°	3532.4
28°	3379.3
29°	3209.0
30°	3021.4
31°	2809.1
32°	2589.4
33°	2359.8
34°	2125.3
35°	1898.2
37.5°	1340.4
40°	863.9
42.5°	508.5
45°	288.8
47.5°	155.5
50°	79.0
52.5°	14.8
55°	5.0
57.5°	2.5



TEST NUMBER: P250619

CATALOG NUMBER: LD8B100D010 ER8B1009730 8LBM0B

**CANDELA DISTRIBUTION (continued):**

	0°
60°	0.0
62.5°	0.0
65°	2.5
67.5°	0.0
70°	0.0
72.5°	2.5
75°	0.0
77.5°	0.0
80°	2.5
82.5°	0.0
85°	0.0
87.5°	2.5
90°	0.0

(END OF REPORT)