

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P249871

Luminaire Tested: **LD8B120D010 ER8B120827 8LBM0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P249871  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13954)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B120D010 ER8B120827 8LBM0H  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11247.0 lumens  
Efficiency: N/A  
Efficacy: 95.1 lumens/watt  
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.93  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 118.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P249871

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBM0H

### Luminous Intensity Polar Plot

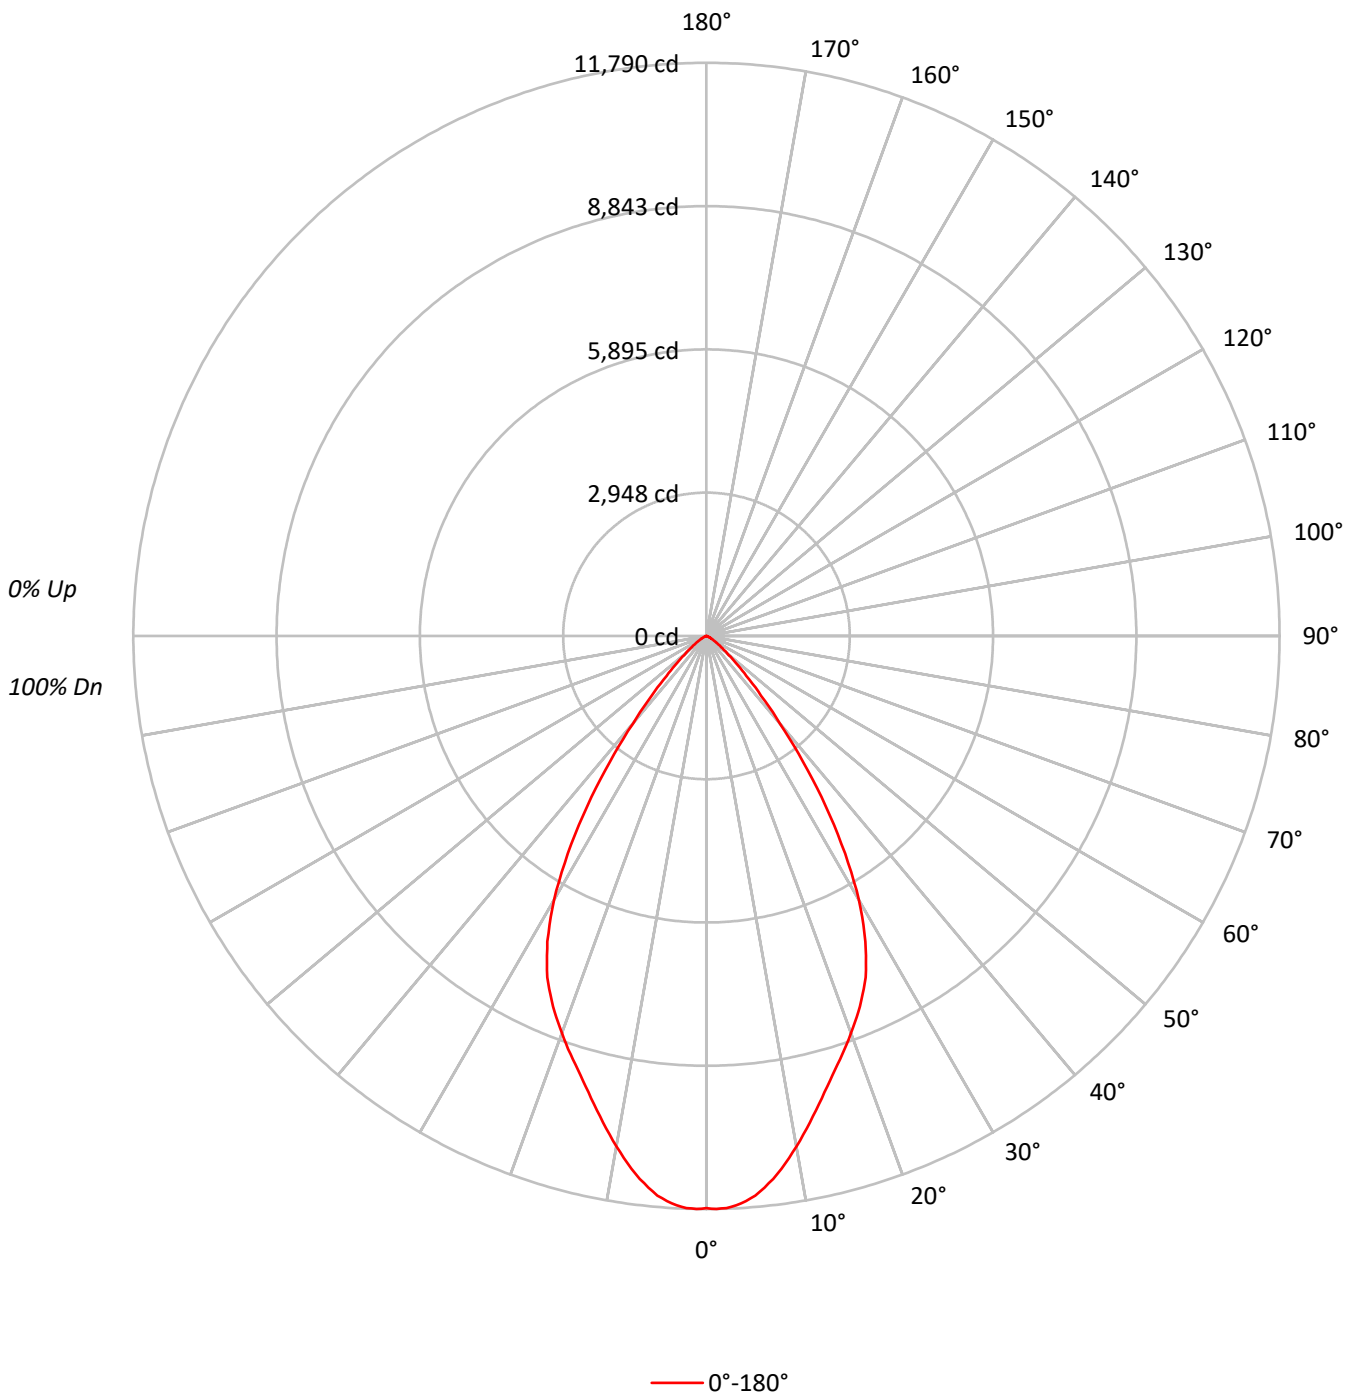



TEST NUMBER: P249871

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBM0H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  | 0   |     |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 | 100 |
| 1   | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 101 |  | 100 | 99  | 98  |  | 97  | 96  | 95  | 93  |
| 2   | 107 | 102 | 98  | 94  | 105 | 100 | 97  | 93  | 97  | 94  | 91  |  | 94  | 92  | 89  |  | 91  | 89  | 87  | 86  |
| 3   | 101 | 95  | 90  | 85  | 99  | 93  | 89  | 85  | 91  | 87  | 83  |  | 88  | 85  | 82  |  | 86  | 83  | 81  | 79  |
| 4   | 96  | 88  | 82  | 78  | 94  | 87  | 82  | 77  | 85  | 80  | 76  |  | 83  | 79  | 76  |  | 81  | 77  | 75  | 73  |
| 5   | 91  | 82  | 76  | 71  | 89  | 81  | 75  | 71  | 79  | 74  | 70  |  | 78  | 73  | 70  |  | 76  | 72  | 69  | 68  |
| 6   | 86  | 77  | 70  | 66  | 84  | 76  | 70  | 66  | 74  | 69  | 65  |  | 73  | 68  | 65  |  | 71  | 67  | 64  | 63  |
| 7   | 81  | 72  | 65  | 61  | 80  | 71  | 65  | 61  | 70  | 64  | 60  |  | 68  | 64  | 60  |  | 67  | 63  | 60  | 58  |
| 8   | 77  | 67  | 61  | 57  | 76  | 67  | 61  | 56  | 65  | 60  | 56  |  | 64  | 60  | 56  |  | 63  | 59  | 56  | 54  |
| 9   | 73  | 63  | 57  | 53  | 72  | 63  | 57  | 53  | 62  | 56  | 53  |  | 61  | 56  | 52  |  | 60  | 55  | 52  | 51  |
| 10  | 70  | 60  | 53  | 49  | 69  | 59  | 53  | 49  | 58  | 53  | 49  |  | 57  | 53  | 49  |  | 57  | 52  | 49  | 48  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 363005 |
| 5°  | 357659 |
| 10° | 333786 |
| 15° | 306382 |
| 20° | 285352 |
| 25° | 263639 |
| 30° | 223571 |
| 35° | 160831 |
| 40° | 94746  |
| 45° | 50635  |
| 50° | 26419  |
| 55° | 14897  |
| 60° | 8221   |
| 65° | 4859   |
| 70° | 2218   |
| 75° | 1251   |
| 80° | 622    |
| 85° | 0      |



TEST NUMBER: P249871

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBM0H

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 1073.2  | 9.5       |
| 10°-20°   | 2700.2  | 24.0      |
| 20°-30°   | 3505.4  | 31.2      |
| 30°-40°   | 2645.8  | 23.5      |
| 40°-50°   | 968.1   | 8.6       |
| 50°-60°   | 270.6   | 2.4       |
| 60°-70°   | 71.1    | 0.6       |
| 70°-80°   | 12.0    | 0.1       |
| 80°-90°   | 0.5     | 0.0       |
| 90°-100°  | 0.0     | 0.0       |
| 100°-110° | 0.0     | 0.0       |
| 110°-120° | 0.0     | 0.0       |
| 120°-130° | 0.0     | 0.0       |
| 130°-140° | 0.0     | 0.0       |
| 140°-150° | 0.0     | 0.0       |
| 150°-160° | 0.0     | 0.0       |
| 160°-170° | 0.0     | 0.0       |
| 170°-180° | 0.0     | 0.0       |
| 0°-30°    | 7278.8  | 64.7      |
| 0°-40°    | 9924.7  | 88.2      |
| 0°-60°    | 11163.4 | 99.3      |
| 0°-90°    | 11247.0 | 100.0     |
| 90°-120°  | 0.0     | 0.0       |
| 90°-150°  | 0.0     | 0.0       |
| 90°-180°  | 0.0     | 0.0       |
| 0°-180°   | 11247.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 11772 |      |
| 5°  | 11554 | ###  |
| 15° | 9597  | 2700 |
| 25° | 7749  | 3505 |
| 35° | 4272  | 2646 |
| 45° | 1161  | 968  |
| 55° | 277   | 271  |
| 65° | 67    | 71   |
| 75° | 10    | 12   |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P249871

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBM0H

**CANDELA DISTRIBUTION (FULL):**

|       | 0°      |
|-------|---------|
| 0°    | 11772.0 |
| 1°    | 11789.5 |
| 2°    | 11775.5 |
| 3°    | 11729.9 |
| 4°    | 11652.7 |
| 5°    | 11554.5 |
| 6°    | 11410.7 |
| 7°    | 11252.9 |
| 8°    | 11070.5 |
| 9°    | 10870.5 |
| 10°   | 10660.0 |
| 11°   | 10449.6 |
| 12°   | 10232.1 |
| 13°   | 10011.1 |
| 14°   | 9800.6  |
| 15°   | 9597.2  |
| 16°   | 9404.3  |
| 17°   | 9218.4  |
| 18°   | 9050.0  |
| 19°   | 8874.6  |
| 20°   | 8695.7  |
| 22.5° | 8250.2  |
| 25°   | 7748.6  |
| 27.5° | 7085.7  |
| 30°   | 6278.9  |
| 32.5° | 5307.2  |
| 35°   | 4272.4  |
| 37.5° | 3262.2  |
| 40°   | 2353.7  |
| 42.5° | 1666.2  |
| 45°   | 1161.1  |
| 47.5° | 817.3   |
| 50°   | 550.7   |
| 52.5° | 403.4   |
| 55°   | 277.1   |
| 57.5° | 199.9   |
| 60°   | 133.3   |
| 62.5° | 98.2    |
| 65°   | 66.6    |
| 67.5° | 45.6    |
| 70°   | 24.6    |
| 72.5° | 17.5    |
| 75°   | 10.5    |
| 77.5° | 3.5     |
| 80°   | 3.5     |



TEST NUMBER: P249871

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBM0H

**CANDELA DISTRIBUTION (continued):**

|       | 0°  |
|-------|-----|
| 82.5° | 0.0 |
| 85°   | 0.0 |
| 87.5° | 0.0 |
| 90°   | 0.0 |

(END OF REPORT)