

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250375

Luminaire Tested: **LD8B120D010 ER8B120827 8LBN0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250375
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13948)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B120D010 ER8B120827 8LBN0B
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT
80 CRI 2700 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6831.0 lumens
Efficiency: N/A
Efficacy: 57.7 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.77
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 118.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250375

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBN0B

Luminous Intensity Polar Plot

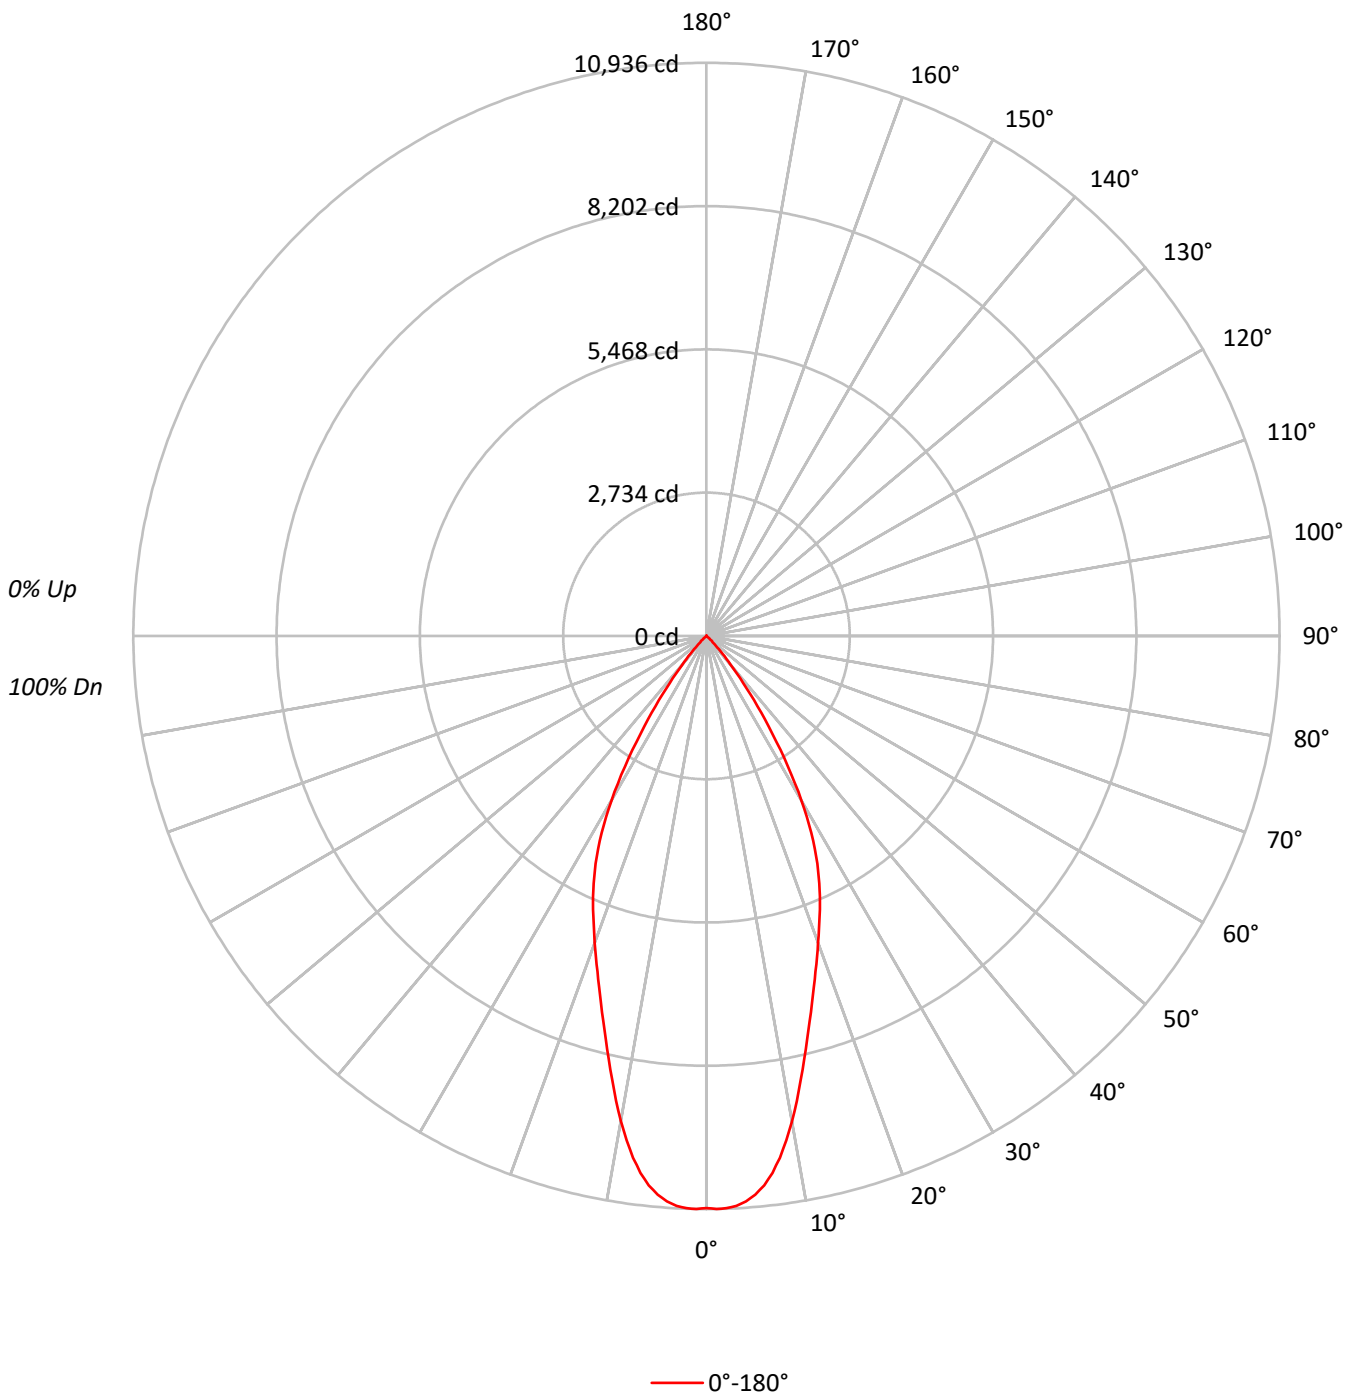



TEST NUMBER: P250375

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBNOB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102		101	100	99		98	97	96	94
2	109	104	101	97	107	103	99	96	99	97	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	88		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	90	82	77	73	89	81	76	72	80	75	72		79	75	71		77	74	71	70
7	86	78	72	68	85	77	72	68	76	71	68		75	71	67		74	70	67	66
8	83	74	68	64	81	73	68	64	72	67	64		71	67	64		70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61		68	63	60		67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57		65	60	57		64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	336588
5°	331209
10°	294270
15°	242748
20°	204443
25°	172438
30°	129110
35°	73067
40°	28890
45°	7758
50°	1487
55°	0
60°	216
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P250375

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBN0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	979.9	14.3
10°-20°	2129.7	31.2
20°-30°	2286.4	33.5
30°-40°	1235.7	18.1
40°-50°	192.8	2.8
50°-60°	5.3	0.1
60°-70°	1.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5395.9	79.0
0°-40°	6631.6	97.1
0°-60°	6829.7	100.0
0°-90°	6831.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6831.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10915	
5°	10700	980
15°	7604	2130
25°	5068	2286
35°	1941	1236
45°	178	193
55°	0	5
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P250375

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBNOB

CANDELA DISTRIBUTION (FULL):

	0°
0°	10915.3
1°	10936.0
2°	10925.7
3°	10888.3
4°	10816.4
5°	10700.0
6°	10539.7
7°	10324.1
8°	10054.1
9°	9743.5
10°	9398.0
11°	9035.7
12°	8659.8
13°	8284.2
14°	7935.3
15°	7603.9
16°	7299.7
17°	7005.8
18°	6732.3
19°	6476.3
20°	6230.1
21°	5990.8
22°	5765.1
23°	5539.9
24°	5304.0
25°	5068.1
26°	4828.8
27°	4555.5
28°	4254.6
29°	3947.4
30°	3626.0
31°	3280.9
32°	2935.4
33°	2593.8
34°	2248.7
35°	1941.0
37.5°	1240.5
40°	717.7
42.5°	382.9
45°	177.9
47.5°	95.9
50°	31.0
52.5°	3.5
55°	0.0
57.5°	3.5



TEST NUMBER: P250375

CATALOG NUMBER: LD8B120D010 ER8B120827 8LBN0B

CANDELA DISTRIBUTION (continued):

	0°
60°	3.5
62.5°	0.0
65°	0.0
67.5°	3.5
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)