

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246985

Luminaire Tested: **LD8B120D010 ER8B120940 8LBMOLI**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246985  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-81)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B120D010 ER8B120940 8LBM0LI  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 4000 CCT WITH SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11286.9 lumens  
Efficiency: N/A  
Efficacy: 95.4 lumens/watt  
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.75  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 118.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246985

CATALOG NUMBER: LD8B120D010 ER8B120940 8LBM0LI

### Luminous Intensity Polar Plot

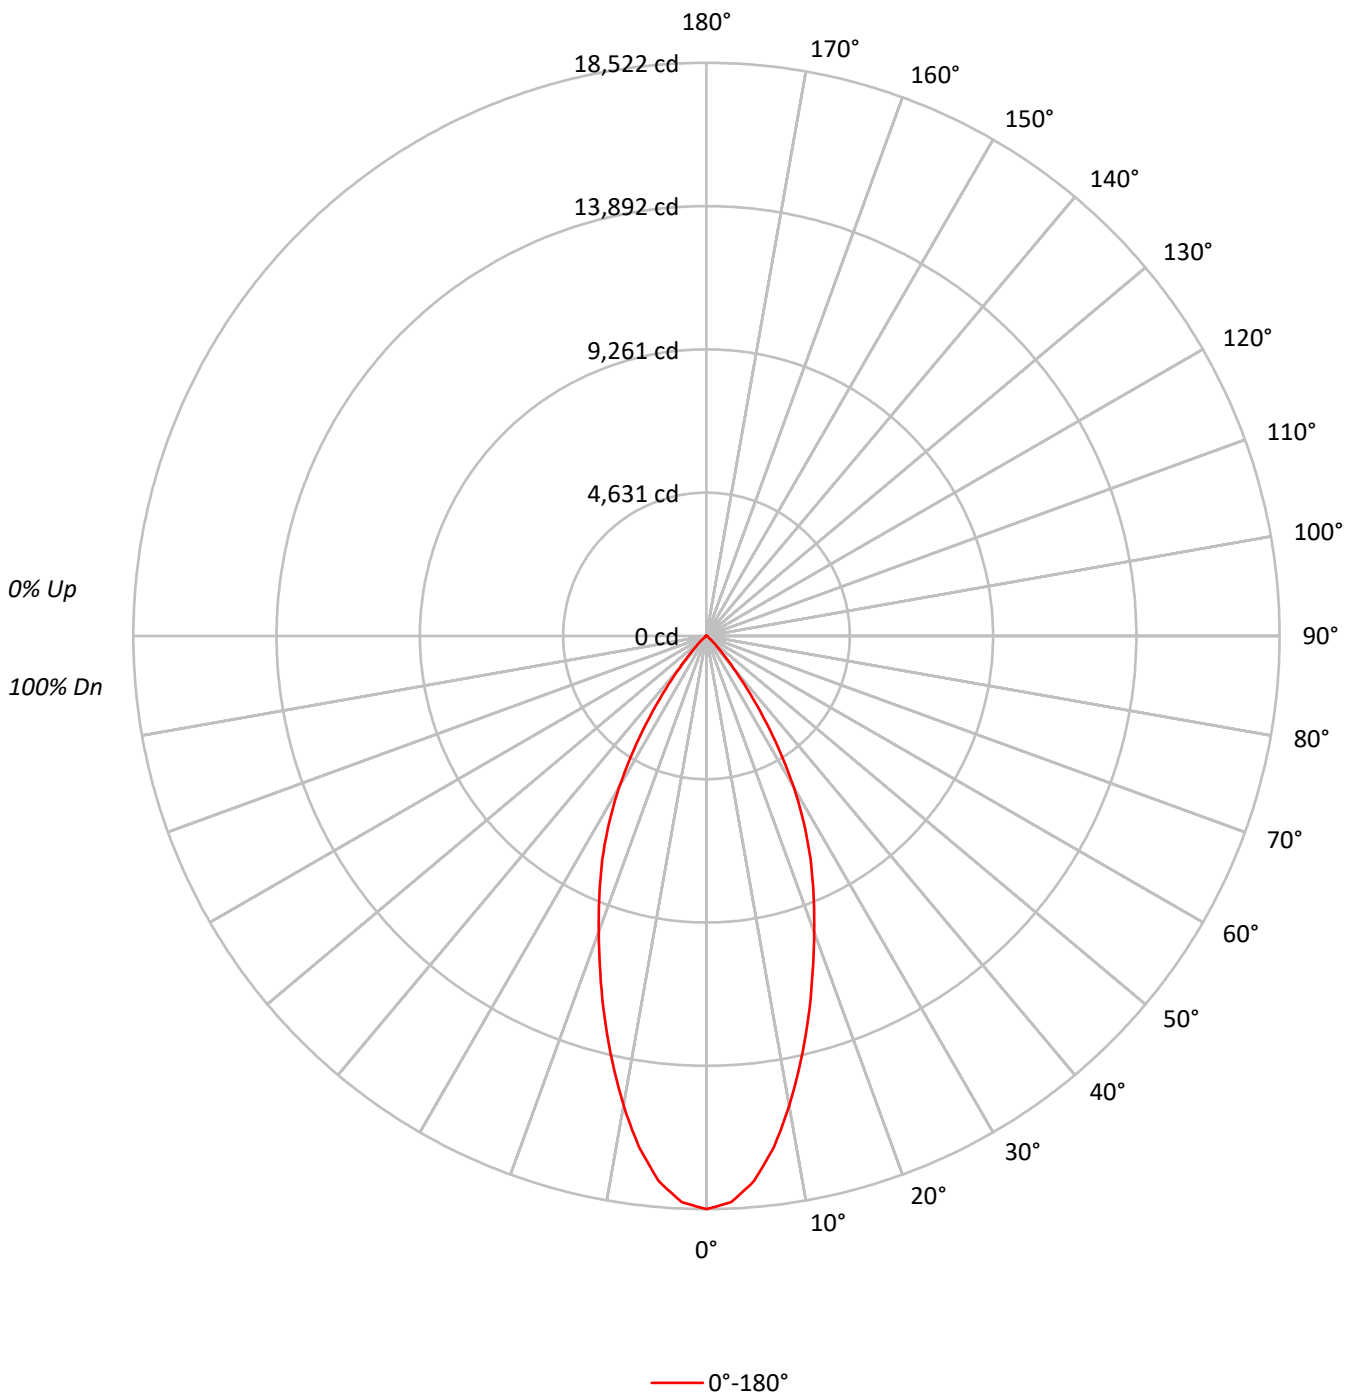



TEST NUMBER: P246985

CATALOG NUMBER: LD8B120D010 ER8B120940 8LBM0LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78
5	94	87	81	77	93	86	81	77	84	79	76	82	78	75	81	77	75	73
6	90	82	76	72	89	81	76	72	79	75	71	78	74	71	77	73	70	69
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65
8	82	73	68	64	81	73	67	64	72	67	63	71	66	63	70	66	63	62
9	79	70	64	60	78	69	64	60	68	63	60	67	63	60	67	63	60	58
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	55

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	571159
5°	547349
10°	482637
15°	406745
20°	333962
25°	270682
30°	200387
35°	120623
40°	53719
45°	20884
50°	7489
55°	2188
60°	1536
65°	1146
70°	117
75°	620
80°	0
85°	1840



TEST NUMBER: P246985

CATALOG NUMBER: LD8B120D010 ER8B120940 8LBM0LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1614.3	14.3
10°-20°	3538.8	31.4
20°-30°	3609.1	32.0
30°-40°	2021.3	17.9
40°-50°	431.0	3.8
50°-60°	53.4	0.5
60°-70°	13.9	0.1
70°-80°	3.3	0.0
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8762.2	77.6
0°-40°	10783.5	95.5
0°-60°	11268.0	99.8
0°-90°	11286.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11286.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	18522	
5°	17683	###
15°	12741	3539
25°	7956	3609
35°	3204	2021
45°	479	431
55°	41	53
65°	16	14
75°	5	3
85°	5	2
90°	0	



TEST NUMBER: P246985

CATALOG NUMBER: LD8B120D010 ER8B120940 8LBM0LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	18522.3
2.5°	18313.7
5°	17682.6
7.5°	16666.9
10°	15413.8
12.5°	14068.9
15°	12741.0
17.5°	11405.2
20°	10177.0
22.5°	9034.2
25°	7955.6
27.5°	6823.2
30°	5627.8
32.5°	4378.6
35°	3204.3
37.5°	2146.7
40°	1334.5
42.5°	797.8
45°	478.9
47.5°	266.4
50°	156.1
52.5°	82.7
55°	40.7
57.5°	28.9
60°	24.9
62.5°	11.8
65°	15.7
67.5°	15.7
70°	1.3
72.5°	3.9
75°	5.2
77.5°	2.6
80°	0.0
82.5°	1.3
85°	5.2
87.5°	0.0
90°	0.0

(END OF REPORT)