

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244807

Luminaire Tested: **LD8B15D010 ER8B15827 8LBM0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244807  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201704)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B15D010 ER8B15827 8LBM0WMH  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 2700 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1369.9 lumens  
Efficiency: N/A  
Efficacy: 95.1 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.83  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244807

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBM0WMH

### Luminous Intensity Polar Plot

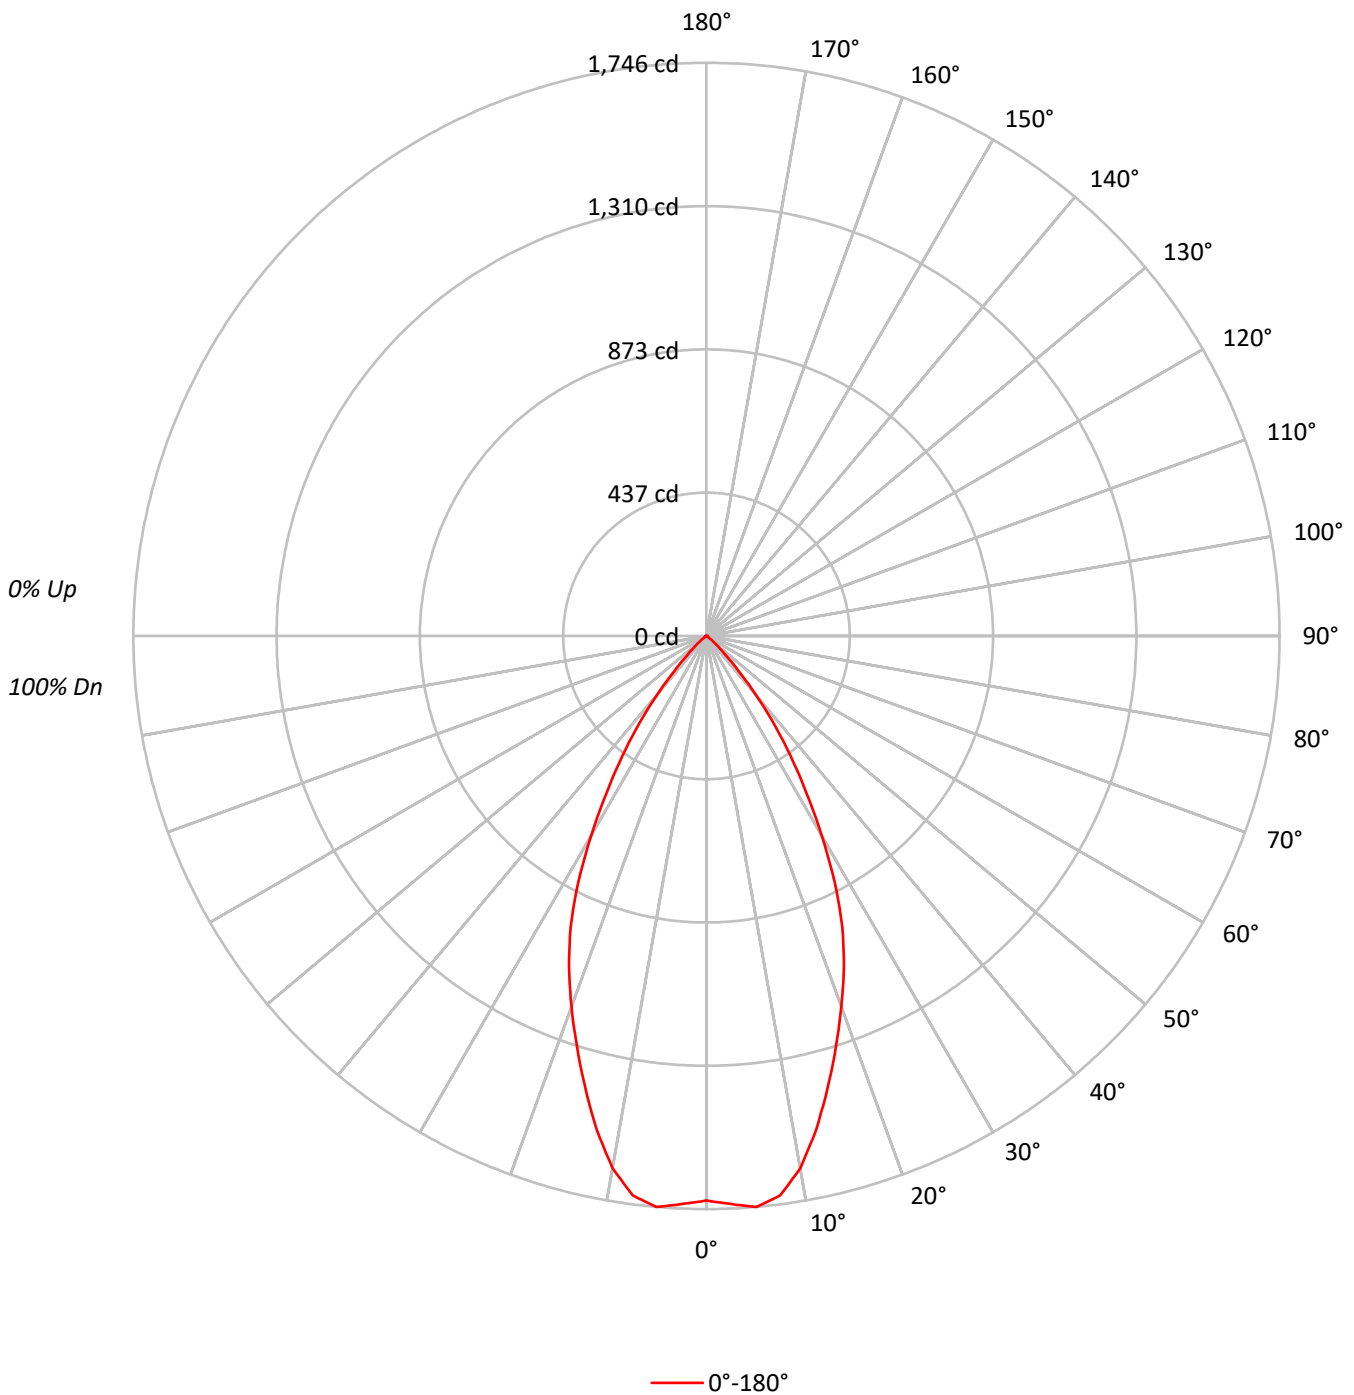



TEST NUMBER: P244807

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBM0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86		90	87	85		88	86	83	82
4	98	91	85	81	96	89	84	81	87	83	80		85	82	79		83	80	78	76
5	93	85	79	75	92	84	79	75	82	78	74		81	77	73		79	76	73	71
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75	71	68	67
7	84	75	69	65	83	75	69	65	73	68	65		72	68	64		71	67	64	63
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		67	63	60	59
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64	60	57	56
10	73	64	58	54	72	63	58	54	62	58	54		62	57	54		61	57	54	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	53032
5°	54052
10°	51533
15°	45505
20°	39434
25°	33320
30°	25039
35°	16767
40°	9387
45°	3772
50°	1305
55°	360
60°	204
65°	175
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P244807

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBM0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	163.4	11.9
10°-20°	397.6	29.0
20°-30°	441.2	32.2
30°-40°	279.5	20.4
40°-50°	77.6	5.7
50°-60°	8.9	0.6
60°-70°	1.7	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1002.1	73.2
0°-40°	1281.6	93.6
0°-60°	1368.1	99.9
0°-90°	1369.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1369.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1720	
5°	1746	163
15°	1425	398
25°	979	441
35°	445	280
45°	86	78
55°	7	9
65°	2	2
75°	0	0
85°	0	0
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P244807

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBM0WMH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1719.8
2.5°	1732.5
5°	1746.2
7.5°	1718.9
10°	1645.8
12.5°	1541.6
15°	1425.4
17.5°	1311.3
20°	1201.7
22.5°	1094.1
25°	979.3
27.5°	845.1
30°	703.2
32.5°	565.8
35°	445.4
37.5°	336.6
40°	233.2
42.5°	145.1
45°	86.5
47.5°	49.7
50°	27.2
52.5°	13.3
55°	6.7
57.5°	5.1
60°	3.3
62.5°	1.7
65°	2.4
67.5°	1.2
70°	0.0
72.5°	0.3
75°	0.0
77.5°	0.3
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P244807

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBM0WMH

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)