

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245527

Luminaire Tested: **LD8B15D010 ER8B15827 8LBW0GPH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P245527  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-46)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B15D010 ER8B15827 8LBW0GPH  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 2700 CCT WITH GRAPHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1292.0 lumens  
Efficiency: N/A  
Efficacy: 89.7 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P245527

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBW0GPH

### Luminous Intensity Polar Plot

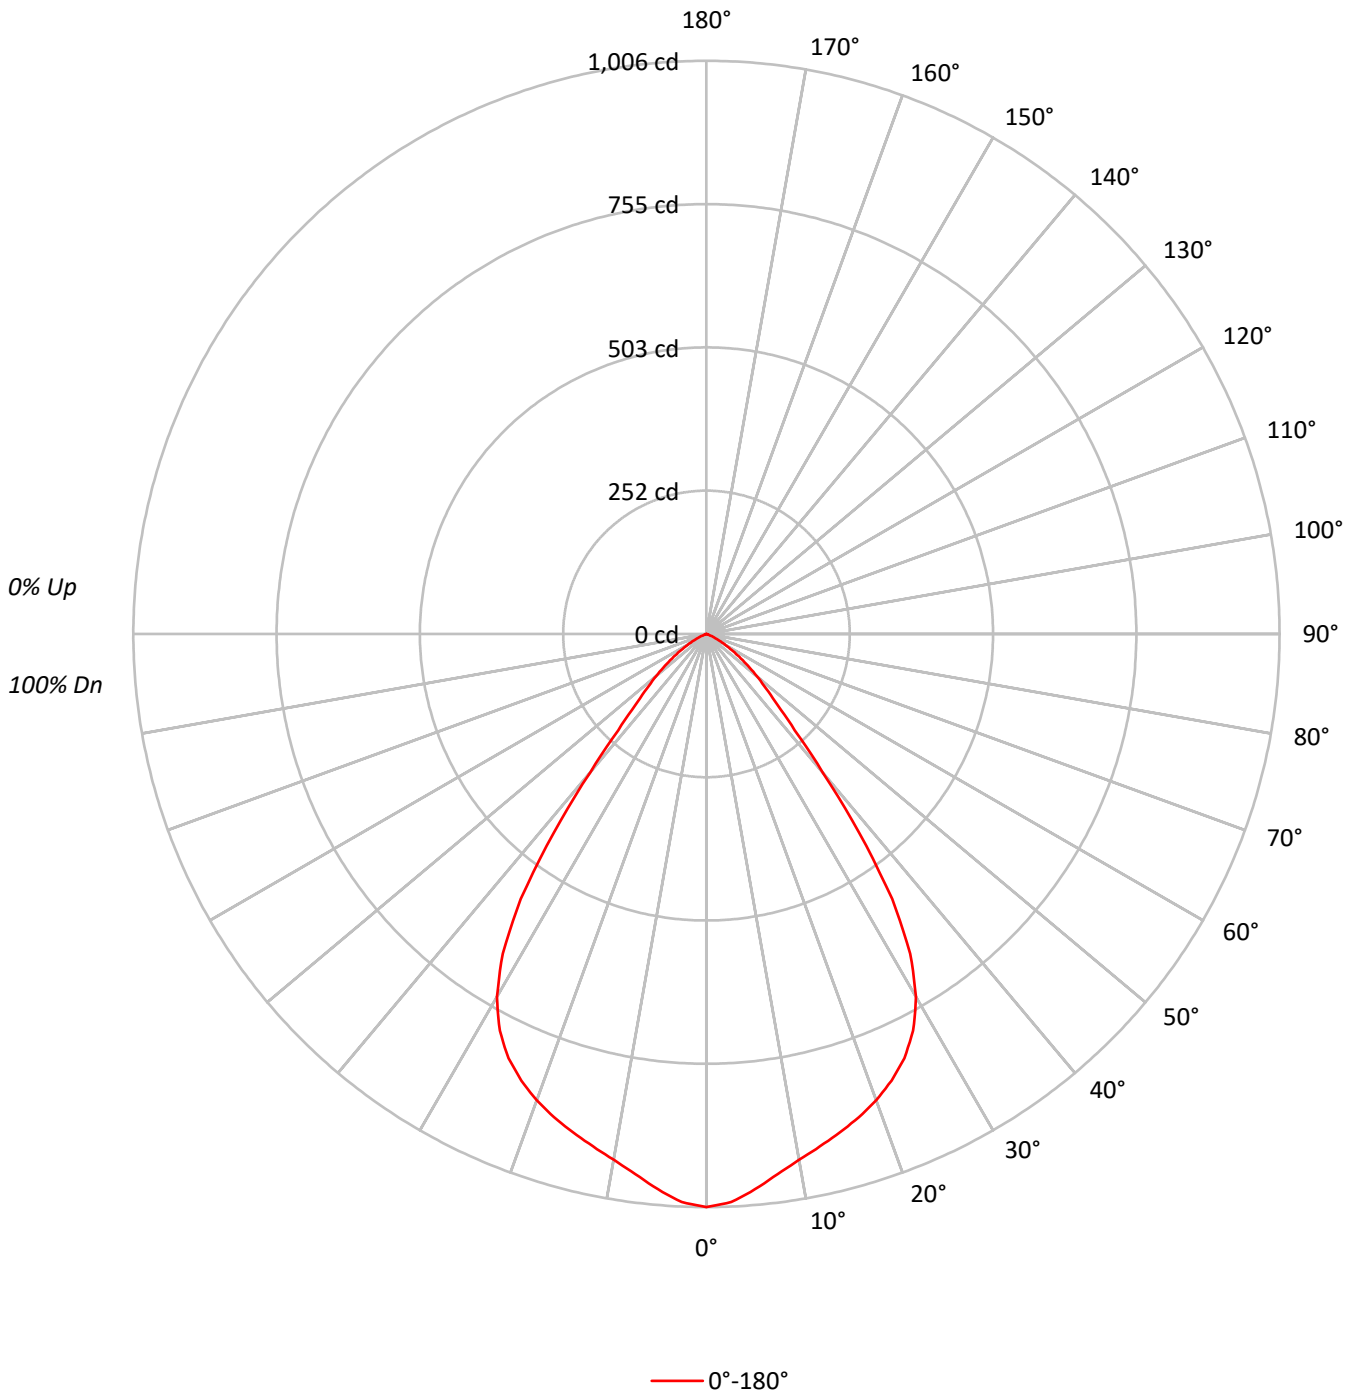



TEST NUMBER: P245527

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBW0GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70
5	88	79	72	67	87	78	72	67	76	71	66	74	70	66	73	69	65	64
6	83	73	66	61	82	72	66	61	71	65	61	69	64	60	68	63	60	58
7	78	68	61	56	77	67	61	56	66	60	56	65	59	56	63	59	55	54
8	74	63	56	52	73	63	56	52	61	56	51	60	55	51	59	55	51	49
9	70	59	52	48	69	58	52	48	57	52	48	57	51	47	56	51	47	46
10	66	55	49	44	65	55	49	44	54	48	44	53	48	44	52	47	44	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	31021
5°	30289
10°	29339
15°	28914
20°	28576
25°	27961
30°	26189
35°	21386
40°	12765
45°	7666
50°	5526
55°	3763
60°	2356
65°	1160
70°	298
75°	107
80°	89
85°	0



TEST NUMBER: P245527

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBW0GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	92.1	7.1
10°-20°	255.6	19.8
20°-30°	375.4	29.1
30°-40°	340.3	26.3
40°-50°	145.7	11.3
50°-60°	64.4	5.0
60°-70°	17.2	1.3
70°-80°	1.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	723.0	56.0
0°-40°	1063.3	82.3
0°-60°	1273.4	98.6
0°-90°	1292.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1292.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1006	
5°	978	92
15°	906	256
25°	822	375
35°	568	340
45°	176	146
55°	70	64
65°	16	17
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P245527

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBW0GPH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1006.0
2.5°	998.1
5°	978.5
7.5°	956.1
10°	937.0
12.5°	921.1
15°	905.7
17.5°	889.4
20°	870.8
22.5°	848.8
25°	821.8
27.5°	785.4
30°	735.5
32.5°	665.5
35°	568.1
37.5°	440.3
40°	317.1
42.5°	229.0
45°	175.8
47.5°	141.8
50°	115.2
52.5°	91.4
55°	70.0
57.5°	52.2
60°	38.2
62.5°	26.6
65°	15.9
67.5°	7.0
70°	3.3
72.5°	1.9
75°	0.9
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)