

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244663

Luminaire Tested: **LD8B15D010 ER8B15827 8LBW0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244663  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B15D010 ER8B15827 8LBW0WMH  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 2700 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1401.0 lumens  
Efficiency: N/A  
Efficacy: 97.3 lumens/watt  
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244663

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBW0WMH

### Luminous Intensity Polar Plot

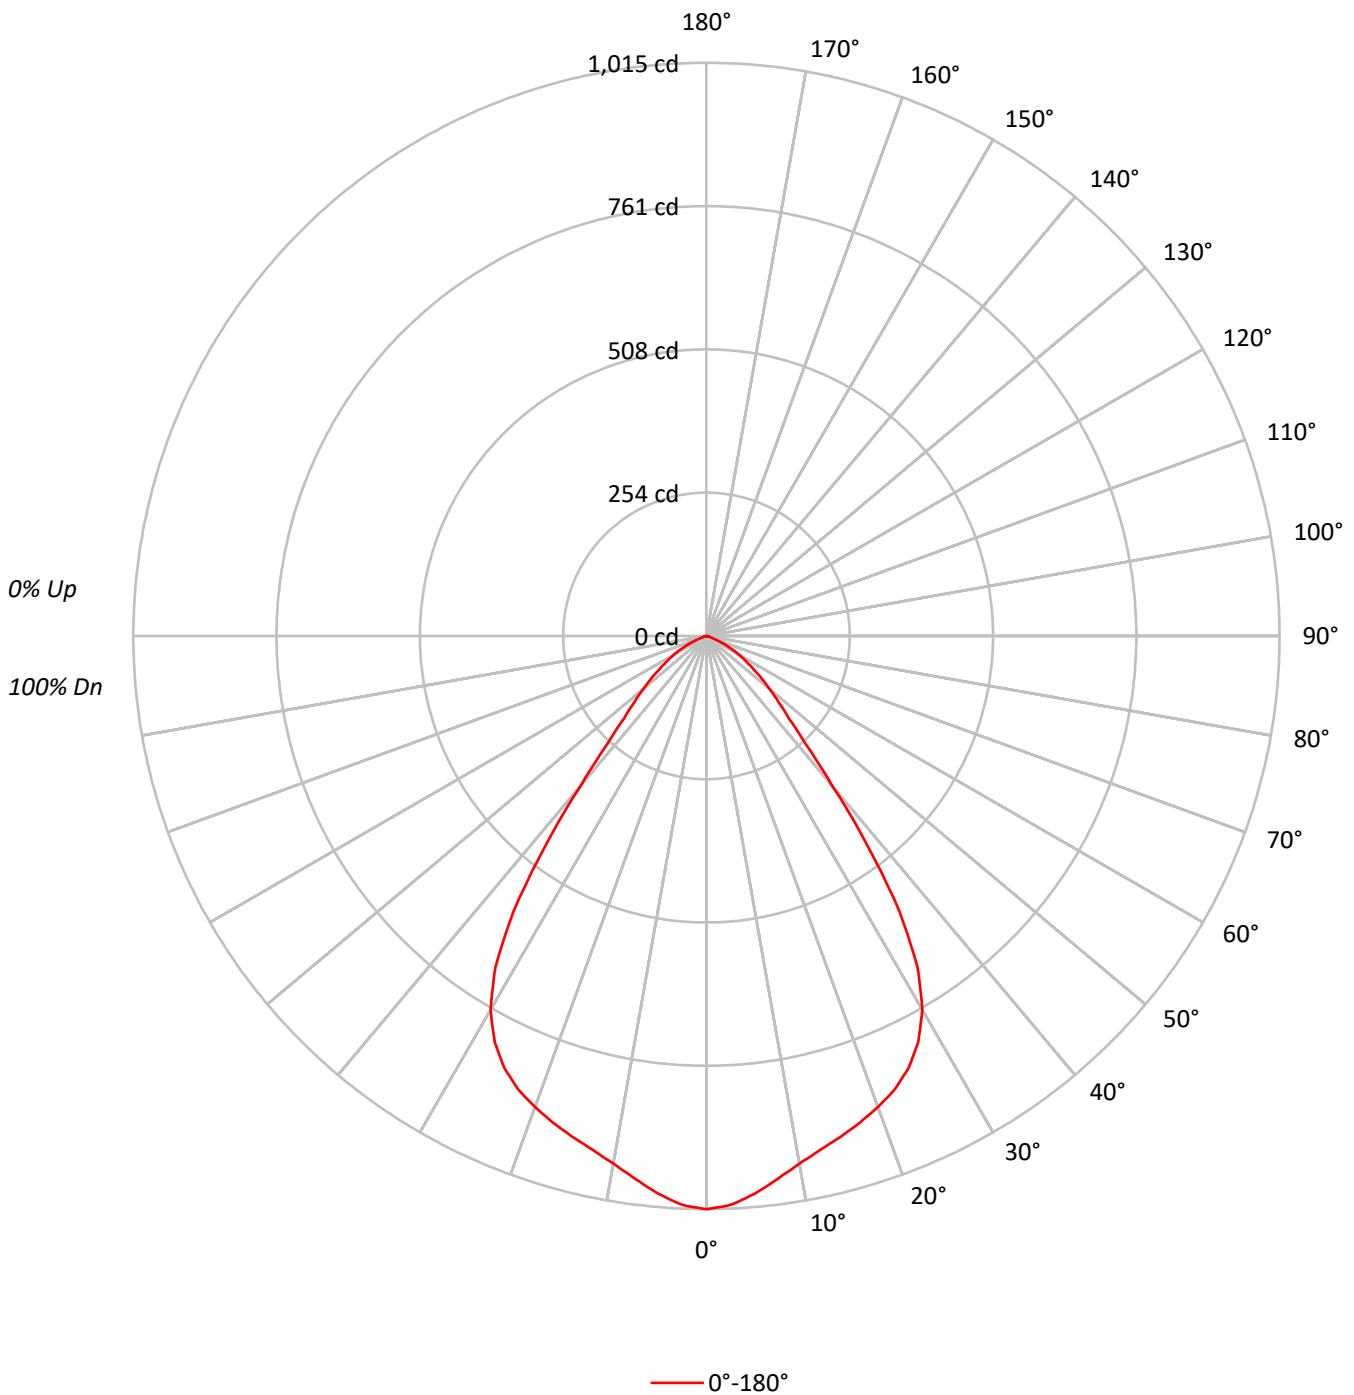



TEST NUMBER: P244663

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBW0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89	87	84	83
3	99	91	86	81	97	90	85	80	87	83	79		85	81	78		82	79	76	75
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	73	69	68
5	87	77	70	65	85	76	70	65	74	69	64		73	68	64		71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59		67	62	58		66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61	57	53	51
8	72	61	54	50	71	61	54	50	60	54	49		58	53	49		57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46		55	49	45		54	49	45	44
10	65	54	47	42	63	53	47	42	52	46	42		51	46	42		51	46	42	41

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	31308
5°	30679
10°	29706
15°	29306
20°	29133
25°	28764
30°	27218
35°	22447
40°	14016
45°	9014
50°	6990
55°	5382
60°	4077
65°	2649
70°	1136
75°	560
80°	249
85°	177



TEST NUMBER: P244663

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBW0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	93.2	6.7
10°-20°	259.4	18.5
20°-30°	386.3	27.6
30°-40°	358.7	25.6
40°-50°	169.4	12.1
50°-60°	91.0	6.5
60°-70°	36.6	2.6
70°-80°	5.8	0.4
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	738.9	52.7
0°-40°	1097.6	78.3
0°-60°	1358.1	96.9
0°-90°	1401.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1401.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1015	
5°	991	93
15°	918	259
25°	845	386
35°	596	359
45°	207	169
55°	100	91
65°	36	37
75°	5	6
85°	0	1
90°	0	



TEST NUMBER: P244663

CATALOG NUMBER: LD8B15D010 ER8B15827 8LBW0WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1015.3
2.5°	1008.3
5°	991.1
7.5°	969.2
10°	948.7
12.5°	932.0
15°	918.0
17.5°	903.6
20°	887.8
22.5°	869.6
25°	845.4
27.5°	811.4
30°	764.4
32.5°	695.5
35°	596.3
37.5°	469.7
40°	348.2
42.5°	259.3
45°	206.7
47.5°	172.7
50°	145.7
52.5°	121.5
55°	100.1
57.5°	81.5
60°	66.1
62.5°	51.7
65°	36.3
67.5°	21.4
70°	12.6
72.5°	7.4
75°	4.7
77.5°	2.8
80°	1.4
82.5°	0.9
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)