

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245317

Luminaire Tested: **LD8B15D010 ER8B15830 8LBS0WH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P245317  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-15)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B15D010 ER8B15830 8LBS0WH  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 3000 CCT WITH WHEAT TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1579.0 lumens  
Efficiency: N/A  
Efficacy: 109.7 lumens/watt  
Spacing Criteria (0/90/45): 1.27 / 1.27 / 1.23  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P245317

CATALOG NUMBER: LD8B15D010 ER8B15830 8LBS0WH

### Luminous Intensity Polar Plot

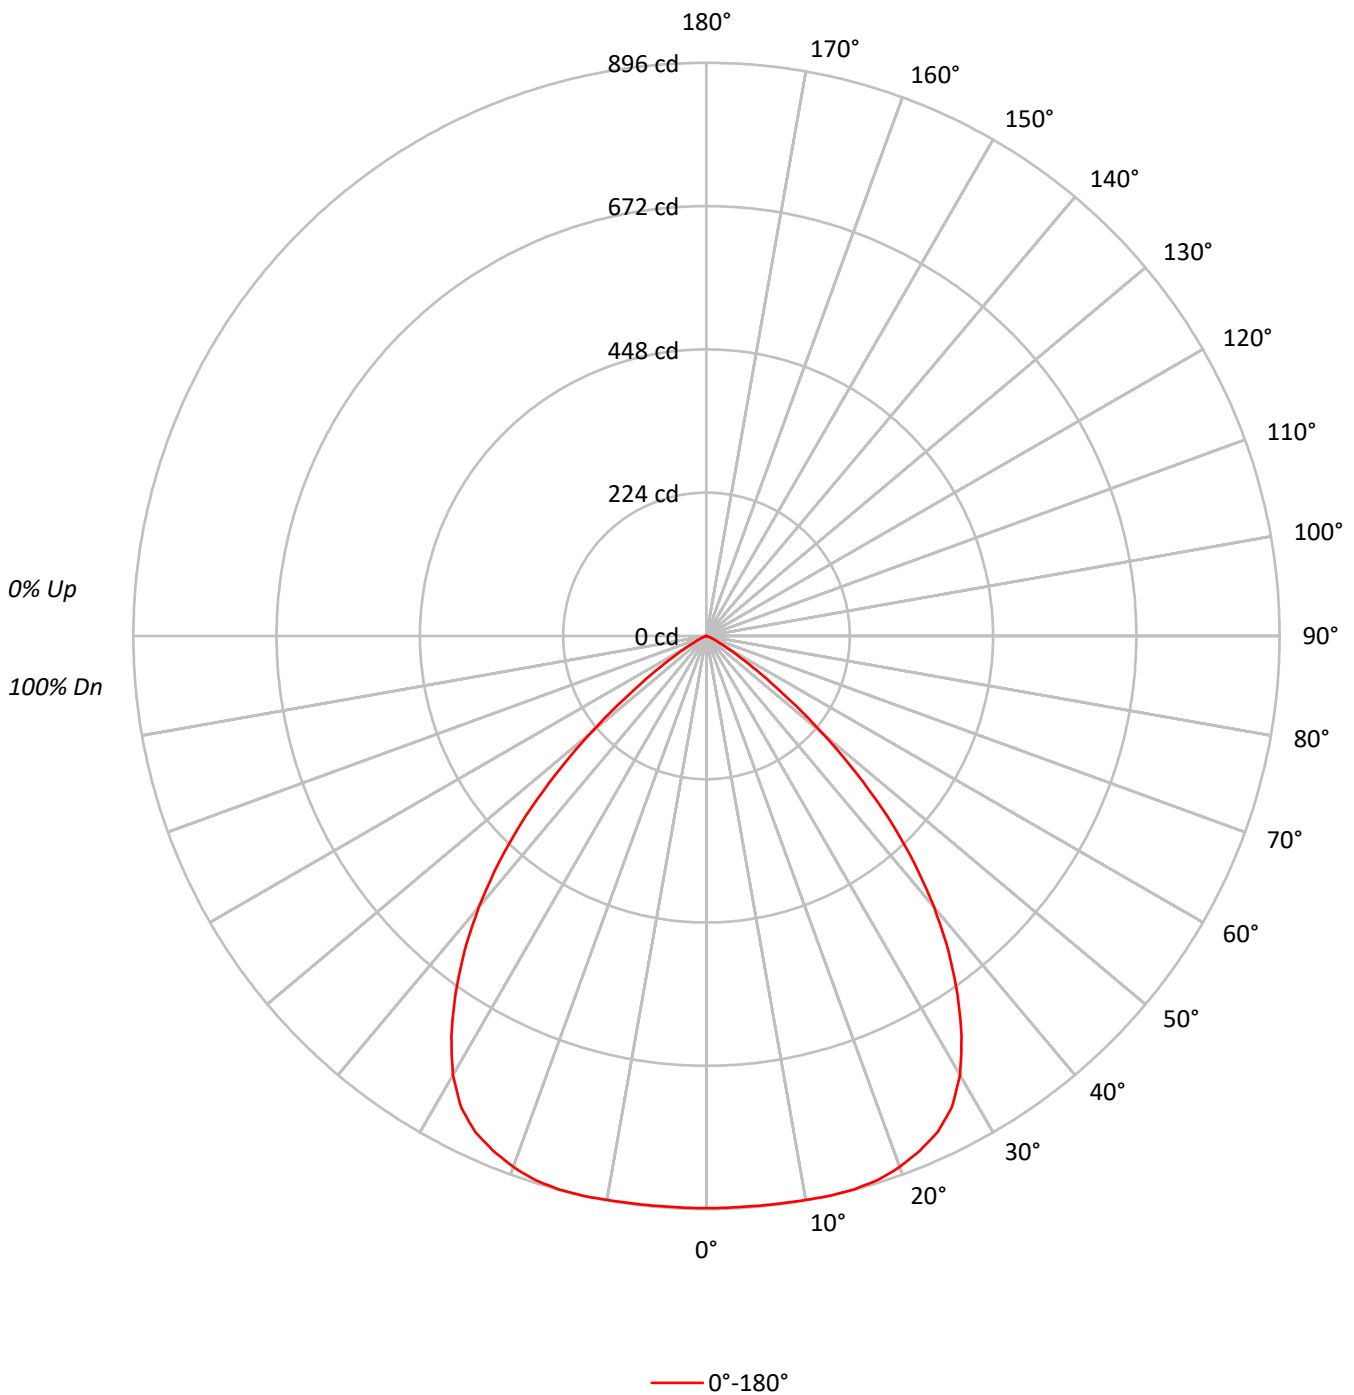



TEST NUMBER: P245317

CATALOG NUMBER: LD8B15D010 ER8B15830 8LBS0WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96	94	93	91
2	105	100	95	91	103	98	93	90	94	91	88		91	88	86		89	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	92	83	76	71	90	82	76	71	79	74	70		77	73	69		75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63		71	66	62		70	65	62	60
6	80	70	63	57	79	69	62	57	67	61	57		66	60	56		64	60	56	54
7	75	64	57	52	74	63	57	52	62	56	51		61	55	51		60	55	51	49
8	71	59	52	47	69	59	52	47	57	51	47		56	51	47		55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43		52	47	43		51	46	43	41
10	63	51	44	40	61	51	44	40	50	44	39		49	43	39		48	43	39	38

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	27580
5°	27685
10°	28034
15°	28582
20°	28989
25°	29108
30°	28218
35°	25752
40°	22277
45°	17540
50°	11312
55°	5554
60°	2282
65°	1000
70°	289
75°	107
80°	89
85°	0



TEST NUMBER: P245317

CATALOG NUMBER: LD8B15D010 ER8B15830 8LBS0WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	85.4	5.4
10°-20°	253.0	16.0
20°-30°	391.7	24.8
30°-40°	424.4	26.9
40°-50°	305.4	19.3
50°-60°	102.2	6.5
60°-70°	15.5	1.0
70°-80°	1.3	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	730.1	46.2
0°-40°	1154.5	73.1
0°-60°	1562.0	98.9
0°-90°	1579.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1579.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	894	
5°	894	85
15°	895	253
25°	856	392
35°	684	424
45°	402	305
55°	103	102
65°	14	15
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P245317

CATALOG NUMBER: LD8B15D010 ER8B15830 8LBS0WH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	894.4
2.5°	894.4
5°	894.4
7.5°	894.8
10°	895.3
12.5°	896.2
15°	895.3
17.5°	891.6
20°	883.4
22.5°	871.1
25°	855.5
27.5°	830.8
30°	792.5
32.5°	742.2
35°	684.1
37.5°	621.5
40°	553.4
42.5°	480.3
45°	402.2
47.5°	317.6
50°	235.8
52.5°	161.8
55°	103.3
57.5°	61.7
60°	37.0
62.5°	22.4
65°	13.7
67.5°	6.9
70°	3.2
72.5°	1.4
75°	0.9
77.5°	0.9
80°	0.5
82.5°	0.5
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)