

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244489

Luminaire Tested: **LD8B15D010 ER8B15935 8LBS0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244489  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B15D010 ER8B15935 8LBS0H  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 3500 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1427.0 lumens  
Efficiency: N/A  
Efficacy: 99.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244489

CATALOG NUMBER: LD8B15D010 ER8B15935 8LBS0H

### Luminous Intensity Polar Plot

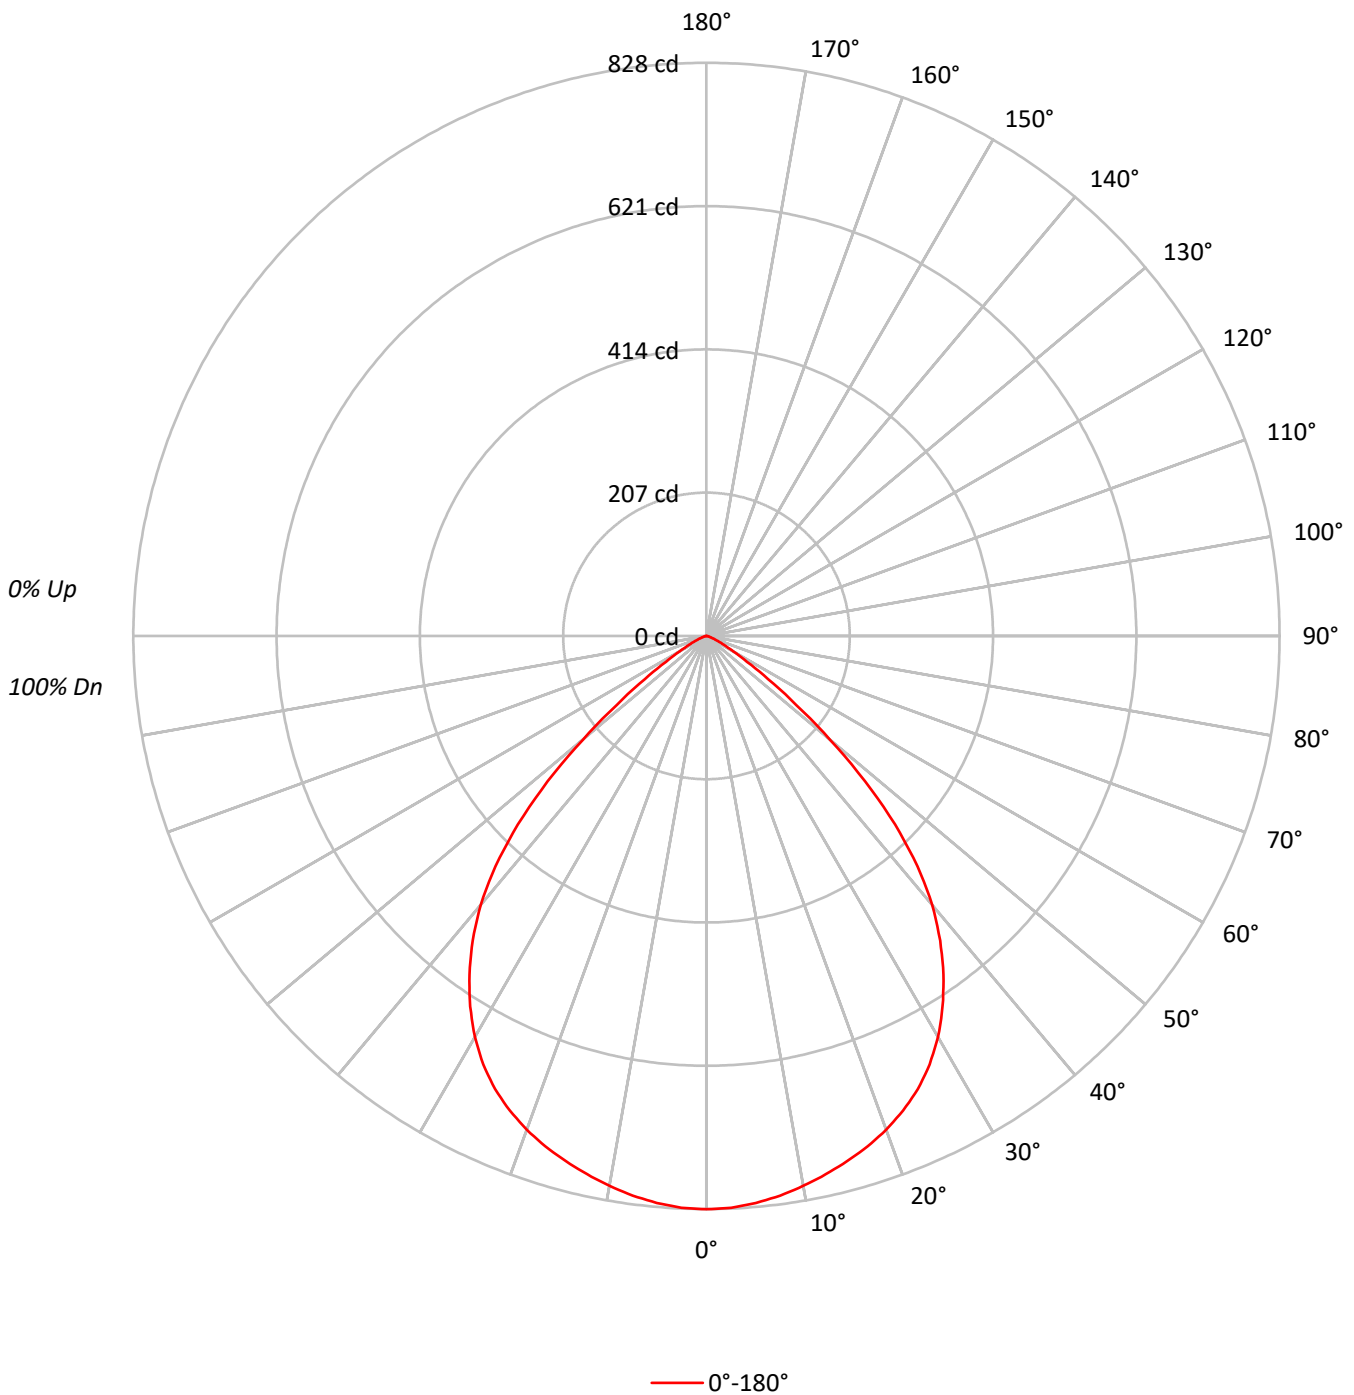



TEST NUMBER: P244489

CATALOG NUMBER: LD8B15D010 ER8B15935 8LBSOH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77		83	79	76		81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69		76	72	68		74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62		70	65	61		69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56		65	59	55		63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50		60	54	50		59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46		55	50	46		54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42		51	46	42		51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	25536
5°	25450
10°	25259
15°	25080
20°	24910
25°	24582
30°	23824
35°	22477
40°	20429
45°	16807
50°	11202
55°	5838
60°	2751
65°	1445
70°	721
75°	500
80°	373
85°	283



TEST NUMBER: P244489

CATALOG NUMBER: LD8B15D010 ER8B15935 8LBSOH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	78.0	5.5
10°-20°	221.7	15.5
20°-30°	331.7	23.2
30°-40°	371.0	26.0
40°-50°	291.1	20.4
50°-60°	106.2	7.4
60°-70°	21.7	1.5
70°-80°	4.6	0.3
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	631.4	44.2
0°-40°	1002.5	70.2
0°-60°	1399.7	98.1
0°-90°	1427.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1427.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	828	
5°	822	78
15°	786	222
25°	722	332
35°	597	371
45°	385	291
55°	109	106
65°	20	22
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P244489

CATALOG NUMBER: LD8B15D010 ER8B15935 8LBS0H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	828.1
2.5°	826.9
5°	822.2
7.5°	815.5
10°	806.7
12.5°	796.6
15°	785.6
17.5°	773.4
20°	759.1
22.5°	742.3
25°	722.5
27.5°	698.1
30°	669.1
32.5°	635.0
35°	597.1
37.5°	554.6
40°	507.5
42.5°	451.5
45°	385.4
47.5°	311.0
50°	233.5
52.5°	163.7
55°	108.6
57.5°	69.4
60°	44.6
62.5°	29.5
65°	19.8
67.5°	12.6
70°	8.0
72.5°	5.5
75°	4.2
77.5°	2.9
80°	2.1
82.5°	1.3
85°	0.8
87.5°	0.4
90°	0.0

(END OF REPORT)