

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246661

Luminaire Tested: **LD8B15D010 ER8B15950 8LBN0MW**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246661  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201839)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B15D010 ER8B15950 8LBN0MW  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 5000 CCT WITH MATTE WHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1332.0 lumens  
Efficiency: N/A  
Efficacy: 92.5 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.85  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246661

CATALOG NUMBER: LD8B15D010 ER8B15950 8LBN0MW

### Luminous Intensity Polar Plot

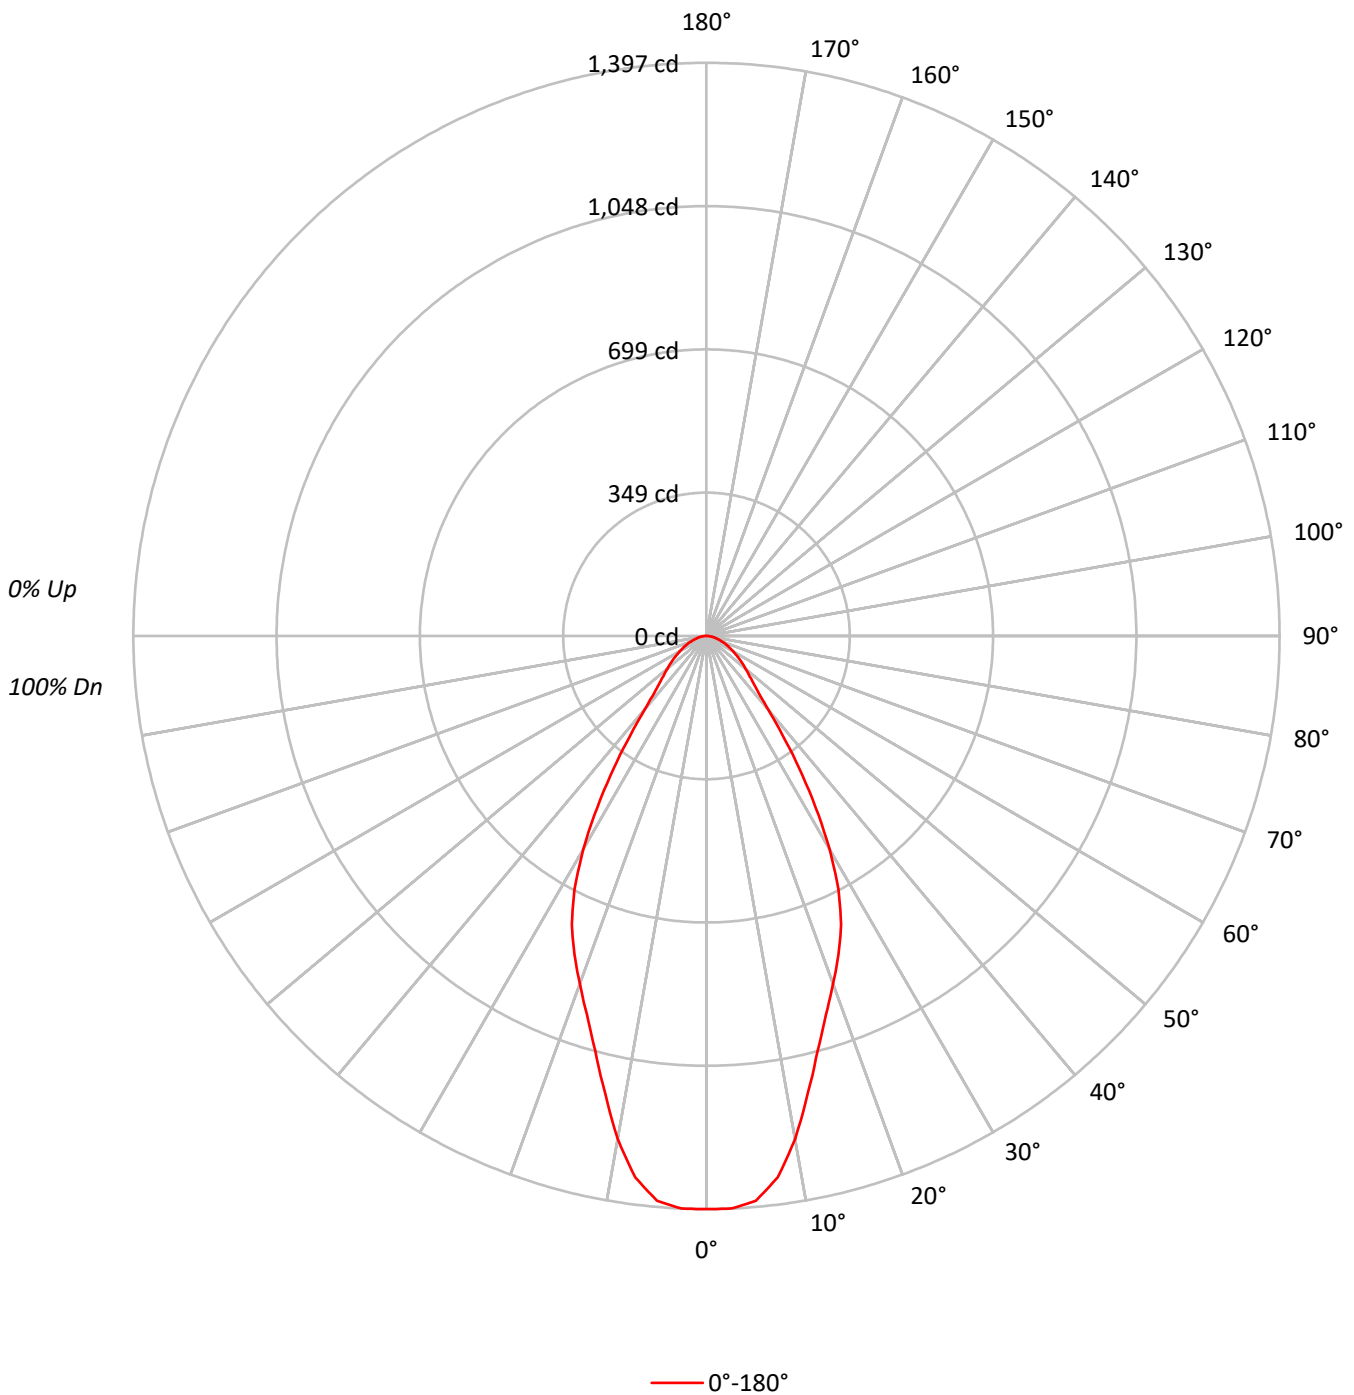



TEST NUMBER: P246661

CATALOG NUMBER: LD8B15D010 ER8B15950 8LBN0MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	109	106	104	101	102	100	98		98	97	95		95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	86	83	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	93	84	77	72	91	83	76	72	80	75	71		78	74	70		76	72	69	67
5	87	78	71	66	85	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67	62	59	57
7	78	67	60	56	76	67	60	55	65	59	55		64	59	55		63	58	54	53
8	74	63	56	52	72	62	56	51	61	55	51		60	55	51		59	54	51	49
9	70	59	53	48	69	59	52	48	58	52	48		57	51	48		56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45		54	48	45		53	48	45	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	43075
5°	42766
10°	38971
15°	33402
20°	29603
25°	26416
30°	21336
35°	14802
40°	9391
45°	6977
50°	5953
55°	5220
60°	4675
65°	4174
70°	3597
75°	3312
80°	3090
85°	2724



TEST NUMBER: P246661

CATALOG NUMBER: LD8B15D010 ER8B15950 8LBN0MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	127.4	9.6
10°-20°	294.7	22.1
20°-30°	350.5	26.3
30°-40°	247.8	18.6
40°-50°	127.9	9.6
50°-60°	87.7	6.6
60°-70°	56.9	4.3
70°-80°	29.9	2.2
80°-90°	9.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	772.7	58.0
0°-40°	1020.5	76.6
0°-60°	1236.1	92.8
0°-90°	1332.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1332.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1397	
5°	1382	127
15°	1046	295
25°	776	351
35°	393	248
45°	160	128
55°	97	88
65°	57	57
75°	28	30
85°	8	9
90°	0	1
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P246661

CATALOG NUMBER: LD8B15D010 ER8B15950 8LBN0MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1396.9
2.5°	1396.9
5°	1381.6
7.5°	1330.8
10°	1244.6
12.5°	1141.8
15°	1046.3
17.5°	967.8
20°	902.1
22.5°	840.0
25°	776.4
27.5°	696.6
30°	599.2
32.5°	494.4
35°	393.2
37.5°	303.0
40°	233.3
42.5°	187.8
45°	160.0
47.5°	139.8
50°	124.1
52.5°	110.4
55°	97.1
57.5°	85.4
60°	75.8
62.5°	65.6
65°	57.2
67.5°	49.6
70°	39.9
72.5°	34.3
75°	27.8
77.5°	22.5
80°	17.4
82.5°	12.9
85°	7.7
87.5°	4.4
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P246661

CATALOG NUMBER: LD8B15D010 ER8B15950 8LBN0MW

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)