

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250383

Luminaire Tested: **LD8B150D010 ER8B150830 8LBN0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P250383  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13948)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B150D010 ER8B150830 8LBN0B  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 3000 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8889.0 lumens  
Efficiency: N/A  
Efficacy: 56.1 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.77  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 158.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P250383

CATALOG NUMBER: LD8B150D010 ER8B150830 8LBN0B

### Luminous Intensity Polar Plot

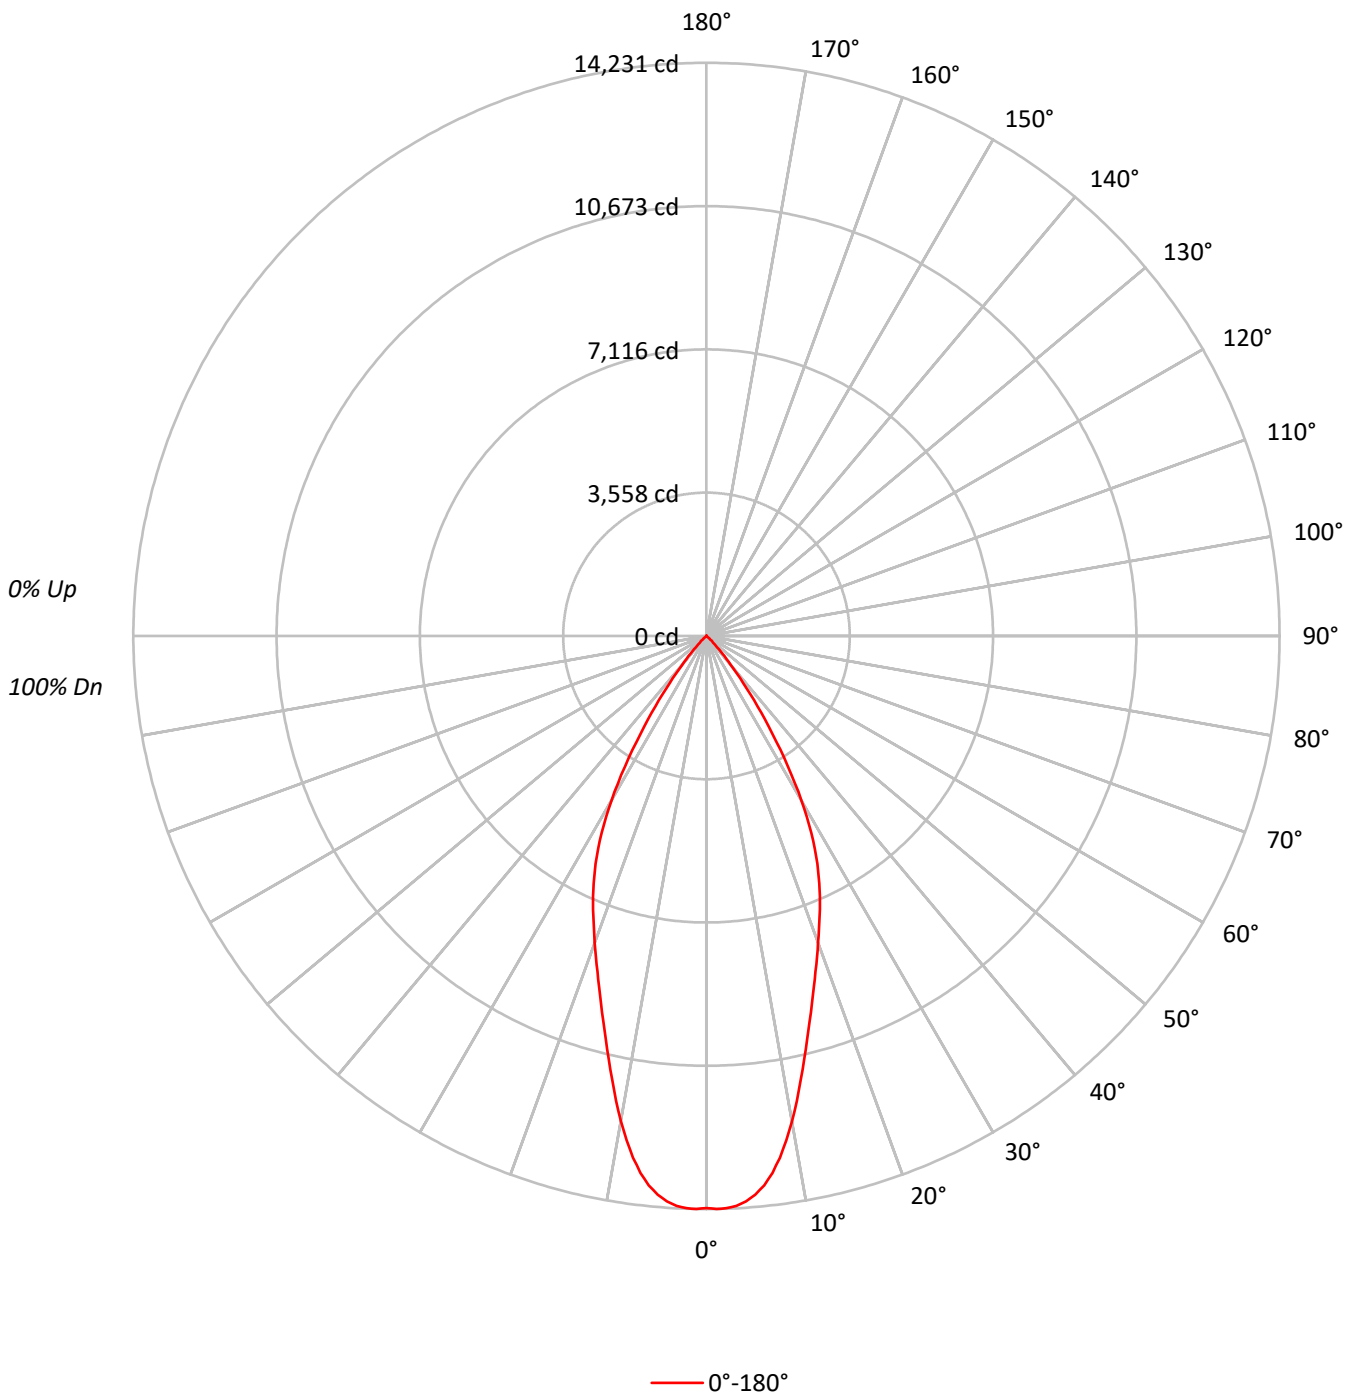



TEST NUMBER: P250383

CATALOG NUMBER: LD8B150D010 ER8B150830 8LBN0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	90	82	77	73	89	81	76	72	80	75	72	79	75	71	77	74	71	70
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66
8	83	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	437990
5°	430993
10°	382927
15°	315883
20°	266034
25°	224386
30°	168007
35°	95082
40°	37593
45°	10091
50°	1933
55°	0
60°	278
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P250383

CATALOG NUMBER: LD8B150D010 ER8B150830 8LBN0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1275.1	14.3
10°-20°	2771.3	31.2
20°-30°	2975.2	33.5
30°-40°	1608.0	18.1
40°-50°	250.9	2.8
50°-60°	6.9	0.1
60°-70°	1.7	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7021.5	79.0
0°-40°	8629.6	97.1
0°-60°	8887.3	100.0
0°-90°	8889.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8889.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	14204	
5°	13924	###
15°	9895	2771
25°	6595	2975
35°	2526	1608
45°	231	251
55°	0	7
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P250383

CATALOG NUMBER: LD8B150D010 ER8B150830 8LBNOB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	14203.7
1°	14230.7
2°	14217.3
3°	14168.6
4°	14075.1
5°	13923.6
6°	13715.0
7°	13434.4
8°	13083.2
9°	12678.9
10°	12229.4
11°	11757.9
12°	11268.7
13°	10780.0
14°	10326.0
15°	9894.8
16°	9498.9
17°	9116.4
18°	8760.6
19°	8427.5
20°	8107.0
21°	7795.7
22°	7501.9
23°	7208.9
24°	6902.0
25°	6594.9
26°	6283.5
27°	5928.0
28°	5536.4
29°	5136.7
30°	4718.4
31°	4269.3
32°	3819.8
33°	3375.3
34°	2926.2
35°	2525.8
37.5°	1614.3
40°	933.9
42.5°	498.2
45°	231.4
47.5°	124.8
50°	40.3
52.5°	4.5
55°	0.0
57.5°	4.5



TEST NUMBER: P250383

CATALOG NUMBER: LD8B150D010 ER8B150830 8LBN0B

**CANDELA DISTRIBUTION (continued):**

	0°
60°	4.5
62.5°	0.0
65°	0.0
67.5°	4.5
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)