

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247847

Luminaire Tested: **LD8B150D010 ER8B150840 8LBMOLI**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P247847  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-90)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B150D010 ER8B150840 8LBM0LI  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 4000 CCT WITH SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 16491.0 lumens  
Efficiency: N/A  
Efficacy: 104.0 lumens/watt  
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 158.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P247847

CATALOG NUMBER: LD8B150D010 ER8B150840 8LBM0LI

### Luminous Intensity Polar Plot

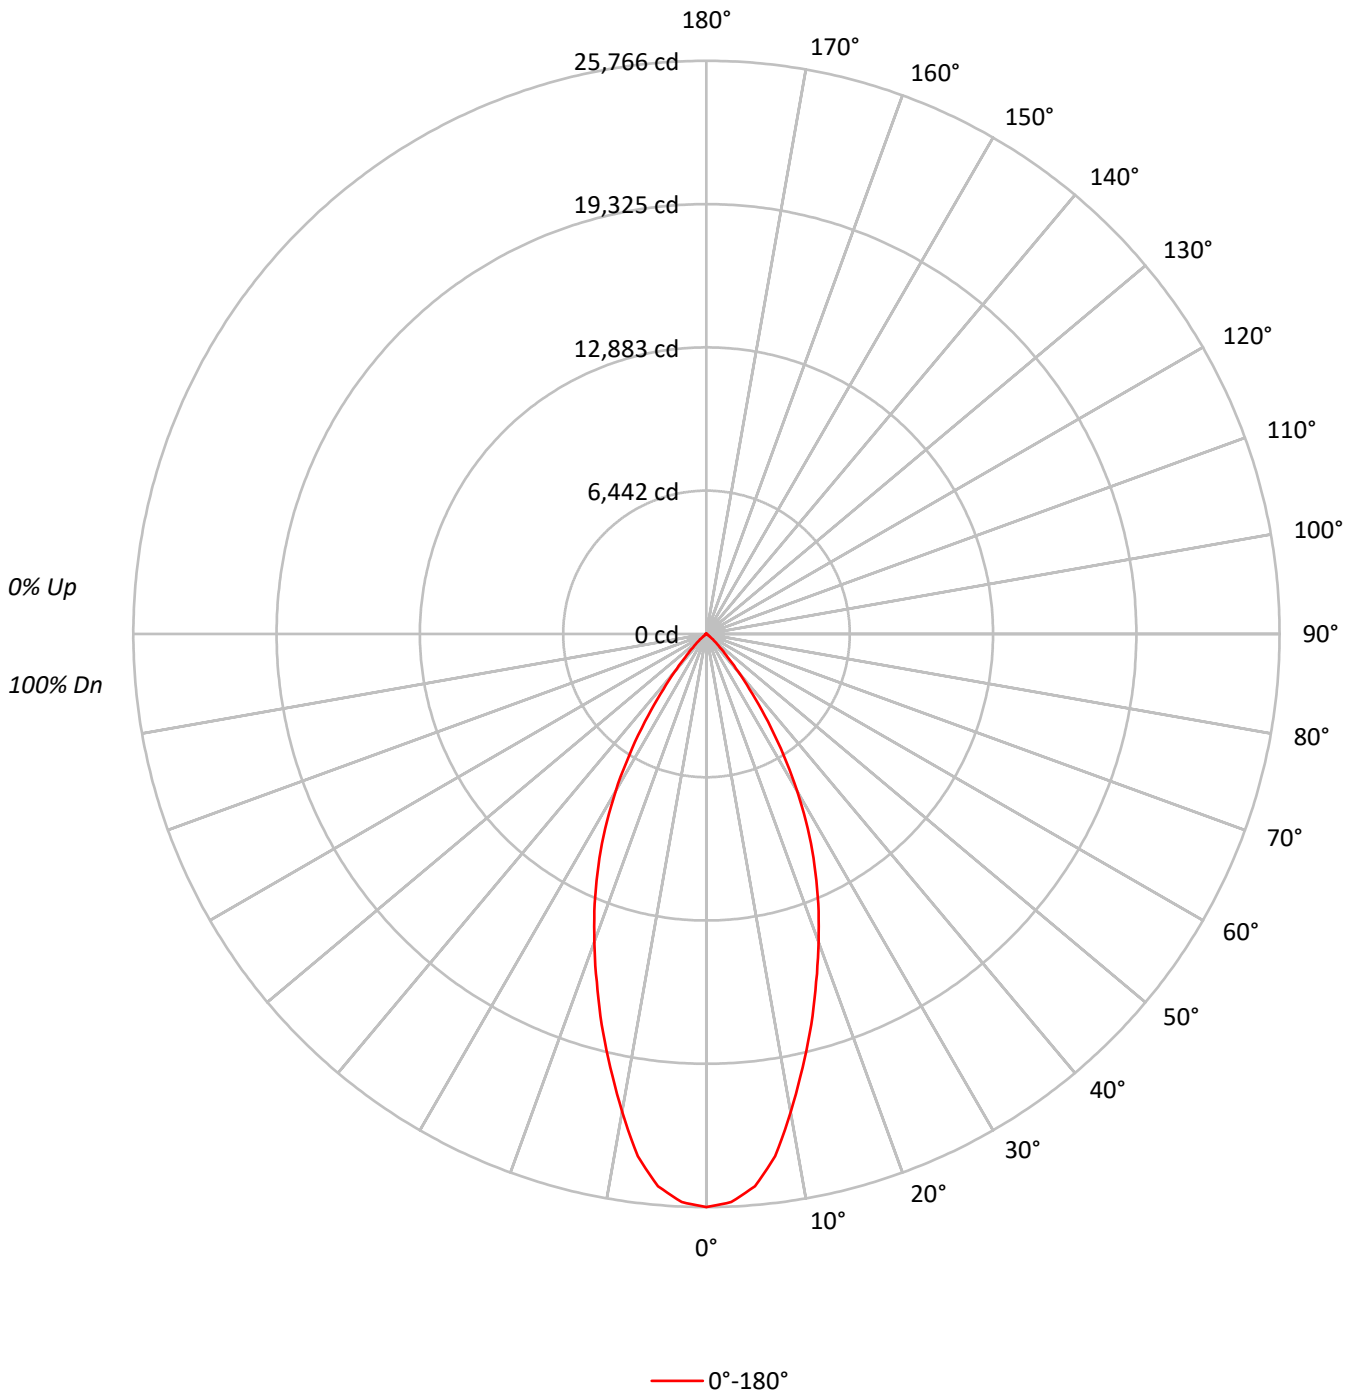



TEST NUMBER: P247847

CATALOG NUMBER: LD8B150D010 ER8B150840 8LBM0LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88
3	103	97	93	89	102	96	92	88	93	90	87	91	88	85	89	86	84	83
4	99	91	86	82	97	90	86	82	88	84	81	86	83	80	84	81	79	78
5	94	86	81	77	92	85	80	76	83	79	76	82	78	75	80	77	74	73
6	90	81	76	72	88	80	75	71	79	74	71	78	73	70	76	73	70	68
7	86	77	71	67	84	76	71	67	75	70	67	74	69	66	73	69	66	65
8	82	73	67	63	80	72	67	63	71	66	63	70	66	62	69	65	62	61
9	78	69	63	60	77	68	63	59	68	63	59	67	62	59	66	62	59	58
10	75	66	60	56	74	65	60	56	64	59	56	64	59	56	63	59	56	55

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	794538
5°	771745
10°	682993
15°	580527
20°	483350
25°	390900
30°	290515
35°	181336
40°	89295
45°	37779
50°	13677
55°	4220
60°	2270
65°	941
70°	983
75°	238
80°	355
85°	0



TEST NUMBER: P247847

CATALOG NUMBER: LD8B150D010 ER8B150840 8LBM0LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2280.2	13.8
10°-20°	5058.0	30.7
20°-30°	5225.0	31.7
30°-40°	3046.1	18.5
40°-50°	763.3	4.6
50°-60°	92.5	0.6
60°-70°	19.3	0.1
70°-80°	2.5	0.0
80°-90°	4.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	12563.2	76.2
0°-40°	15609.3	94.7
0°-60°	16465.1	99.8
0°-90°	16491.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	16491.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	25766	
5°	24932	###
15°	18185	5058
25°	11489	5225
35°	4817	3046
45°	866	763
55°	78	93
65°	13	19
75°	2	2
85°	0	4
90°	0	



TEST NUMBER: P247847

CATALOG NUMBER: LD8B150D010 ER8B150840 8LBM0LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	25766.3
2.5°	25566.7
5°	24931.9
7.5°	23682.1
10°	21812.5
12.5°	19960.8
15°	18184.6
17.5°	16402.4
20°	14729.4
22.5°	13122.1
25°	11488.9
27.5°	9864.7
30°	8159.0
32.5°	6476.1
35°	4817.1
37.5°	3384.6
40°	2218.3
42.5°	1397.7
45°	866.3
47.5°	528.5
50°	285.1
52.5°	139.1
55°	78.5
57.5°	42.7
60°	36.8
62.5°	25.8
65°	12.9
67.5°	15.9
70°	10.9
72.5°	0.0
75°	2.0
77.5°	1.0
80°	2.0
82.5°	3.0
85°	0.0
87.5°	10.9
90°	0.0

(END OF REPORT)