

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250698

Luminaire Tested: **LD8B150D010 ER8B1509727 8LBN0MW**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250698
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P131425)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B150D010 ER8B1509727 8LBN0MW
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT
97 CRI 2700 CCT WITH MATTE WHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10121.0 lumens
Efficiency: N/A
Efficacy: 63.9 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 158.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250698

CATALOG NUMBER: LD8B150D010 ER8B1509727 8LBN0MW

Luminous Intensity Polar Plot

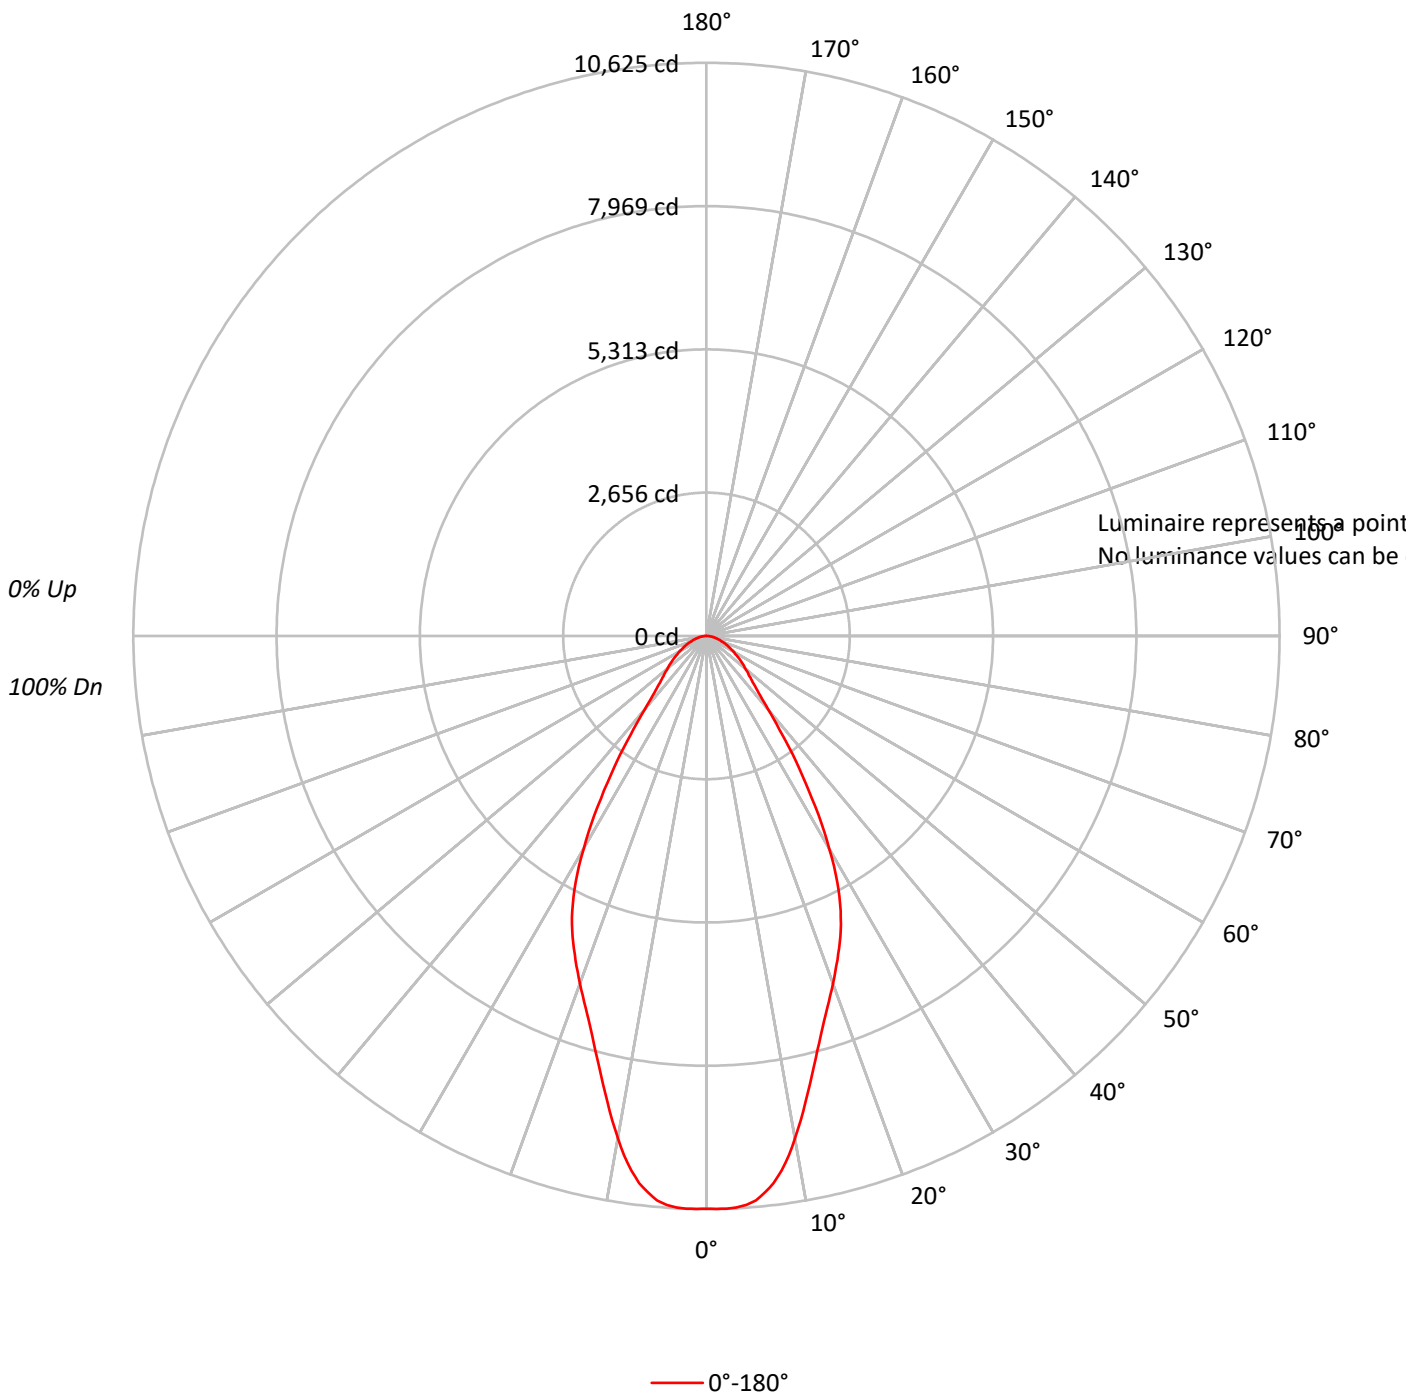



TEST NUMBER: P250698

CATALOG NUMBER: LD8B150D010 ER8B1509727 8LBN0MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	109	106	104	101	102	100	98		98	97	95		95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	86	83	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	93	84	77	72	91	83	76	72	80	75	71		78	74	70		76	72	69	67
5	87	78	71	66	85	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67	62	59	57
7	78	67	60	56	76	67	60	55	65	59	55		64	59	55		63	58	54	53
8	74	63	56	52	72	62	56	51	61	55	51		60	55	51		59	54	51	49
9	70	59	53	48	69	59	52	48	58	52	48		57	51	48		56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45		54	48	45		53	48	45	43

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P250698

CATALOG NUMBER: LD8B150D010 ER8B1509727 8LBN0MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	969.3	9.6
10°-20°	2236.5	22.1
20°-30°	2665.6	26.3
30°-40°	1881.6	18.6
40°-50°	971.7	9.6
50°-60°	666.8	6.6
60°-70°	433.5	4.3
70°-80°	227.0	2.2
80°-90°	69.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5871.5	58.0
0°-40°	7753.0	76.6
0°-60°	9391.6	92.8
0°-90°	10121.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10121.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10618	
5°	10502	969
15°	7954	2237
25°	5900	2666
35°	2990	1882
45°	1214	972
55°	740	667
65°	436	434
75°	210	227
85°	58	69
90°	0	



TEST NUMBER: P250698

CATALOG NUMBER: LD8B150D010 ER8B1509727 8LBN0MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	10618.3
1°	10624.8
2°	10624.8
3°	10608.6
4°	10573.1
5°	10502.0
6°	10376.1
7°	10221.1
8°	10007.9
9°	9749.6
10°	9459.0
11°	9152.1
12°	8832.3
13°	8525.6
14°	8228.5
15°	7954.1
16°	7698.9
17°	7463.2
18°	7250.0
19°	7049.8
20°	6856.0
21°	6665.5
22°	6478.2
23°	6290.9
24°	6100.4
25°	5900.1
26°	5674.0
27°	5428.6
28°	5160.6
29°	4876.4
30°	4553.4
31°	4240.2
32°	3920.4
33°	3591.1
34°	3287.5
35°	2990.5
37.5°	2302.6
40°	1773.0
42.5°	1427.4
45°	1214.2
47.5°	1062.4
50°	943.0
52.5°	839.7
55°	739.6
57.5°	649.2



TEST NUMBER: P250698

CATALOG NUMBER: LD8B150D010 ER8B1509727 8LBN0MW

CANDELA DISTRIBUTION (continued):

	0°
60°	574.8
62.5°	500.6
65°	436.0
67.5°	377.8
70°	303.6
72.5°	261.6
75°	210.0
77.5°	171.1
80°	132.4
82.5°	96.9
85°	58.2
87.5°	32.2
90°	0.0

(END OF REPORT)